



#### ■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- "UL8750 listed" safety approved for HLG-80H-□BL
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)















HLG-80H-12 A

TAIWAN

Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

 $B:IP67\ rated.\ Constant\ current\ level\ adjustable\ through\ output\ cable\ with\ 1\sim10Vdc\ or\ 10V\ PWM\ signal\ or\ resistance.$ 

BL (option): Contact MEAN WELL for details.


D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.

#### **SPECIFICATION**


SPECIFIC MODEL	ATION	HLG-80H-12	UI C 00U 1F	NI C 80N 30	HLG-80H-24	HLG-80H-30	ni	HLG-80H-42	HLG-80H-48	HLG-80H-54					
MODEL		_							_						
ОИТРИТ	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V					
	CONSTANT CURRENT REGION Note.4		9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V					
	RATED CURRENT	5A	5A	4A	3.4A	2.7A	2.3A	1.95A	1.7A	1.5A					
	RATED POWER	60W	75W	80W	81.6W	81W	82.8W	81.9W	81.6W	81W					
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p					
	VOLTAGE ADJ. RANGE Note.6			17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V					
	CURRENT ADJ. RANGE			ootentiometer A			4.00 0.04	4.47 4.054							
	VOLTAGE TOLERANCE Note.3	3 ~ 5A	3 ~ 5A ±2.0%	2.4 ~ 4A ±1.0%	2.04 ~ 3.4A ±1.0%	1.62 ~ 2.7A ±1.0%	1.38 ~ 2.3A ±1.0%	1.17 ~ 1.95A ±1.0%	1.02 ~ 1.7A ±1.0%	0.9 ~ 1.5A ±1.0%					
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	HOLD UP TIME (Typ.)	2000ms, 80ms			ums, oums / 23	0VAC at full load	1; B type 200	ums, zuums at	95% 1080 231	)VAC / 115VAC					
	, , , ,														
		90 ~ 305VAC 127 ~ 431VDC													
	FREQUENCY RANGE	47 ~ 63Hz													
	POWER FACTOR (Typ.)	PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)  THD< 20% when output loading ≥ 60% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input													
INPUT			89%			· ·	91%	≤ 75% at 277 v	91%	91%					
	EFFICIENCY (Typ.)	88%		90%	90.5%	91%	91%	91%	91%	91%					
	AC CURRENT (Typ.)	0.85A / 115VAC													
	INRUSH CURRENT (Typ.)	COLD START 70A(twidth=485/±s measured at 50% Ipeak) at 230VAC  <0.75mA / 277VAC													
	LEAKAGE CURRENT														
	OVER CURRENT Note.4	95 ~ 108%													
		Protection type: Constant current limiting, recovers automatically after fault condition is removed  Hiccup mode, recovers automatically after fault condition is removed													
PROTECTION	SHORT CIRCUIT						44 40)/	40 501/	54 001/	FO COV					
	OVER VOLTAGE	14 ~ 17V	18 ~ 24V	23 ~ 30V o/p voltage, re-	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 63V	59 ~ 68V					
	OVED TEMPEDATURE				•	covei									
	OVER TEMPERATURE		Shut down o/p voltage, re-power on to recover  -40 ~ +70 °C (Refer to "Derating Curve")												
	WORKING TEMP.		non-condensir												
ENVERANMENT.	WORKING HUMIDITY			ig											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 1													
	TEMP. COEFFICIENT	±0.03%/℃ (0	- /												
	VIBRATION	-				ong X, Y, Z axes									
	SAFETY STANDARDS Note.7	UL8750, CSA C22.2 No. 250.0-08(except for HLG-80H-48/54V & HLG-80H-48/54BL), UL8750 listed for HLG-80H- BL													
0.4.5553/.0		EN61347-1, EN61347-2-13 independent, J61347-1, J61347-2-13, IP65 or IP67 approved; Design refer to UL60950-1, TUV EN60950-1/P-0/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC													
SAFETY &	WITHSTAND VOLTAGE														
EMC	ISOLATION RESISTANCE		-,	00M Ohms / 50											
	EMC EMISSION	Compliance to EN55015, EN61000-3-2 Class C (≥60% load); EN61000-3-3													
	EMC IMMUNITY	<u> </u>				5024, light indu	ıstry level (surç	ge 4KV), criter	ia A						
	MTBF	357.8K hrs min. MIL-HDBK-217F (25℃)													
OTHERS	DIMENSION	195.6*61.5*38.8mm (L*W*H)													
	PACKING	0.84Kg; 16pcs/14.4Kg/0.54CUFT													
NOTE	Ripple & noise are measure     Tolerance : includes set up     Please refer to "DRIVING N	ly mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  and at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  tolerance, line regulation and load regulation.  IETHODS OF LED MODULE".  ander low input voltages. Please check the static characteristics for more details.													

- A type chily.
   Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
   Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
   The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 10. Refer to warranty statement.



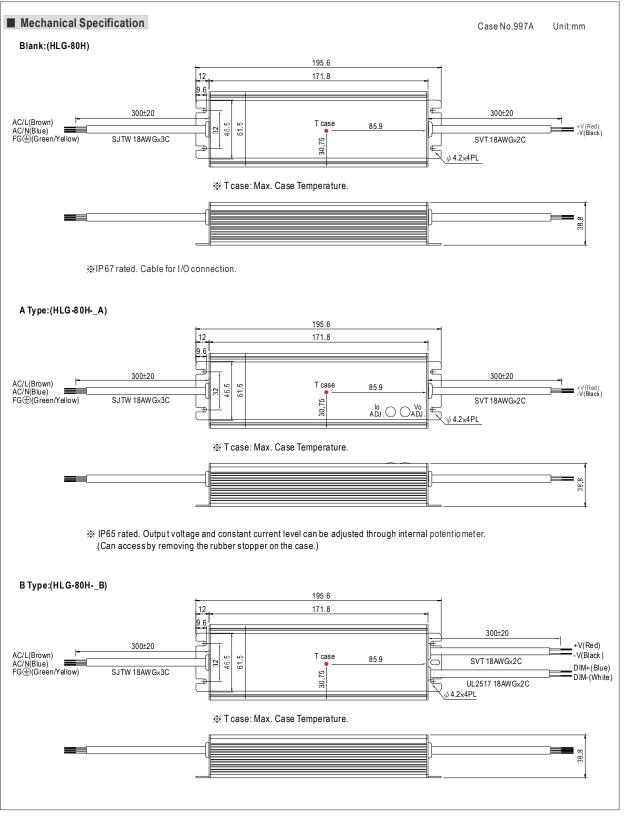




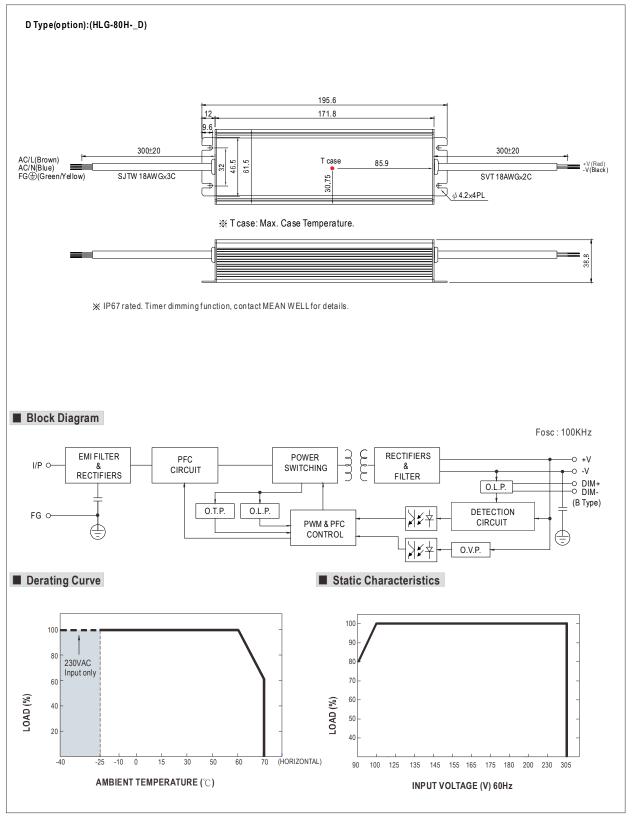




### ■ Power Factor Characteristic

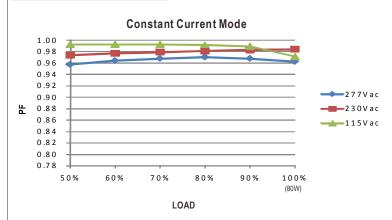

## ■ EFFICIENCY vs LOAD (48V Model)

HLG-80H series possess superior working efficiency that up to  $9\,1\%$  can be reached in field applications.

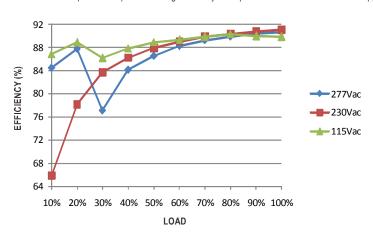


# ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode [with LED driver, at area (A)] and CC mode [direct drive, at area (B)].

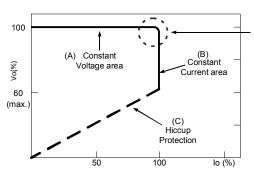


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



# **■** DIMMING OPERATION



- 💥 Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or
  - 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".

 $\frak{R}$  Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	<b>10K</b> Ω	<b>20K</b> Ω	<b>30K</b> Ω	<b>40K</b> Ω	<b>50K</b> Ω	<b>60K</b> Ω	<b>70K</b> Ω	80K Ω	90KΩ	<b>100K</b> Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ <i>I</i> N	50KΩ/N	60KΩ <i>I</i> N	70KΩ/N	80KΩ <i>I</i> N	90KΩ/N	100KΩ/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

#### $\times 1 \sim 10V$ dimming function for output current adjustment (Typical)

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%


#### $\times$ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3 KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

 $\fint \fint \fin$ 

Dimming connection diagram for turning the lighting fixture ON/OFF:

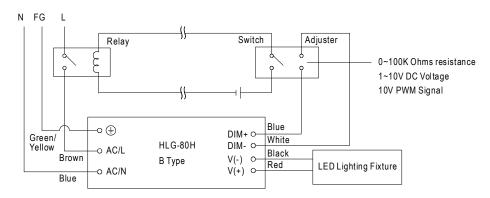

Using a switch and relay can turn ON/OFF the lighting fixture.

- $1. Output \ constant \ current \ level \ can \ be \ adjusted \ through \ output \ cable \ by \ connecting \ a \ resistance \ or \ 1 \sim 10 \ V \ PWM \ signal \ between \ DIM+ \ and \ DIM-.$
- 2.The LED lighting fixture can be turned ON/OFF by the switch.



