

# Pin Headers

**F2327** = Product group; Product group discount F 23 2\_

Part Nr.	Part description
WSL072ZW	Pin Header 72-Pole Angled 2R Sn
WSL080ZW	Pin Header 80-Pole Angled 2R Sn

**Pin Headers**  
 Double Row, Angled  
 Pitch: 2,54mm  
 Series: WSL\_W

## Features

- Tin-plated version
- Arbitrary mounting

## Technical Specifications

Insulation Shell: .....Polyamide, UL94V-0  
 Contact Material: .....Brass  
 Contact Surface: .....Tin  
 Rated Current: .....1A  
 Temperature Range: .....-55...+105°C  
 Dielectric Strength (1 Min.): .....1000V AC  
 Insulation Resistance (500V DC): .....1000MΩ


## Dimensions

A: .....2,54mm x Number of Contact Pins  
 B: .....2,54mm x (Number of Contact Pins - 1)  
 Pin Cross Section, Max.: .....0,64x0,64mm


## Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces

**Manufacturer:** Various

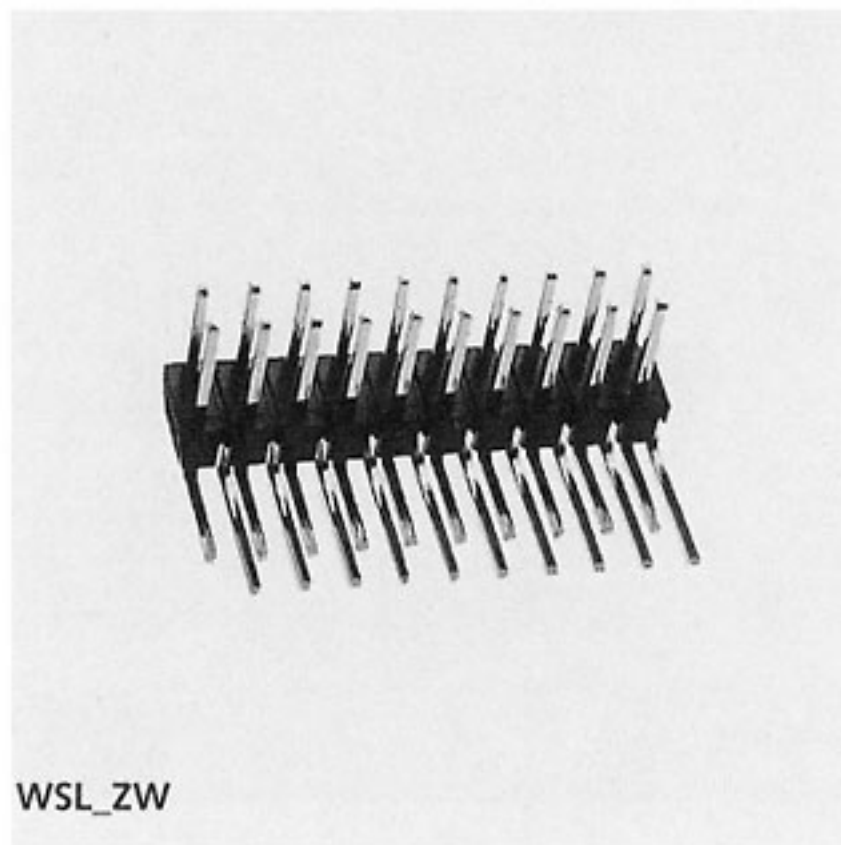

WSL\_ZW

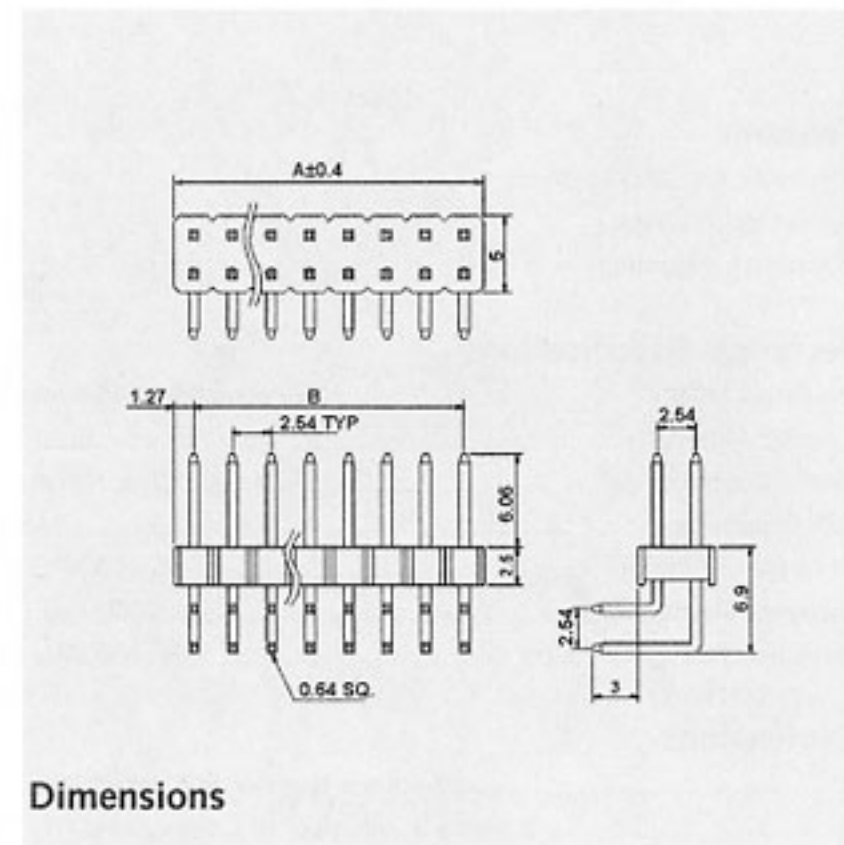

Dimensions

**F2331** = Product group; Product group discount F 23 3\_

Part Nr.	Part description
ASL025Z	Pin Header 25-Pole Straight 1R Sn

**MPE GARRY Pin Header**  
 Single Row, Straight  
 Pitch: 5,08mm  
 Series: ASL

## Features

- Tin-plated version
- Arbitrary mounting

## Technical Specifications

Insulation Shell: .....Thermoplastic, UL94V-0  
 Contact Material (DIN17660): .....Copper alloy  
 Contact Surface: .....4...6µm Sn Over 2,5µm Ni  
 Insulation Resistance, Max.: .....≤20mΩ  
 Rated Current: .....3A  
 Rated Voltage: .....500V AC  
 Insulation Resistance, Min.: .....>10<sup>9</sup>Ω  
 Temperature Range: .....-55...+125°C  
 Short Term (5s): .....+260°C  
 Solderability: .....IEC68-2-20

## Dimensions


Pin Length (A): .....12,6mm  
 Pin Length, Plug-in Area(B): .....6,8mm  
 Pin Length, Solder Area (C): .....3,3mm  
 Pin Cross Section: .....0,635x0,635mm

## Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

**Manufacturer:**

<http://www.mpegarry.de>

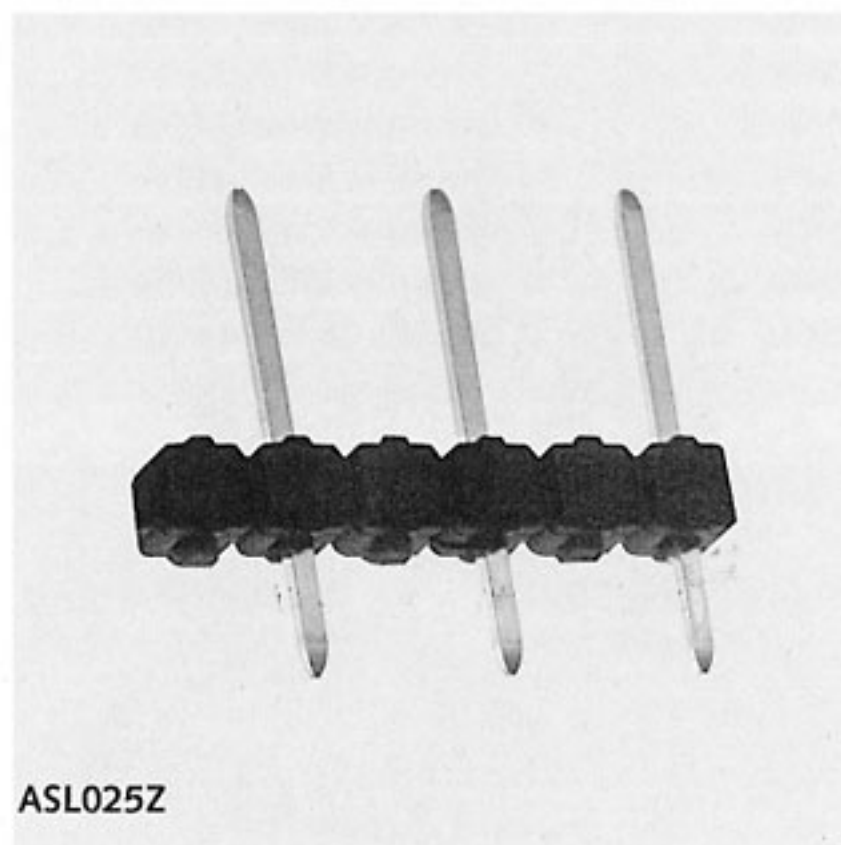

ASL025Z

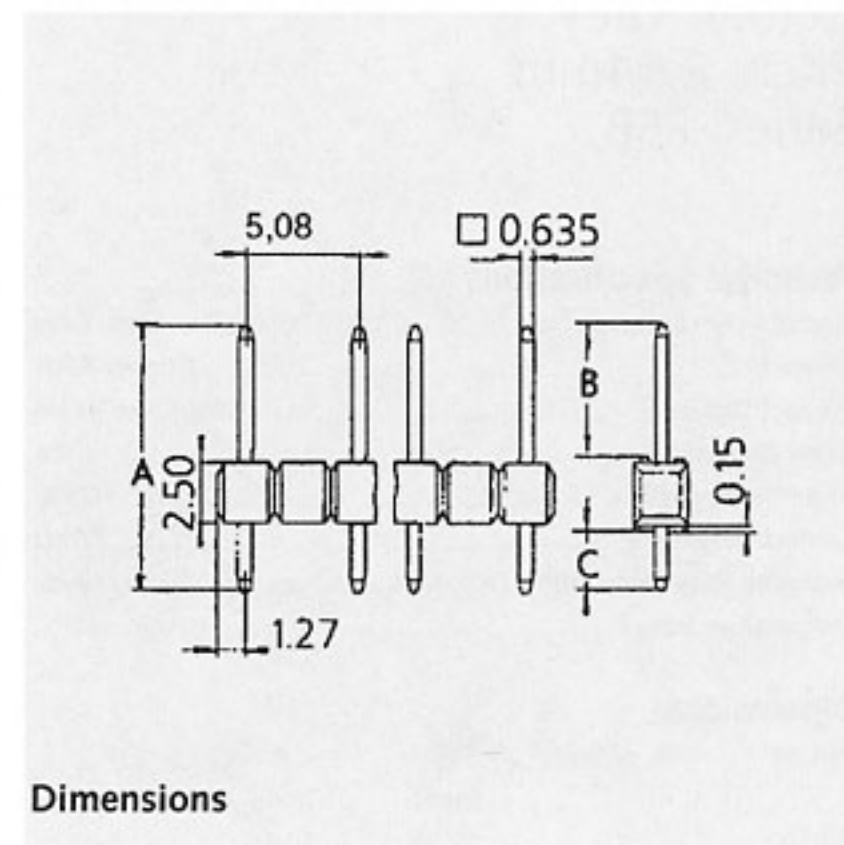

Dimensions