

#### **Technical Data Sheet**

#### 1.9mm Round Subminiature Lead LEDs

#### 95-21SURC/S530-XX/XX

#### **Features**

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free

#### **Descriptions**

- The 95-21 SMD taping is much smaller than leaded components.
   Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.

### **Applications**

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Automotive : backlighting in dashboards and switches.
- Telecommunication: indicator and backlighting in telephone and fax.

#### **Device Selection Guide**


Chip		T 0.1	
Material	Emitted Color	Lens Color	
AlGaInP	Hyper Red	Water Clear	

F7/TR7 F9/TR9 F10/TR10

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 10

### 95-21SURC/S530-XX/XX

#### **Package Outline Dimensions**

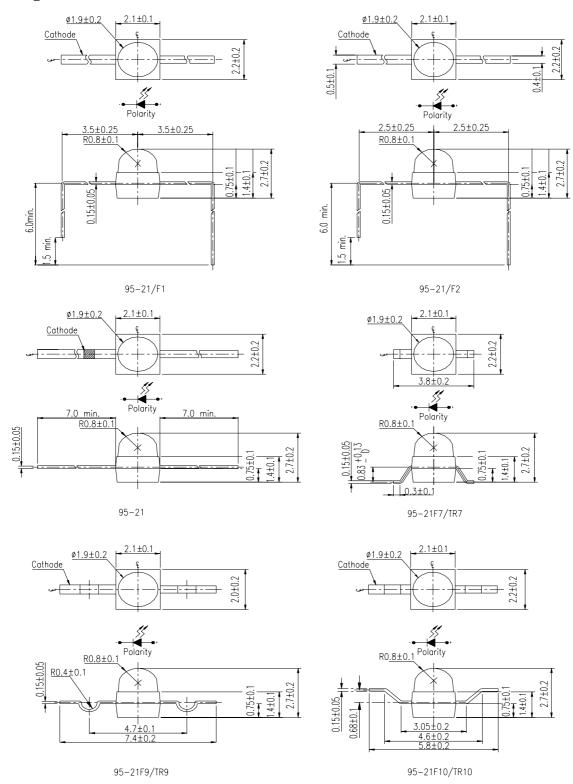

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm. Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 2 of 10



## 95-21SURC/S530-XX/XX

## Absolute Maximum Ratings (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!$
Storage Temperature	Tstg	-40 <b>~</b> +100	$\mathbb{O}$
Soldering Temperature	Tsol	260( for 5 second)	$^{\circ}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @ 1KHz)	IFP	60	mA

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10



## 95-21SURC/S530-XX/XX

## **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Chip Rank	MIN.	TYP.	MAX.	Unit	Condition	
Luminous Intensity	Iv	A2		29			I <sub>F</sub> =2mA	
			198	482		mcd	I <sub>F</sub> =20mA	
		А3		36			I <sub>F</sub> =2mA	
			400	600			I <sub>F</sub> =20mA	
		A4		49			I <sub>F</sub> =2mA	
			550	820			I <sub>F</sub> =20mA	
		A5		61			I <sub>F</sub> =2mA	
			665	1020			I <sub>F</sub> =20mA	
		A6		74			I <sub>F</sub> =2mA	
			802	1232			I <sub>F</sub> =20mA	
Viewing Angle	2 \theta 1/2			25		deg	I <sub>F</sub> =20mA	
Peak Wavelength	λp			632		nm		
Dominant Wavelength	λd			624		nm		
Spectrum Radiation Bandwidth	Δλ			20		nm		
Forward Voltage	VF			2.0	2.4	V		
Reverse Current	IR				10	$\mu$ A	V <sub>R</sub> =5V	

## \*95-21SURC/S530-<u>XX</u> / <u>XXX</u>

1 2

1:Chip Rank

2:Packing Method:


(1) None,F1,F2, F7,F9,F10: Bulk

(2) TR7,TR9,TR10: Taping

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 4 of 10

#### 95-21SURC/S530-XX/XX

#### **Typical Electro-Optical Characteristics Curves**

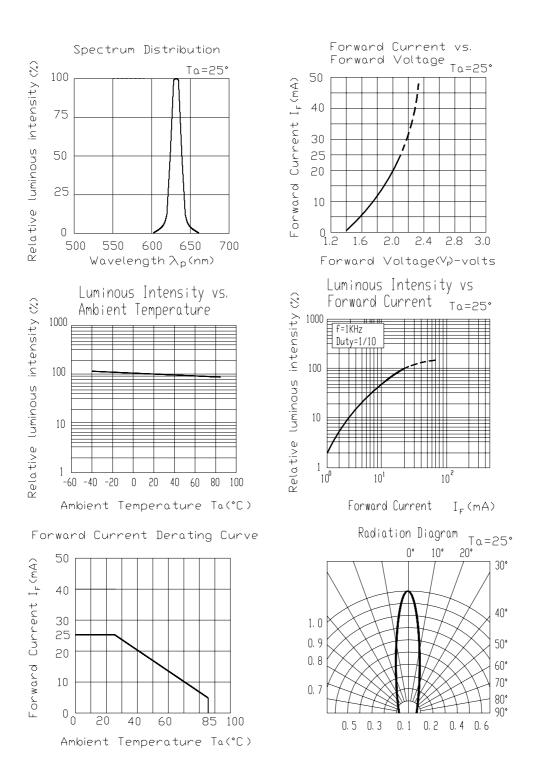

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 5 of 10



### 95-21SURC/S530-XX/XX

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




### **Reel & Carrier Tape Dimensions**

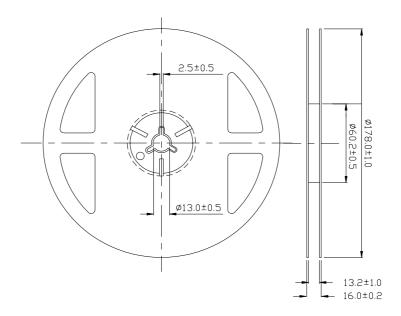

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 6 of 10


#### 95-21SURC/S530-XX/XX

#### Loaded quantity 1000 PCS per reel

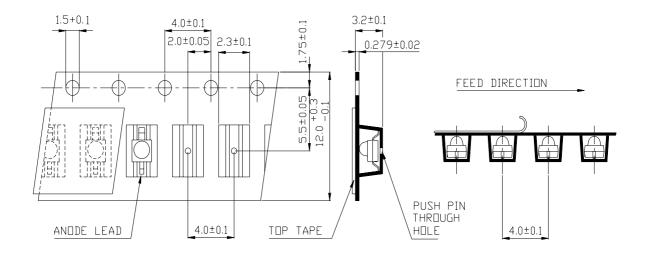

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm ,Unit = mm

### **Moisture Resistant Packaging**

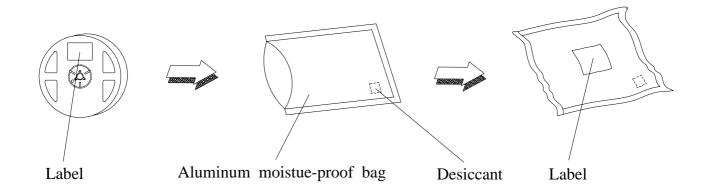

Everlight Electronics Co., Ltd. Device No.: SZDLE-952-009

http://www.everlight.com Prepared date: 08-06-004 Rev. 1 Page: 7 of 10

Prepared by: Aihua hong



### 95-21SURC/S530-XX/XX

#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}C$ 15 min. $\int 5 \text{ min.}$ $L: -40^{\circ}C$ 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5 min. $\int 10 \text{ sec.}$ $L: -10^{\circ}\mathbb{C}$ 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 8 of 10



### 95-21SURC/S530-XX/XX


#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

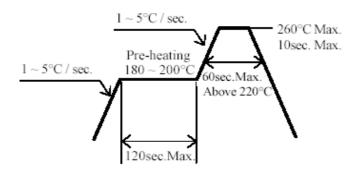

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 9 of 10



#### 95-21SURC/S530-XX/XX

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

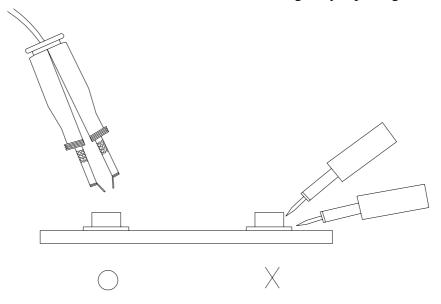

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10