



HAHN QUALITÄT

Leistung, die Vertrauen schafft.



[Home](#)
[Companies](#)
[HAHN-quality](#)
[Products](#)
[Product Search](#)
[Contact](#)
[Jobs & Careers](#)
[download](#)
[Measuring](#)



Product Overview
Print transformers
Series BV 20
Series EI 30
Series EI 34
Series EI 38
Series EI 42
Series EI 48
Series EI 54
Series EI 60
Series EI 66
Series EI 78-EI 96
Series EI 78
Series EI 84
Series EI 96
low Profile transformers
Transformers RAST5
Unforged transformers
special transformers
flyback converter
DC converter
Chokes with iron core
Energy storage chokes
special coils
DIN rail
Toroidal designs
Compact Power Supplies
production search
catalog download


EI 30 Printed circuit transformers, power 0.5VA to 3.6 VA



More customer use through convincing quality from more than 40 years of experience in transformer construction.

- Minimum size
- With ENEC 10, VDE, UL and CSA certification marks
- With VDE certificate for passed glow wire test according to EN 60335-1: 2005
- Primary voltages from 12 V - 440 V or 2 x 12V to 2 x 125V
- Secondary voltages from 2 V to 38 V or 2 x 2 V to 2 x 19 V
- Performance up to 3.6 VA
- Further versions on request
- Absolutely short-circuit proof
- Vacuum-sealed, two-chamber winding
- Temperature classes ta 40 ° C / F to ta 70 ° C / F
- Highest safety and durability
- Piece tested quality with test certificate
- Excellent temperature change behavior
- Self-extinguishing potting and cap material

Several 100 types stand for maximum safety and longevity when used on PCBs, household appliances, entertainment electronics, heating and control systems as well as in the assembly industry. Transformers for special requirements with low idle power are also included in the delivery program.

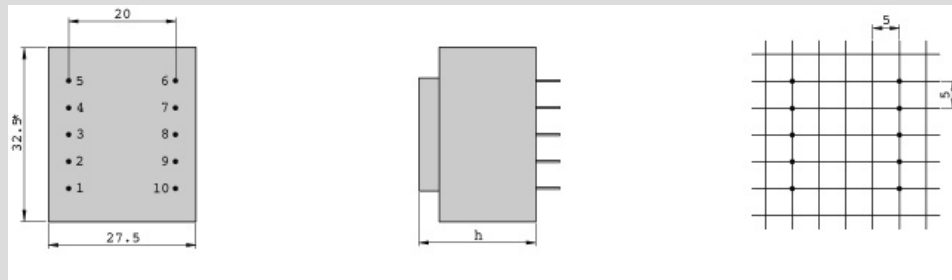

View on the pins

Dimensions without tolerance ± 0.3 mm
Design changes reserved

Size / Packaging height	Power ta 40 ° C / F	Power ta 70 ° C / F	Height (h)	mass	Packaging Unit
BV EI 301 ** ... / 5.5 mm	0.6 VA	0.5 / 0.7 VA	15.2 mm	0.044 kg	50 pieces
BV EI 302 / 10.5 mm	1.8 VA	1.5 VA	21.8 mm	0.070 kg	50 pieces
BV EI 307 / 11.5 mm	2.2 VA	1.8 VA	22.1 mm	0.076 kg	50 pieces
BV EI 303 / 12.5 mm	2.3 VA	1.9 VA	23.8 mm	0.081 kg	50 pieces
BV EI 304 / 15.5 mm	2.6 VA	2.1 VA	27.4 mm	0.099 kg	50 pieces
BV EI 305 / 18.0 mm	3.0 VA	2.3 VA	29.5 mm	0.111 kg	50 pieces
BV EI 306 / 23.0 mm	3.6 VA	3.0 VA	34.0 mm	0.135 kg	50 pieces

** BV EI 301 Tolerance range + 0.3 / -0.5

Each transformer of the EI 30 series is manufactured from proven and lance-tested raw materials and manufactured on state-of-the-art production systems. A 100% test is carried out twice, and a 200 hour permanent short-circuit test is carried out sporadically after production in order to ensure uniform quality. Each delivery will receive a test certificate, so you can lift the warranty for 100% security in your devices.

EI 301 ...

Size / Packaging height	Power ta 40 ° C / F	Power ta 70 ° C / F	Height (h)	mass	Packaging Unit
BV EI 301 ... / 5.5 mm	0.6 VA	0.5 VA	15.2 mm	0.044 kg	50 pieces

SERIENTYPEN EI 301 ...

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2069	0.5	1x 230	1-5	2x 18	14	6-7 / 9-10	2x 27.2
Show	BV EI 301 2783	0.5	1x 230	1-5	1x 10	50	7-9	1x 14.9
Show	BV EI 301 2824	0.5	1x 230	1-5	1x 12	42	7-9	1x 18
Show	BV EI 301 2845	0.5	1x 230	1-5	1x 15	33	7-9	1x 22.8
Show	BV EI 301 2911	0.5	1x 230	1-5	1x 9	56	7-9	1x 14.7
Show	BV EI 301 2967	0.5	1x 230	1-5	1x 18	28	7-9	1x 26.5

Show	BV EI 301 3005	0.5	1x 230	1-5	1x 6	83	7-9	1x 10.2
Show	BV EI 301 3017	0.5	1x 230	1-5	1x 7.5	67	7-9	1x 12.2
Show	BV EI 301 3020	0.5	1x 230	1-5	1x 21	24	7-9	1x 33.1

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2093	0.6	1x 230	1-5	1x 15	40	7-9	1x 23.7
Show	BV EI 301 2094	0.6	1x 230	1-5	1x 24	25	7-9	1x 38.6
Show	BV EI 301 2104	0.6	1x 230	1-5	1x 6	100	7-9	1x 9.6
Show	BV EI 301 2720	0.6	1x 230	1-5	1x 12	50	7-9	1x 19.4
Show	BV EI 301 2985	0.6	1x 230	1-5	1x 18	33	7-9	1x 27.8
Show	BV EI 301 3006	0.6	1x 230	1-5	1x 10	60	7-9	1x 16.1
Show	BV EI 301 3007	0.6	1x 230	1-5	1x 21	28	7-9	1x 33.2
Show	BV EI 301 3016	0.6	1x 230	1-5	1x 9	67	7-9	1x 14.2
Show	BV EI 301 3018	0.6	1x 230	1-5	1x 7.5	80	7-9	1x 11.6

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 3582	0.7	1x 230	1-5	1x 6	117	7-9	1x 10.3
Show	BV EI 301 3583	0.7	1x 230	1-5	2x 6	58	6-7 / 9-10	2x 10.5
Show	BV EI 301 3584	0.7	1x 230	1-5	1x 7.5	94	7-9	1x 12.7
Show	BV EI 301 3585	0.7	1x 230	1-5	2x 7.5	47	6-7 / 9-10	2x 12.7
Show	BV EI 301 3586	0.7	1x 230	1-5	1x 9	78	7-9	1x 14.6
Show	BV EI 301 3587	0.7	1x 230	1-5	2x 9	39	6-7 / 9-10	2x 14.6
Show	BV EI 301 3588	0.7	1x 230	1-5	1x 12	58	7-9	1x 19.5
Show	BV EI 301 3589	0.7	1x 230	1-5	2x 12	29	6-7 / 9-10	2x 19.5
Show	BV EI 301 3590	0.7	1x 230	1-5	1x 15	47	7-9	1x 24.5
Show	BV EI 301 3591	0.7	1x 230	1-5	2x 15	23	6-7 / 9-10	2x 24.5
Show	BV EI 301 3592	0.7	1x 230	1-5	1x 18	39	7-9	1x 28.3
Show	BV EI 301 3593	0.7	1x 230	1-5	1x 21	33	7-9	1x 32.9
Show	BV EI 301 3594	0.7	1x 230	1-5	1x 24	29	7-9	1x 37.8

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2343	0.5	1x 24	1-5	1x 24	20	7-9	1x 35.5
Show	BV EI 301 2784	0.5	1x 24	1-5	1x 10	50	7-9	1x 14.9

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2497	0.5	1x 42	1-5	1x 24	20	7-9	1x 35.5
Show	BV EI 301 2785	0.5	1x 42	1-5	1x 10	50	7-9	1x 14.9

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2300	0.5	1x 110	1-5	1x 12	42	7-9	1x 18
Show	BV EI 301 2334	0.5	1x 110	1-5	1x 24	20	7-9	1x 35.5
Show	BV EI 301 2721	0.5	1x 110	1-5	1x 15	33	7-9	1x 22.8
Show	BV EI 301 2786	0.5	1x 110	1-5	1x 10	15	7-9	1x 14.9

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2503	0.6	1x 120	1-5	1x 12	50	7-9	1x 19.4
Show	BV EI 301 2713	0.6	1x 110	1-5	1x 12	50	7-9	1x 19.4
Show	BV EI 301 2850	0.6	1x 115	1-5	1x 10	60	7-9	1x 16.1

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2841	0.5	1x 115	1-5	1x 12	42	7-9	1x 18

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2439	0.5	1x 120	1-5	1x 24	20	7-9	1x 35.5

Back to the sizes

data sheet	Order number	Power VA	Voltage prim. V	Connection pins prim.	Voltage sec. V	Current sec. mA	Connection pins sec.	
Show	BV EI 301 2215	0.5	1x 240	1-5	1x 12	42	7-9	1x 18
Show	BV EI 301 2256	0.5	1x 240	1-5	1x 24	20	7-9	1x 35.5
Anzeigen	BV EI 301 2787	0.5	1x 240	1-5	1x 10	50	7-9	1x 14.9

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 301 2114	0.5	1x 380	1-5	1x 24	20	7-9	1x 35.5
Anzeigen	BV EI 301 2539	0.5	1x 440	1-5	1x 24	20	7-9	1x 35.5
Anzeigen	BV EI 301 2674	0.5	1x 380	1-5	1x 12	42	7-9	1x 18
Anzeigen	BV EI 301 2732	0.5	1x 380	1-5	1x 10	50	7-9	1x 14.9

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 301 2114	0.5	1x 380	1-5	1x 24	20	7-9	1x 35.5
Anzeigen	BV EI 301 2539	0.5	1x 440	1-5	1x 24	20	7-9	1x 35.5
Anzeigen	BV EI 301 2674	0.5	1x 380	1-5	1x 12	42	7-9	1x 18
Anzeigen	BV EI 301 2732	0.5	1x 380	1-5	1x 10	50	7-9	1x 14.9

Zurück zu den Baugrößen

EI 302 ...

Baugröße/Pakethöhe	Leistung ta 40°C/F	Leistung ta 70°C/F	Bauhöhe (h)	Gewicht	Verpackungseinheit
BV EI 302 .../ 10,5 mm	1,8 VA	1,5 VA	21,8 mm	0,070 kg	50 Stück

SERIENTYPEN EI 302 ...

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 302 2020	1.5	1x 230	1-5	1x 6	250	7-9	1x 8.2
Anzeigen	BV EI 302 2021	1.5	1x 230	1-5	1x 9	166	7-9	1x 12.1
Anzeigen	BV EI 302 2022	1.5	1x 230	1-5	1x 12	125	7-9	1x 16.6
Anzeigen	BV EI 302 2023	1.5	1x 230	1-5	1x 15	100	7-9	1x 20.6
Anzeigen	BV EI 302 2024	1.5	1x 230	1-5	1x 18	83	7-9	1x 24.5
Anzeigen	BV EI 302 2025	1.5	1x 230	1-5	2x 6	125	6-7/9-10	2x 8.2
Anzeigen	BV EI 302 2026	1.5	1x 230	1-5	2x 9	83	6-7/9-10	2x 12.4
Anzeigen	BV EI 302 2027	1.5	1x 230	1-5	2x 12	62	6-7/9-10	2x 16.6
Anzeigen	BV EI 302 2028	1.5	1x 230	1-5	2x 15	50	6-7/9-10	2x 20.4
Anzeigen	BV EI 302 2029	1.5	1x 230	1-5	2x 18	41	6-7/9-10	2x 24.8
Anzeigen	BV EI 302 2989	1.5	1x 230	1-5	1x 24	62	7-9	1x 33.5

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 302 2000	1.8	1x 230	1-5	1x 6	300	7-9	1x 8.8
Anzeigen	BV EI 302 2001	1.8	1x 230	1-5	1x 9	200	7-9	1x 12.6
Anzeigen	BV EI 302 2002	1.8	1x 230	1-5	1x 12	150	7-9	1x 16.9
Anzeigen	BV EI 302 2003	1.8	1x 230	1-5	1x 15	120	7-9	1x 21.1
Anzeigen	BV EI 302 2004	1.8	1x 230	1-5	1x 18	100	7-9	1x 25.4
Anzeigen	BV EI 302 2005	1.8	1x 230	1-5	2x 6	150	6-7/9-10	2x 8.8
Anzeigen	BV EI 302 2006	1.8	1x 230	1-5	2x 9	100	6-7/9-10	2x 13
Anzeigen	BV EI 302 2007	1.8	1x 230	1-5	2x 12	75	6-7/9-10	2x 17.8
Anzeigen	BV EI 302 2008	1.8	1x 230	1-5	2x 15	60	6-7/9-10	2x 21.8
Anzeigen	BV EI 302 2009	1.8	1x 230	1-5	2x 18	50	6-7/9-10	2x 26.2
Anzeigen	BV EI 302 2990	1.8	1x 230	1-5	1x 24	75	7-9	1x 34.5
Anzeigen	BV EI 302 3021	1.8	1x 230	1-5	1x 7.5	240	7-9	1x 10.7
Anzeigen	BV EI 302 3022	1.8	1x 230	1-5	1x 21	86	7-9	1x 30.4

Zurück zu den Baugrößen

EI 307 ...

Baugröße/Pakethöhe	Leistung ta 40°C/F	Leistung ta 70°C/F	Bauhöhe (h)	Gewicht	Verpackungseinheit
BV EI 307 .../ 11,5 mm	2,2 VA	1,8 VA	22,1 mm	0,076 kg	50 Stück

SERIENTYPEN EI 307 ...

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
---	BV EI 307 3801	1.8	230	1-5	1x 12	150	7-9	1x 18.7
---	BV EI 307 3842	1.8	230	1-5	1x 6	300	7-9	1x 9.7
---	BV EI 307 3843	1.8	230	1-5	2x 6	2x 150	6-7/9-10	2x 9.4
---	BV EI 307 3844	1.8	230	1-5	1x 7.5	240	7-9	1x 12.7
---	BV EI 307 3845	1.8	230	1-5	2x 7.5	2x 120	6-7/9-10	2x 12.4
---	BV EI 307 3846	1.8	230	1-5	1x 9	200	7-9	1x 14.5
---	BV EI 307 3847	1.8	230	1-5	2x 9	2x 100	6-7/9-10	2x 14.3
---	BV EI 307 3848	1.8	230	1-5	2x 12	2x 75	6-7/9-10	2x 18.9
---	BV EI 307 3849	1.8	230	1-5	1x 15	120	7-9	1x 24.5

---	BV EI 307 3850	1.8	230	1-5	2x 15	2x 60	6-7/9-10	2x 24.5
---	BV EI 307 3851	1.8	230	1-5	1x 18	100	7-9	1x 28.4
---	BV EI 307 3852	1.8	230	1-5	1x 21	86	7-9	1x 33.4
---	BV EI 307 3853	1.8	230	1-5	1x 24	75	7-9	1x 37.9

Zurück zu den Baugrößen

EI 303 ...

Baugröße/Pakethöhe	Leistung ta 40°C/F	Leistung ta 70°C/F	Bauhöhe (h)	Gewicht	Verpackungseinheit
BV EI 303 .../ 12,5 mm	2,3 VA	1,9 VA	23,8 mm	0,081 kg	50 Stück

SERIENTYPEN EI 303 ...

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 303 2030	1.9	1x 230	1-5	1x 6	316	7-9	1x 8.6
Anzeigen	BV EI 303 2031	1.9	1x 230	1-5	1x 9	211	7-9	1x 12.9
Anzeigen	BV EI 303 2032	1.9	1x 230	1-5	1x 12	158	7-9	1x 17.2
Anzeigen	BV EI 303 2033	1.9	1x 230	1-5	1x 15	126	7-9	1x 21.5
Anzeigen	BV EI 303 2034	1.9	1x 230	1-5	1x 18	105	7-9	1x 25.8
Anzeigen	BV EI 303 2035	1.9	1x 230	1-5	2x 6	158	6-7/9-10	2x 8.8
Anzeigen	BV EI 303 2036	1.9	1x 230	1-5	2x 9	105	6-7/9-10	2x 13.2
Anzeigen	BV EI 303 2037	1.9	1x 230	1-5	2x 12	79	6-7/9-10	2x 17.7
Anzeigen	BV EI 303 2038	1.9	1x 230	1-5	2x 15	63	6-7/9-10	1x 21.9
Anzeigen	BV EI 303 2039	1.9	1x 230	1-5	2x 18	52	6-7/9-10	2x 26.5
Anzeigen	BV EI 303 2095	1.9	1x 230	1-5	2x 7.5	126	6-7/9-10	2x 11.7
Anzeigen	BV EI 303 2100	1.9	1x 230	1-5	1x 24	79	7-9	1x 35.5
Anzeigen	BV EI 303 2782	1.9	1x 230	1-5	2x 10	95	6-7/9-10	2x 15
Anzeigen	BV EI 303 3012	1.9	1x 230	1-5	1x 10	190	7-9	1x 14.5
Anzeigen	BV EI 303 3013	1.9	1x 230	1-5	1x 21	90	7-9	1x 30

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 303 2010	2.3	1x 230	1-5	1x 6	383	7-9	1x 8.5
Anzeigen	BV EI 303 2011	2.3	1x 230	1-5	1x 9	255	7-9	1x 12.9
Anzeigen	BV EI 303 2012	2.3	1x 230	1-5	1x 12	191	7-9	1x 17.4
Anzeigen	BV EI 303 2013	2.3	1x 230	1-5	1x 15	153	7-9	1x 21.6
Anzeigen	BV EI 303 2014	2.3	1x 230	1-5	1x 18	127	7-9	1x 25.8
Anzeigen	BV EI 303 2015	2.3	1x 230	1-5	2x 6	191	6-7/9-10	2x 9.4
Anzeigen	BV EI 303 2016	2.3	1x 230	1-5	2x 9	127	6-7/9-10	2x 14.1
Anzeigen	BV EI 303 2017	2.3	1x 230	1-5	2x 12	95	6-7/9-10	2x 18.8
Anzeigen	BV EI 303 2018	2.3	1x 230	1-5	2x 15	76	6-7/9-10	2x 23.4
Anzeigen	BV EI 303 2019	2.3	1x 230	1-5	2x 18	63	6-7/9-10	2x 28.1
Anzeigen	BV EI 303 2991	2.3	1x 230	1-5	1x 24	96	7-9	1x 33.7

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 303 2669	1.9	1x 110	1-5	1x 12	158	7-9	1x 17.2
Anzeigen	BV EI 303 2690	1.9	1x 115	1-5	2x 7.5	126	6-7/9-10	2x 11.7
Anzeigen	BV EI 303 2693	1.9	1x 24	1-5	1x 18	105	7-9	1x 25.8
Anzeigen	BV EI 303 2739	1.9	1x 127	1-5	1x 24	79	7-9	1x 35.5
Anzeigen	BV EI 303 2744	1.9	1x 110	1-5	1x 24	79	7-9	1x 35.5
Anzeigen	BV EI 303 2897	1.9	1x 115	1-5	1x 12	158	7-9	1x 17.2
Anzeigen	BV EI 303 2943	1.9	1x 115	1-5	1x 9	211	7-9	1x 12.9
Anzeigen	BV EI 303 2982	1.9	1x 110	1-5	1x 18	105	7-9	1x 25.8

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 303 2535	1.9	1x 400	1-5	2x 9	105	6-7/9-10	2x 13.2
Anzeigen	BV EI 303 2684	1.9	1x 240	1-5	2x 15	63	6-7/9-10	1x 21.9

Zurück zu den Baugrößen

EI 304...

Baugröße/Pakethöhe	Leistung ta 40°C/F	Leistung ta 70°C/F	Bauhöhe (h)	Gewicht	Verpackungseinheit
BV EI 304 .../ 15,5 mm	2,6 VA	2,1 VA	27,4 mm	0,099 kg	50 Stück

SERIENTYPEN EI 304 ...

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2080	2.1	1x 230	1-5	1x 6	350	7-9	1x 10.5

Anzeigen	BV EI 304 2081	2.1	1x 230	1-5	1x 9	210	7-9	1x 15.8
Anzeigen	BV EI 304 2082	2.1	1x 230	1-5	1x 12	175	7-9	1x 21.5
Anzeigen	BV EI 304 2083	2.1	1x 230	1-5	1x 15	140	7-9	1x 26.5
Anzeigen	BV EI 304 2084	2.1	1x 230	1-5	1x 18	117	7-9	1x 30
Anzeigen	BV EI 304 2085	2.1	1x 230	1-5	2x 6	175	6-7/9-10	2x 11.2
Anzeigen	BV EI 304 2086	2.1	1x 230	1-5	2x 9	117	6-7/9-10	2x 16
Anzeigen	BV EI 304 2087	2.1	1x 230	1-5	2x 12	88	6-7/9-10	2x 21.5
Anzeigen	BV EI 304 2088	2.1	1x 230	1-5	2x 15	70	6-7/9-10	2x 26.5
Anzeigen	BV EI 304 2089	2.1	1x 230	1-5	2x 18	58	6-7/9-10	2x 29.8
Anzeigen	BV EI 304 2751	2.1	1x 230	1-5	1x 10	210	7-9	1x 15.8
Anzeigen	BV EI 304 2773	2.1	1x 230	1-5	2x 7.5	140	6-7/9-10	2x 13.9
Anzeigen	BV EI 304 2843	2.1	1x 230	1-5	1x 21	100	7-9	1x 33.4
Anzeigen	BV EI 304 2868	2.1	1x 230	1-5	1x 24	88	7-9	1x 37.3
Anzeigen	BV EI 304 2889	2.1	1x 230	1-5	1x 7.5	280	7-9	1x 13.7
Anzeigen	BV EI 304 3014	2.1	1x 230	1-5	2x 10	105	6-7/9-10	2x 16

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2040	2.6	1x 230	1-5	1x 6	434	7-9	1x 10.4
Anzeigen	BV EI 304 2041	2.6	1x 230	1-5	1x 9	289	7-9	1x 15.9
Anzeigen	BV EI 304 2042	2.6	1x 230	1-5	1x 12	217	7-9	1x 21.7
Anzeigen	BV EI 304 2043	2.6	1x 230	1-5	1x 15	174	7-9	1x 27.4
Anzeigen	BV EI 304 2044	2.6	1x 230	1-5	1x 18	145	7-9	1x 30.9
Anzeigen	BV EI 304 2045	2.6	1x 230	1-5	2x 6	217	6-7/9-10	2x 10.4
Anzeigen	BV EI 304 2046	2.6	1x 230	1-5	2x 9	145	6-7/9-10	2x 16.2
Anzeigen	BV EI 304 2047	2.6	1x 230	1-5	2x 12	108	6-7/9-10	2x 22.4
Anzeigen	BV EI 304 2048	2.6	1x 230	1-5	2x 15	87	6-7/9-10	2x 26.4
Anzeigen	BV EI 304 2049	2.6	1x 230	1-5	2x 18	72	6-7/9-10	2x 30.4
Anzeigen	BV EI 304 2840	2.6	1x 230	1-5	2x 7.5	173	6-7/9-10	2x 12.5
Anzeigen	BV EI 304 2941	2.6	1x 230	1-5	1x 10	260	7-9	1x 14.3
Anzeigen	BV EI 304 2992	2.6	1x 230	1-5	1x 24	108	7-9	1x 41.7
Anzeigen	BV EI 304 2995	2.6	1x 230	1-5	1x 21	123	7-9	1x 32.1

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2366	2.1	1x 42	1-5	2x 12	88	6-7/9-10	2x 21.5
Anzeigen	BV EI 304 2476	2.1	1x 24	1-5	2x 18	58	6-7/9-10	2x 29.8
Anzeigen	BV EI 304 2498	2.1	1x 24	1-5	2x 15	70	6-7/9-10	2x 26.5
Anzeigen	BV EI 304 2689	2.1	1x 42	1-5	1x 18	117	7-9	1x 30
Anzeigen	BV EI 304 2712	2.1	1x 42	1-5	1x 24	88	7-9	1x 37.3
Anzeigen	BV EI 304 2952	2.1	1x 24	1-5	1x 18	117	7-9	1x 30

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2281	2.1	1x 110	1-5	1x 10	210	7-9	1x 17.4
Anzeigen	BV EI 304 2301	2.1	1x 115	1-5	1x 21	100	7-9	1x 33.4
Anzeigen	BV EI 304 2362	2.1	1x 110	1-5	1x 12	175	7-9	1x 21.5
Anzeigen	BV EI 304 2367	2.1	1x 110	1-5	2x 12	88	6-7/9-10	2x 21.5
Anzeigen	BV EI 304 2423	2.1	1x 110	1-5	2x 15	70	6-7/9-10	2x 26.5
Anzeigen	BV EI 304 2524	2.1	1x 110	1-5	1x 9	234	7-9	1x 16
Anzeigen	BV EI 304 2718	2.1	1x 110	1-5	1x 18	117	7-9	1x 30
Anzeigen	BV EI 304 2803	2.1	1x 115	1-5	1x 10	210	7-9	1x 17.4
Anzeigen	BV EI 304 2818	2.1	1x 115	1-5	1x 15	140	7-9	1x 26.5
Anzeigen	BV EI 304 2820	2.1	1x 110	1-5	1x 15	140	7-9	1x 26.5
Anzeigen	BV EI 304 2825	2.1	1x 110	1-5	2x 18	58	6-7/9-10	2x 29.8

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2345	2.1	1x 240	1-5	1x 21	100	7-9	1x 33.4
Anzeigen	BV EI 304 2424	2.1	1x 240	1-5	2x 15	70	6-7/9-10	2x 26.5
Anzeigen	BV EI 304 2490	2.1	1x 240	1-5	1x 10	210	7-9	1x 15.8
Anzeigen	BV EI 304 2556	2.1	1x 240	1-5	2x 18	58	6-7/9-10	2x 29.8
Anzeigen	BV EI 304 2711	2.1	1x 400	1-5	2x 18	58	6-7/9-10	2x 29.8
Anzeigen	BV EI 304 2735	2.1	1x 400	1-5	1x 21	100	7-9	1x 33.4

Anzeigen	BV EI 304 2797	2.1	1x 240	1-5	1x 24	88	7-9	1x 37.3
Anzeigen	BV EI 304 2862	2.1	1x 240	1-5	1x 18	117	7-9	1x 30
Anzeigen	BV EI 304 2899	2.1	1x 240	1-5	1x 12	175	7-9	1x 21.5
Anzeigen	BV EI 304 3015	2.1	1x 400	1-5	1x 12	175	7-9	1x 21.5

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2430	2.6	1x 110	1-5	1x 12	217	7-9	1x 21.7
Anzeigen	BV EI 304 2790	2.6	1x 110	1-5	1x 9	289	7-9	1x 15.9
Anzeigen	BV EI 304 2819	2.6	1x 110	1-5	1x 18	145	7-9	1x 30.9
Anzeigen	BV EI 304 2835	2.6	1x 110	1-5	2x 6	217	6-7/9-10	2x 10.4
Anzeigen	BV EI 304 2951	2.6	1x 24	1-5	1x 9	289	7-9	1x 15.9

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 304 2443	2.6	1x 400	1-5	1x 24	108	7-9	1x 41.7
Anzeigen	BV EI 304 2798	2.6	1x 240	1-5	2x 7.5	173	6-7/9-10	2x 12.5

zurück zu den Baugrößen

EI 305...

Baugröße/Pakethöhe	Leistung ta 40°C/F	Leistung ta 70°C/F	Bauhöhe (h)	Gewicht	Verpackungseinheit	
BV EI 305	18,0 mm	3,0 VA	2,3 VA	29,8 mm	0,111 kg	50 Stück

SERIENTYPEN EI 305 ...

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2772	2.3	1x 230	1-5	1x 21	110	7-9	1x 38.4
Anzeigen	BV EI 305 2800	2.3	1x 230	1-5	1x 12	192	7-9	1x 21.4
Anzeigen	BV EI 305 2802	2.3	1x 230	1-5	1x 10	230	7-9	1x 18.6
Anzeigen	BV EI 305 2805	2.3	1x 230	1-5	1x 15	153	7-9	1x 28.2
Anzeigen	BV EI 305 2844	2.3	1x 230	1-5	2x 15	76	6-7/9-10	2x 24.1
Anzeigen	BV EI 305 2847	2.3	1x 230	1-5	2x 12	96	6-7/9-10	2x 21.8
Anzeigen	BV EI 305 2851	2.3	1x 230	1-5	1x 18	128	7-9	1x 32.4
Anzeigen	BV EI 305 2866	2.3	1x 230	1-5	2x 9	127	6-7/9-10	1x 17.1
Anzeigen	BV EI 305 2874	2.3	1x 230	1-5	1x 24	96	7-9	1x 43.5
Anzeigen	BV EI 305 2878	2.3	1x 230	1-5	1x 6	383	7-9	1x 11.6
Anzeigen	BV EI 305 2879	2.3	1x 230	1-5	1x 9	255	7-9	1x 17.6
Anzeigen	BV EI 305 2882	2.3	1x 230	1-5	2x 6	192	6-7/9-10	2x 11.1
Anzeigen	BV EI 305 2893	2.3	1x 230	1-5	1x 7.5	305	7-9	1x 15.2
Anzeigen	BV EI 305 2894	2.3	1x 230	1-5	2x 7.5	153	6-7/9-10	2x 13.8
Anzeigen	BV EI 305 2895	2.3	1x 230	1-5	2x 18	64	6-7/9-10	2x 32.3

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2050	3	1x 230	1-5	1x 6	500	7-9	1x 10.7
Anzeigen	BV EI 305 2051	3	1x 230	1-5	1x 9	334	7-9	1x 17.3
Anzeigen	BV EI 305 2052	3	1x 230	1-5	1x 12	250	7-9	1x 20.4
Anzeigen	BV EI 305 2053	3	1x 230	1-5	1x 15	200	7-9	1x 26.7
Anzeigen	BV EI 305 2054	3	1x 230	1-5	1x 18	167	7-9	1x 32.5
Anzeigen	BV EI 305 2055	3	1x 230	1-5	2x 6	250	6-7/9-10	2x 10.7
Anzeigen	BV EI 305 2056	3	1x 230	1-5	2x 9	167	6-7/9-10	2x 15.9
Anzeigen	BV EI 305 2057	3	1x 230	1-5	2x 12	125	6-7/9-10	2x 20.9
Anzeigen	BV EI 305 2058	3	1x 230	1-5	2x 15	100	6-7/9-10	2x 28
Anzeigen	BV EI 305 2059	3	1x 230	1-5	2x 18	83	6-7/9-10	2x 30.7
Anzeigen	BV EI 305 2188	3	1x 230	1-5	1x 21	143	7-9	1x 35.7
Anzeigen	BV EI 305 2836	3	1x 230	1-5	1x 8	375	7-9	1x 15.4
Anzeigen	BV EI 305 2922	3	1x 230	1-5	2x 7.5	200	6-7/9-10	2x 13.7
Anzeigen	BV EI 305 2940	3	1x 230	1-5	1x 10	300	7-9	1x 16.9
Anzeigen	BV EI 305 2993	3	1x 230	1-5	1x 24	125	7-9	1x 42

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2307	2.3	1x 24	1-5	1x 15	153	7-9	1x 28.2
Anzeigen	BV EI 305 2310	2.3	1x 24	1-5	1x 24	96	7-9	1x 43.5
Anzeigen	BV EI 305 2555	2.3	1x 42	1-5	1x 24	96	7-9	1x 43.5
Anzeigen	BV EI 305 2736	2.3	1x 24	1-5	1x 12	192	7-9	1x 21.4

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2102	2.3	1x 115	1-5	1x 24	96	7-9	1x 43.5
Anzeigen	BV EI 305 2308	2.3	1x 110	1-5	1x 15	153	7-9	1x 28.2
Anzeigen	BV EI 305 2311	2.3	1x 110	1-5	1x 24	96	7-9	1x 43.5
Anzeigen	BV EI 305 2471	2.3	1x 127	1-5	1x 18	128	7-9	1x 32.4
Anzeigen	BV EI 305 2494	2.3	1x 110	1-5	2x 12	96	6-7/9-10	2x 21.8
Anzeigen	BV EI 305 2544	2.3	1x 110	1-5	1x 9	255	7-9	1x 17.6
Anzeigen	BV EI 305 2671	2.3	1x 110	1-5	1x 18	128	7-9	1x 32.4
Anzeigen	BV EI 305 2682	2.3	1x 110	1-5	2x 7.5	153	6-7/9-10	2x 13.8
Anzeigen	BV EI 305 2710	2.3	1x 110	1-5	1x 12	192	7-9	1x 21.4
Anzeigen	BV EI 305 2738	2.3	1x 100	1-5	1x 15	153	7-9	1x 28.2
Anzeigen	BV EI 305 2884	2.3	1x 110	1-5	1x 10	230	7-9	1x 18.6

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2100	2.3	1x 500	1-5	1x 18	128	7-9	1x 32.4
Anzeigen	BV EI 305 2309	2.3	1x 240	1-5	1x 15	153	7-9	1x 28.2
Anzeigen	BV EI 305 2312	2.3	1x 240	1-5	1x 24	96	7-9	1x 43.5
Anzeigen	BV EI 305 2324	2.3	1x 240	1-5	1x 18	128	7-9	1x 32.4
Anzeigen	BV EI 305 2672	2.3	1x 240	1-5	1x 12	192	7-9	1x 21.4
Anzeigen	BV EI 305 2814	2.3	1x 380	1-5	1x 18	128	7-9	1x 32.4

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2280	3	1x 110	1-5	1x 15	200	7-9	1x 26.7
Anzeigen	BV EI 305 2518	3	1x 110	1-5	1x 10	300	7-9	1x 16.9
Anzeigen	BV EI 305 2527	3	1x 110	1-5	2x 15	100	6-7/9-10	2x 28
Anzeigen	BV EI 305 2678	3	1x 110	1-5	2x 7.5	200	6-7/9-10	2x 13.7
Anzeigen	BV EI 305 2715	3	1x 110	1-5	1x 6	500	7-9	1x 10.7
Anzeigen	BV EI 305 2745	3	1x 110	1-5	1x 18	167	7-9	1x 32.5
Anzeigen	BV EI 305 2749	3	1x 110	1-5	1x 8	375	7-9	1x 15.4
Anzeigen	BV EI 305 2753	3	1x 24	1-5	1x 18	167	7-9	1x 32.5
Anzeigen	BV EI 305 2961	3	1x 115	1-5	1x 9	334	7-9	1x 17.3
Anzeigen	BV EI 305 2965	3	1x 110	1-5	1x 12	250	7-9	1x 20.4

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2554	3	1x 240	1-5	1x 12	250	7-9	1x 20.4
Anzeigen	BV EI 305 2695	3	1x 240	1-5	1x 8	375	7-9	1x 15.4
Anzeigen	BV EI 305 2752	3	1x 240	1-5	1x 15	200	7-9	1x 26.7
Anzeigen	BV EI 305 2755	3	1x 240	1-5	1x 10	300	7-9	1x 16.9

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 305 2099	3	1x 400	1-5	2x 12	125	6-7/9-10	2x 20.9
Anzeigen	BV EI 305 2663	3	1x 400	1-5	1x 12	250	7-9	1x 20.4
Anzeigen	BV EI 305 2665	3	1x 400	1-5	1x 24	125	7-9	1x 42
Anzeigen	BV EI 305 2743	3	1x 440	1-5	2x 12	125	6-7/9-10	2x 20.9

Zurück zu den Baugrößen

EI 306...

Baugröße/Pakethöhe	Leistung ta 40°C/F	Leistung ta 70°C//F	Bauhöhe (h)	Gewicht	Verpackungseinheit
BV EI 306 .../ 23,0 mm	2,6 - 3,6 VA	2,5 - 3,4 VA	34,0 mm	0,135 kg	50 Stück

SERIENTYPEN EI 306 ...

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 306 2023	2.6	1x 230	1-5	1x 24	108	7-9	1x 46.8
Anzeigen	BV EI 306 2060	2.6	1x 230	1-5	1x 6	434	7-9	1x 11.7
Anzeigen	BV EI 306 2061	2.6	1x 230	1-5	1x 9	289	7-9	1x 17.1
Anzeigen	BV EI 306 2062	2.6	1x 230	1-5	1x 12	217	7-9	1x 22.9
Anzeigen	BV EI 306 2063	2.6	1x 230	1-5	1x 15	173	7-9	1x 26.5
Anzeigen	BV EI 306 2064	2.6	1x 230	1-5	1x 18	144	7-9	1x 34.8
Anzeigen	BV EI 306 2065	2.6	1x 230	1-5	2x 6	217	6-7/9-10	2x 11.9
Anzeigen	BV EI 306 2066	2.6	1x 230	1-5	2x 9	145	6-7/9-10	2x 17.7

Anzeigen	BV EI 306 2067	2.6	1x 230	1-5	2x 12	108	6-7/9-10	2x 23.4
Anzeigen	BV EI 306 2068	2.6	1x 230	1-5	2x 15	87	6-7/9-10	1x 26.9
Anzeigen	BV EI 306 2069	2.6	1x 230	1-5	2x 18	72	6-7/9-10	2x 31
Anzeigen	BV EI 306 2103	2.6	1x 230	1-5	1x 7.5	346	7-9	1x 13.9
Anzeigen	BV EI 306 3001	2.6	1x 230	1-5	2x 7.5	173	6-7/9-10	2x 14.4
Anzeigen	BV EI 306 3024	2.6	1x 230	1-5	1x 21	123	7-9	1x 37

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 306 3359	3.0	1x 230	1-5	1x 6	500	7-9	1x 10.5
Anzeigen	BV EI 306 3360	3.0	1x 230	1-5	2x 6	250	6-7/9-10	2x 10.5
Anzeigen	BV EI 306 3361	3.0	1x 230	1-5	1x 7,5	400	7-9	1x 12,7
---	BV EI 306 3362	3.0	1x 230	1-5	2x 7,5	200	6-7/9-10	2x 12,7
Anzeigen	BV EI 306 3363	3.0	1x 230	1-5	1x 9	333	7-9	1x 15.9
Anzeigen	BV EI 306 3364	3.0	1x 230	1-5	2x 9	167	6-7/9-10	2x 15.9
Anzeigen	BV EI 306 3365	3.0	1x 230	1-5	1x 12	250	7-9	1x 20.3
Anzeigen	BV EI 306 3366	3.0	1x 230	1-5	2x 12	125	6-7/9-10	2x 20.3
Anzeigen	BV EI 306 3367	3.0	1x 230	1-5	1x 15	200	7-9	1x 23.8
Anzeigen	BV EI 306 3368	3.0	1x 230	1-5	2x 15	100	6-7/9-10	2x 23.8
Anzeigen	BV EI 306 3369	3.0	1x 230	1-5	1x 18	167	7-9	1x 29.2
Anzeigen	BV EI 306 3371	3.0	1x 230	1-5	1x 21	143	7-9	1x 34.3
Anzeigen	BV EI 306 3372	3.0	1x 230	1-5	1x 24	125	7-9	1x 38.4

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 306 2070	3.2	1x 230	1-5	1x 6	534	7-9	1x 10.9
Anzeigen	BV EI 306 2071	3.2	1x 230	1-5	1x 9	356	7-9	1x 16.3
Anzeigen	BV EI 306 2072	3.2	1x 230	1-5	1x 12	267	7-9	1x 22.6
Anzeigen	BV EI 306 2073	3.2	1x 230	1-5	1x 15	213	7-9	1x 26.7
Anzeigen	BV EI 306 2074	3.2	1x 230	1-5	1x 18	178	7-9	1x 31.7
Anzeigen	BV EI 306 2075	3.2	1x 230	1-5	2x 6	265	6-7/9-10	2x 11.5
Anzeigen	BV EI 306 2076	3.2	1x 230	1-5	2x 9	178	6-7/9-10	2x 17.2
Anzeigen	BV EI 306 2077	3.2	1x 230	1-5	2x 12	133	6-7/9-10	2x 22.6
Anzeigen	BV EI 306 2078	3.2	1x 230	1-5	2x 15	107	6-7/9-10	2x 25
Anzeigen	BV EI 306 2079	3.2	1x 230	1-5	2x 18	89	6-7/9-10	2x 30.4
Anzeigen	BV EI 306 2994	3.2	1x 230	1-5	1x 24	133	7-9	1x 44.5
Anzeigen	BV EI 306 3025	3.2	1x 230	1-5	1x 7.5	427	7-9	1x 14
Anzeigen	BV EI 306 3026	3.2	1x 230	1-5	1x 21	152	7-9	1x 40.5

Zurück zu den Baugrößen

Datenblatt	Bestellnummer	Leistung VA	Spannung prim. V	Anschlussstifte prim.	Spannung sek. V	Strom sek. mA	Anschlussstifte sek.	
Anzeigen	BV EI 306 3595	3.6	1x 230	1-5	1x 6	600	7-9	1x 10.8
Show	BV EI 306 3596	3.6	1x 230	1-5	2x 6	300	6-7 / 9-10	2x 10.8
Show	BV EI 306 3597	3.6	1x 230	1-5	1x 7.5	480	7-9	1x 13.3
Show	BV EI 306 3598	3.6	1x 230	1-5	2x 7.5	240	6-7 / 9-10	2x 13.3
Show	BV EI 306 3599	3.6	1x 230	1-5	1x 9	400	7-9	1x 15.7
Show	BV EI 306 3600	3.6	1x 230	1-5	2x 9	200	6-7 / 9-10	2x 15.7
Show	BV EI 306 3601	3.6	1x 230	1-5	1x 12	300	7-9	1x 21.0
Show	BV EI 306 3602	3.6	1x 230	1-5	2x 12	150	6-7 / 9-10	2x 21.0
Show	BV EI 306 3603	3.6	1x 230	1-5	1x 15	240	7-9	1x 24.5
Show	BV EI 306 3604	3.6	1x 230	1-5	2x 15	120	6-7 / 9-10	2x 24.5
Show	BV EI 306 3605	3.6	1x 230	1-5	1x 18	200	7-9	1x 31.4
Show	BV EI 306 3606	3.6	1x 230	1-5	1x 21	171	7-9	1x 35.5
Show	BV EI 306 3607	3.6	1x 230	1-5	1x 24	150	7-9	1x 42.0

Back to the sizes

We also supply other dimensions and performance data.
Ask us, we will be happy to fulfill your special wishes!

