

PVC Stranded Hook-Up Wires / PVC Leads

G1247 = Product group; Product group discount G 12 4_

XBK PVC Stranded Hook-Up Wires

Cross-Section: 2,5mm², 4mm², 6mm²

Colour: Black
Series: H07VK

Features

- Harmonized PVC stranded hook-up wires
- For internal wiring of devices
- Being used to wire lighting, tubes, surfaces and concealed installations for signal systems

Construction

- Stranded copper wire conductor according to VDE 0295 class 5
- Insulated with PVC TI 1 according to HD 21.1 S3
- Conductor identification meets VDE 0293

Technical Specifications

Outer Diameter	
2,5mm ² :	3,64mm
4mm ² :	4,15mm
6mm ² :	4,75mm
Rated Voltage, U ₀ /U:	450V/700V
Test Voltage:	2500V
Conductor Cross-Section:	2,5/4/6mm ²
Conductor Composition	
2,5mm ² :	51x0,235mm
4mm ² :	54x0,30mm
6mm ² :	79x0,30mm
Minimum Bend Radius:	4 x Diameter
Temperature Range	
Fixed Installation:	-40...+70°C
At Installation:	+5...+70°C


Terms of Delivery

- Minimum order quantity:
2,5mm²: 1 PKU = 100m in dispenser box
4/6mm²: 1 PKU = 100m ring

Manufacturer: **XBK-KABEL**

<http://www.xbk-kabel.de>

Part Nr.	Part description
H07VK250SW	Wire H07V-K 2,5mm ² Black
H07VK400SW	Wire H07V-K 4,0mm ² Black
H07VK600SW	Wire H07V-K 6,0mm ² black

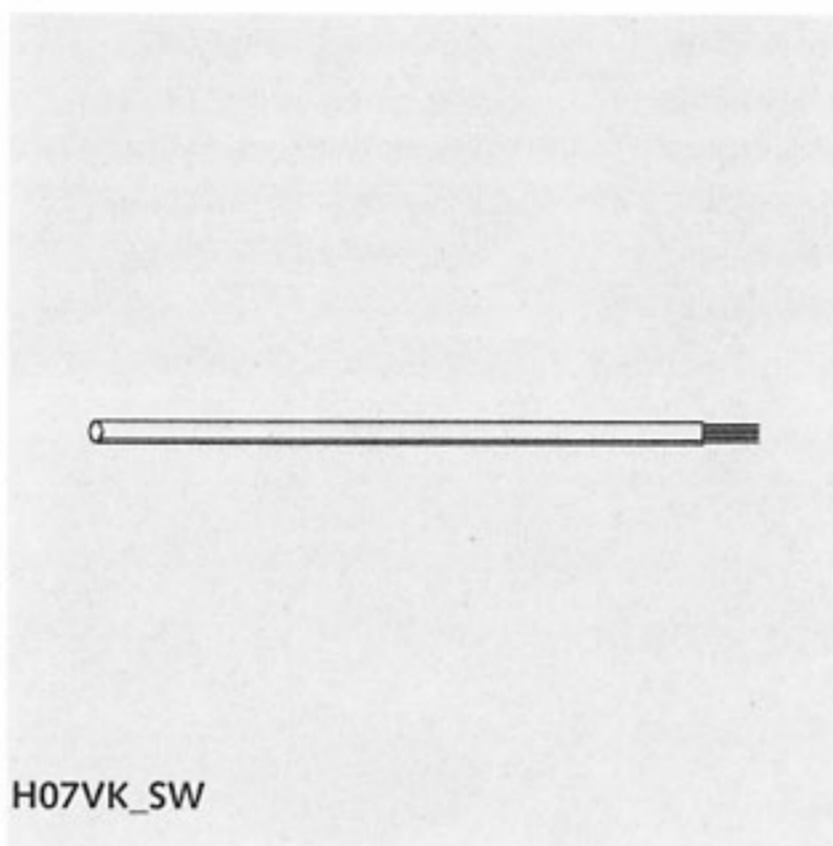

G1261 = Product group; Product group discount G 12 6_

PVC Leads

Highly Flexible for Test Leads

Cross-Section: 1,0mm²

Colours: Various
Series: PVC101

Features

- Test leads manufactured from highly flexible copper strands with double PVC insulation

Technical Specifications

Conductor Cross Section:	1,0mm ²
Conductor Composition:	259x0,07mm ²
Outer Diameter:	3,8mm

Terms of Delivery

Minimum order quantity: 1 PKU = 100m ring

Manufacturer: Various

Part Nr.	Part description
PVC101BL	PVC Lead 1,0mm ² 100m Ring Blue
PVC101GE	PVC Lead 1,0mm ² 100m Ring Yellow
PVC101GN	PVC Lead 1,0mm ² 100m Ring Green
PVC101RT	PVC Lead 1,0mm ² 100m Ring Red
PVC101SW	PVC Lead 1,0mm ² 100m Ring Black
PVC101GN/GE	PVC Lead 1,0mm ² 100m Ring Green/Yellow

