

# **LOCK SWITCH**

LS120

LS121

## **LS120 LS121 LOCK SWITCH**

## **ELECTRICAL & MECHANICAL SPECIFICATION**

Switch Rating: 1A @ 240V ac 2A @

125V ac

Note - Not mains isolating

Proof Voltage 1000V ac (Initial)

Life >10.000

**Operating Temperature**: -20°C to +65°C

Insulation Resistance:  $>500M\Omega$  @ 500V dc (Initial)

Contact Resistance:  $>10m\Omega$  (Initial)

## **FEATURES**

Front panel mount

Single pole single throw LS120 Double pole single throw LS121

Radial cylinder with 7 pin tumblers


Bright chrome plated zinc alloy die

cast housing Tapered lock head

Key inserted / removed in both positions

90° indexing

Same key only

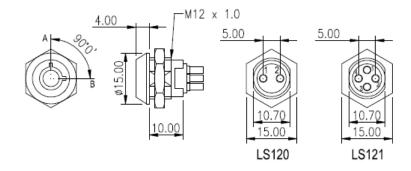

#### **ORDERING CODE**

ORDERING CODE	TERMINALS	KEY FREE	KEY TRAVEL	CONTACT POSITION
LS120A	2	2	90°	1 OFF 2 1 ON 2
LS120B	2	2	90°	1ON2 1OFF2
LS121	4	2	90°	1_OFF_3 2_OFF_4

#### **PANEL PIERCING DETAILS**

