





PIN HEADERS

Pin header

Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Copper Alloy
Plating:	Gold
Rated current:	3 Amp.
Rated voltage:	150 V _{RMS} /V _{DC}
Withstand voltage:	500 V _{RMS} for one minute
Operating temperature:	-40°C to +105°C
Max. soldering temp.:	260°C for 10 seconds

pitch	rows	row distance	orientation	termination
2,54	2	2,54	right angled	through hole

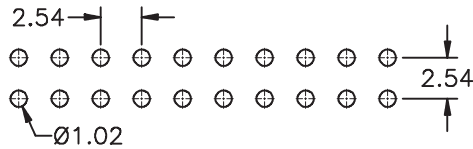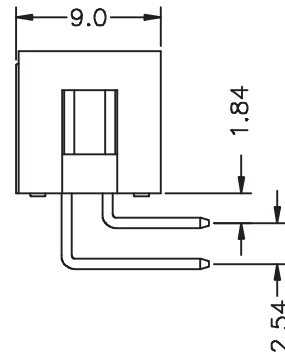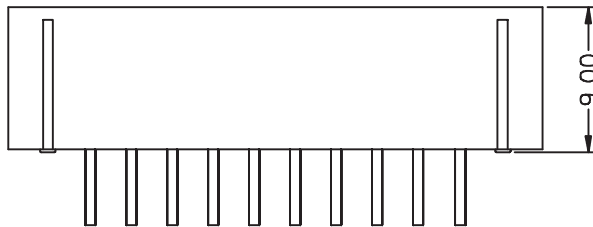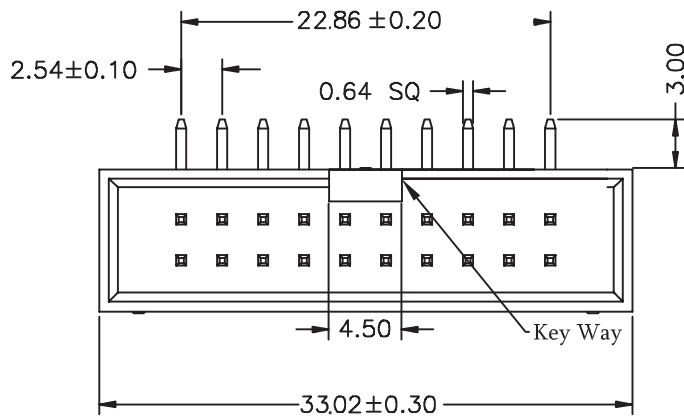

Recommended
P.C.B Hole Layout

Plating: 020

Plating: F = Au

Order code:

093-2-020-0-F-BS0A15

CS060513_V1_2