



Revised By	Date	Rev.
G. CHEN	FEB.04.2013	01

Revision History	Date	Rev.
Correct The PIN Assignment	FEB.04.2013	01

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

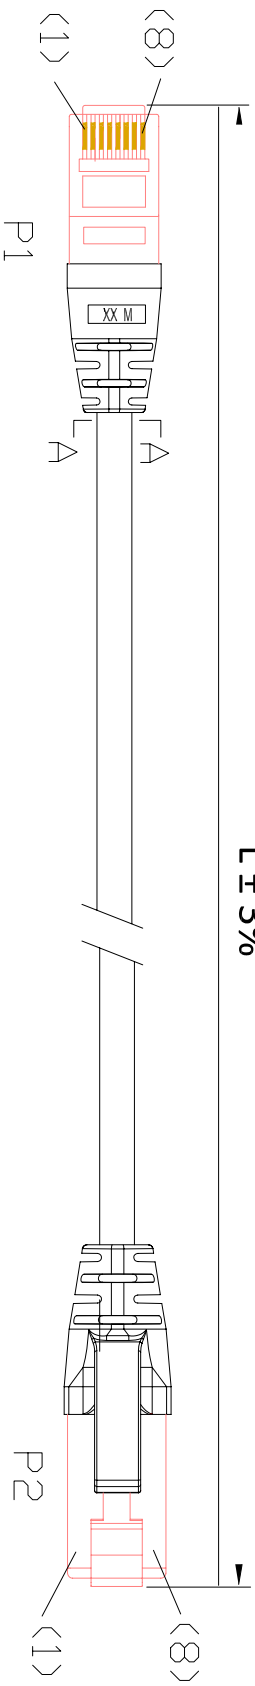


Printing: DIGITUS CAT6 S-FTP PATCH CABLE LSOH ISO/IEC 11801 ED.2
EN 50288 NSI/TIA-568C.2 IEC 60332-1 WWW.DIGITUS.INFO

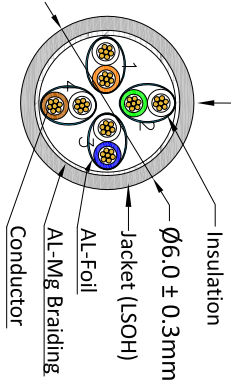



PIN	OUT	WIRE COLOR
1	2	ORANGE / WHITE
2	1	ORANGE
3	3	GREEN / WHITE
4	6	GREEN
5	4	BLUE
6	5	BLUE / WHITE
7	7	BROWN / WHITE
8	8	BROWN

DESCRIPTIONS:

- CABLE: CAT 6 S-FTP STRANDED WIRES AWG27
- WIRES: AWG27 (7/0.135±0.015MM) x 4 TWISTED PAIRS
- PLUG: RJ45 8P8C 3U" GOLD-PLATED ON CONTACT AREA TRANSPARENT- RED COLOR PC 94V-2
- MOLDING: LSOH, MOLDING COLOR IS SAME WITH THE CABLE JACKET COLOR
- CABLE JACKET: LSOH , OD: 6.0 ± 0.3 MM
- WIRES CONNECTION BASE ON TIA/EIA 568B
- TEST STANDARD ACC TO ISO/IEC 11801 CAT.6 CLASS E CHANNEL LINK
- PACKING: INDIVIDUALLY PACKED IN DIGITUS POLYBAG WITH STICKER
- Available Cable length: 0.25/0.5/1/1.5/2/2.5/3/5/7/7.5/10/15/20/25/30 METERS
- Available Cable Color:
 - BLUE RAL 5017, BLACK RAL 9005, GREEN RAL 6016, RED RAL 3020, GREY RAL 7044
 - WHITE RAL 9003, YELLOW RAL 1018, ORANGE RAL 2008, BROWN RAL 8008, VIOLET RAL 4008
- Dielectric Strength: 2.5kv 2 seconds
- Working Temperature: -20°C to 60°C

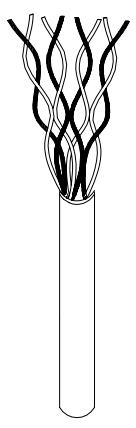

DK-1644-XXX/XX
FOR CABLE LENGTH
FOR CABLE COLOR

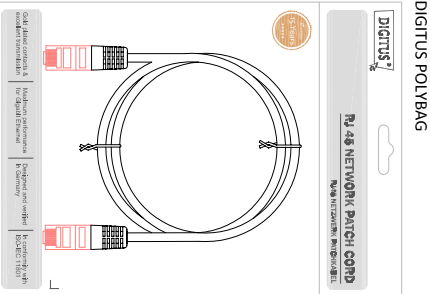

Date	Part No.
Drawn By	DK-1644-XXX/XX
Checked By	
Approved By	

Date	Name
JAN.30.2013	G.Chen
Title:	DIGITUS Network Patchcord Cat.6 S-FTP AWG27 LSOH
Scale	N/A
Unit	MM
Sheet	1/1

STR80211