

5500 Lit Rocker Switches - Single Pole 16A 250Vac



- ▶ Standard rocker switch
- ▶ Illuminated
- ▶ Choice of switching circuits
- ▶ Choice of bezel styles
- ▶ Choice of panel cut outs
- ▶ Matching indicator
- ▶ Single pole
- ▶ Splash resistant option
- ▶ Panel cut out 'A' style: 27.3 x 12.3mm



16(4)A 250Vac T85
10(3)A 250Vac T100, (12A 250Vac T125 for P rocker only)



UL CSA 15A 250Vac, CSA 16A Non Ind 250Vac
UL CSA 250Vac 1hp, 125Vac 1/2hp
UL 85°C, file E45221, CSA file LR10990

In house test

Inrush 24A to EN61058-1



RoHS compliant

μ contact gap.
Technical data on pages 4 & 5 (switches), 6 (indicators).
For Twin units repeat the order details for both the left and right sides.

C 5503 A L ---

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

▶ TERMINAL	▶ FUNCTION	▶ ROCKER
C 6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 3 5500 μ ON - OFF 	A Softline (Matt only) Lit
H 4.8 x 0.8	 5503 μ preferred option ON - OFF Lit Switched neutral 	P Lit window (Matt only) Lit
T Solder	 5508 μ for special applications ON - OFF Lit Unswitched neutral 	



C5503AL ---



C5500AL ---



C5503PL ---



C5503A/C5430AL









C5503A/C5503AL



C5503P/C5503PL

BODY

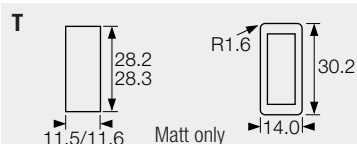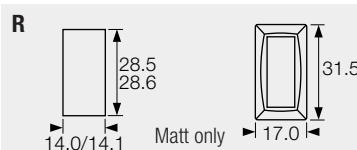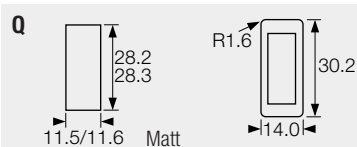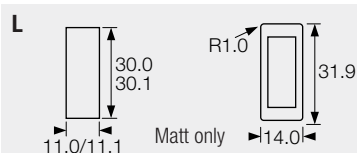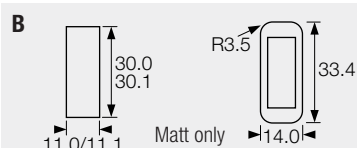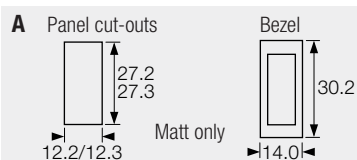

Cut-outs must be punched in the direction of insertion

OPTIONS

Finish Matt is standard.

Colour Call factory for custom colours. A full range is available for large orders.

Legend printing Select from the examples or call factory for custom legends.

Lamp voltage Call factory for details.

Blanking plate A0434 -- (SP) A0494 -- (DP)
Dummy units to fill unused panel holes.


Protective cover (designed to IP65)
Snaps on to A, L, Q or T bodies (add G after body in cat no.), this reduces maximum acceptable panel thickness to 1.2mm.



Panel sealing washers W46 (Single Pole) and W42 (Double Pole) are available for these body types, this reduces maximum acceptable panel thickness to 2mm.

For all options call the factory.

DIMENSIONS (mm)




Terminal spacing - Poles 10.8 between centres (twin units)

Panel thickness

A,Q	0.75 to 3.3mm
L,B,T	0.75 to 2.5mm
R	0.75 to 3.0mm


Twin units

Two single switches or a switch and an indicator light can be assembled side by side in one double pole body. For 5500 range panel cut-out details (L, B and T) call sales.

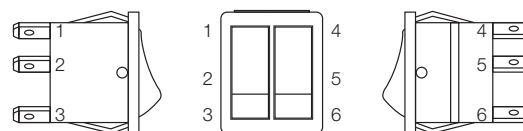

For twin units the first set of order format details refer to the left hand unit, when looking at the front of the assembly. (This has terminal numbers 1, 2 & 3)

Examples of printing



EN3036



EN3064



EN706