

High-Quality Pin Headers / Pin Headers

F2313 = Product group; Product group discount F 23 1_

MPE GARRY High-Quality Pin Headers

Single Row, Straight
Pitch: 2,54mm
Series: ASL

Features

- Tin-plated, part gold-plated or gold-plated design

Technical Specifications

Insulation Shell:	Thermoplastic, UL94V-0
Contact Material (DIN17660):	Copper alloy
Contact Surface	
ASL050Z:	Tinned
ASL050TG:	Part Gold-plated
ASL050G:	Gold-plated
Insulation Resistance, Max.:	40mΩ
Rated Current:	3A
Rated Voltage:	250V AC
Insulation Resistance, Min.:	500MΩ
Temperature Range:	-40...+105°C
Short Term (10s):	+260°C
Solderability:	IEC 68-2-20 Tb

Dimensions


Pin Length (A):	12,6mm
Pin Length Plug-in Area (B):	6,8mm
Pin Length Solder Area (C):	3,3mm
Pin Cross Section:	0,635x0,635mm

Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: 
<http://www.mpegarry.de>

Part Nr.	Part description
ASL050Z	Pin Header 50-Pole Straight 1R Sn
ASL050TG	Pin Header 50-Pole Straight 1R Sn/Au
ASL050G	Pin Header 50-Pole Straight 1R Au

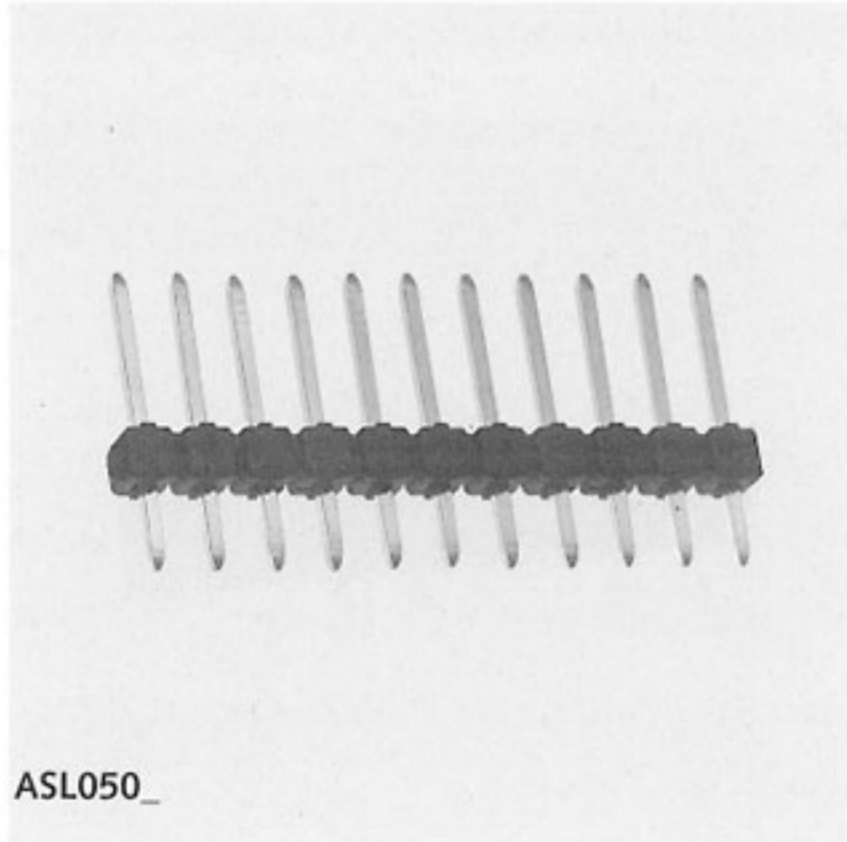

ASL050_

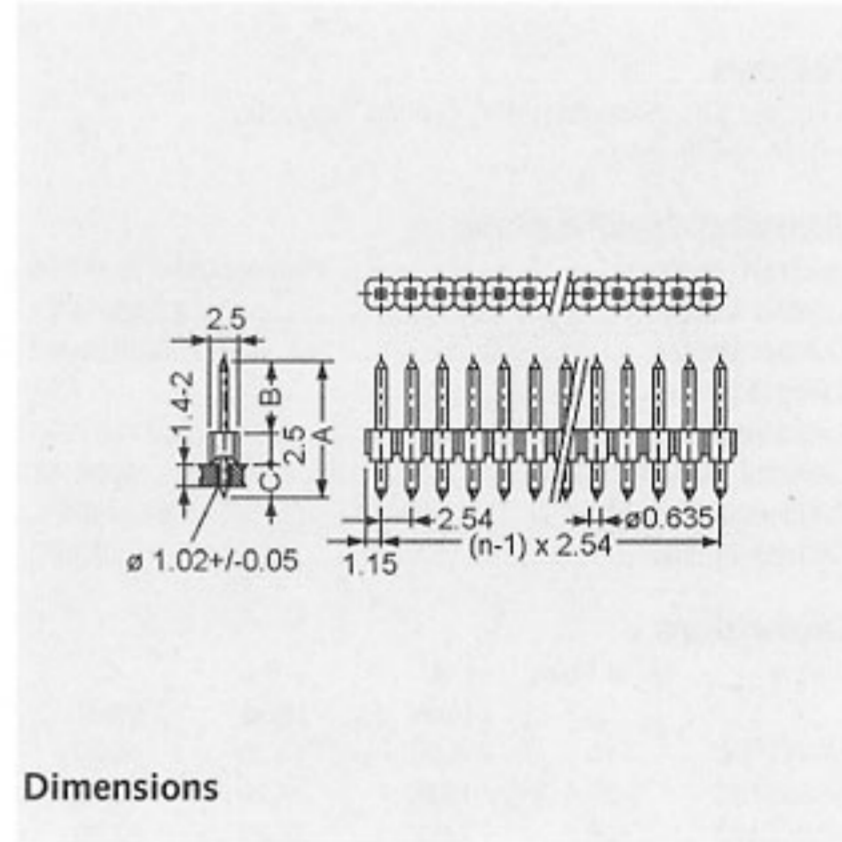

Dimensions

F2315 = Product group; Product group discount F 23 1_

Pin Headers

Single Row, Straight
Pitch: 2,54mm
Series: WSL

Features

- Tin-plated version
- Arbitrary mounting

Technical Specifications

Insulation Shell:	Polyamide, UL94V-0
Contact Material:	Brass
Contact Surface:	Tin
Rated Current:	1A
Temperature Range:	-55...+105°C
Dielectric Strength (1 Min.):	1000V AC
Insulation Resistance (500V DC):	1000MΩ

Dimensions


A:	2,54mm x Number of Contact Pins
B:	2,54mm x (Number of Contact Pins - 1)
Pin Cross Section, Max.:	0,64x0,64mm

Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Various

Part Nr.	Part description
WSL036Z	Pin Header 36-Pole Straight 1R Sn
WSL040Z	Pin Header 40-Pole Straight 1R Sn

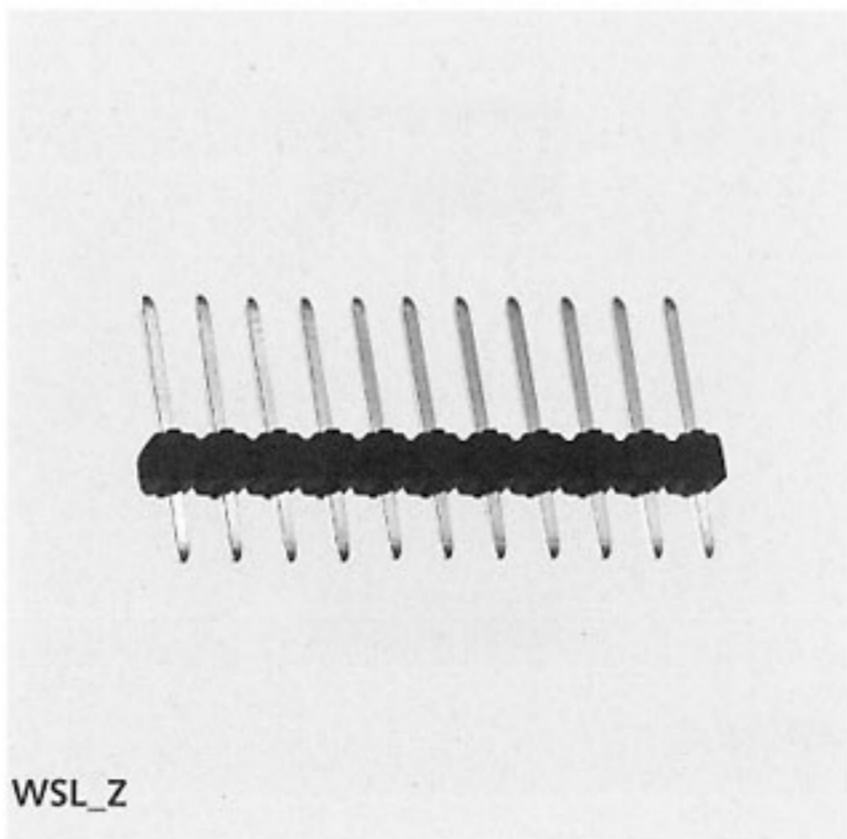

WSL_Z

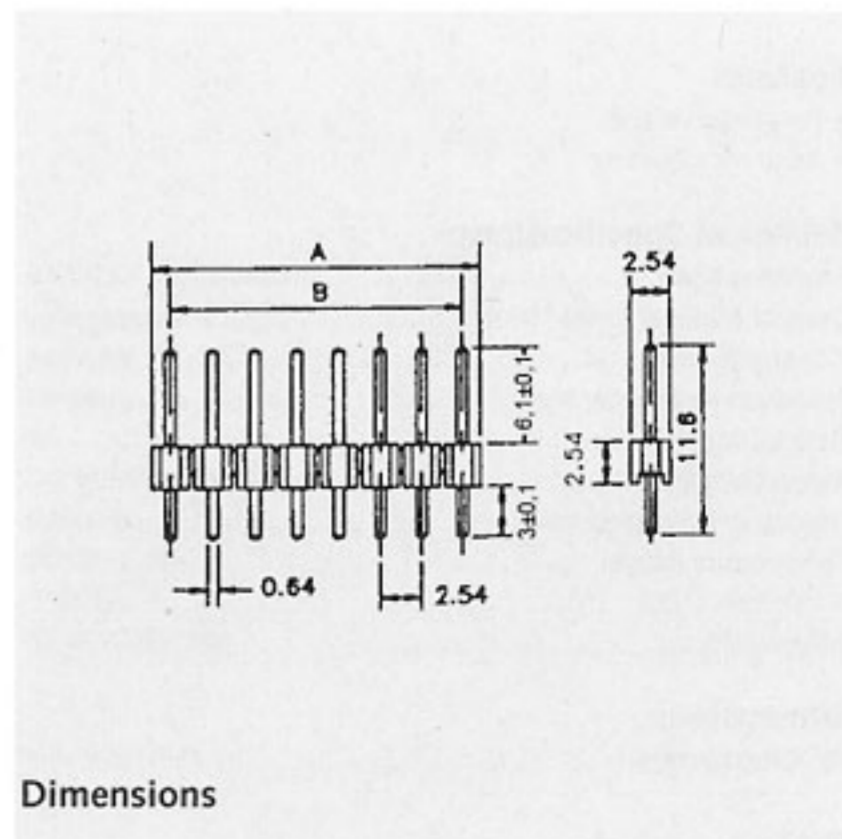

Dimensions