

SAFETY ISOLATING TRANSFORMER


POWER : 2.8VA
 INPUT VOLTAGE : 230V
 FREQUENCY : 50/60Hz
 NOMINAL OUTPUT VOLTAGE : 24V~

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER
 IPOD

UL94V0
 OPERATING TEMPERATURE : -25°C to 40°C
 STORAGE TEMPERATURE : -25°C to 85°C
 INSULATION CLASS (IEC85) : B
 INHERENT PROTECTION

STANDARDS :

- UL506 (File E111078)
- CSA 22-2 (File E111078)
- VDE (File Ref:1398300)
- EN60950 (File Ref:1398300)
- EN61558-1 (File Ref:1398300)
- EN61558-2-6 (File Ref:1398300)
- CE

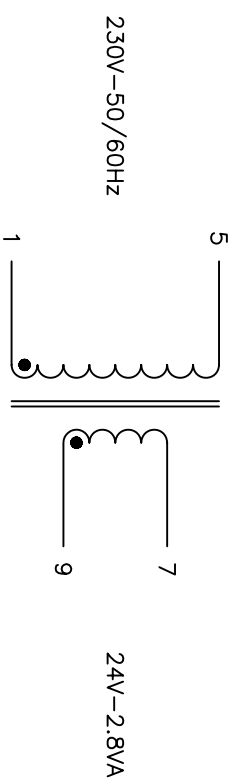

Emittance:		Tolerance générale:	
Emittent:		General tolerance:	

Echelle:	1:1	Matériau:	
Material:			
Dessiné par:	ROUSSEL.Ch	Date:	18/05/2004
Visé:	J.P.M.		

DATA SHEET 44702
EI 30X18



22, Allée du Clos des Champs
 Z.A. Les Portes de la Forêt
 77090 COLEBEEN
 Tél : 01-60-57-55-55
 Fax : 01-60-17-12-00

DS44702

Rev	Date	Modification	Dessiné	Visé
A	10/03/16	Marking updated	SCOTT	J.P.M
B				
C				
D				