

# USB Mounting Jacks

**F4412** = Product group; Product group discount F 44 1\_

## USB Mounting Jacks Angled Series: USB-\_P

### Features

- USB A and B type for PCB mounting
- 90° angled
- Solder version

### USB-AP, USB-BP USB A- and B-Jacks

#### Technical Specifications

Insulator: .....PBT  
Contacts  
USB-AP: .....Brass  
USB-BP: .....Phosphor Bronze  
Rated Current: .....1A  
Breakdown Voltage, 1 Min.: .....1000V AC  
Insulation Resistance: .....>1000MΩ  
Temperature Range: .....-55...+105°C

### USB-ALP USB A-Jack Connector, Low Profile

#### Technical Specifications

Insulator: .....Nylon PA9T  
Contacts: .....Phosphor Bronze  
Rated Current: .....1,5A  
Breakdown Voltage, 1 Min.: .....500V AC  
Insulation Resistance: .....>1000MΩ  
Temperature Range: .....-55...+85°C

### USB-2AP, USB-3AP USB Jacks, 2xA and 3xA

#### Technical Specifications


Insulator: .....PBT  
Contacts: .....Phosphor Bronze  
Rated Current: .....1,5A  
Breakdown Voltage, 1 Min.: .....500V AC  
Insulation Resistance: .....>1000MΩ  
Temperature Range: .....-55...+85°C

### Terms of Delivery


Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Various


Part Nr.	Part description
USB-AP	USB Jack A Print 90°
USB-BP	USB Jack B Print 90°
USB-ALP	USB Jack A Print 90° Low Profile
USB-2AP	USB Jack 2xA Print 90°

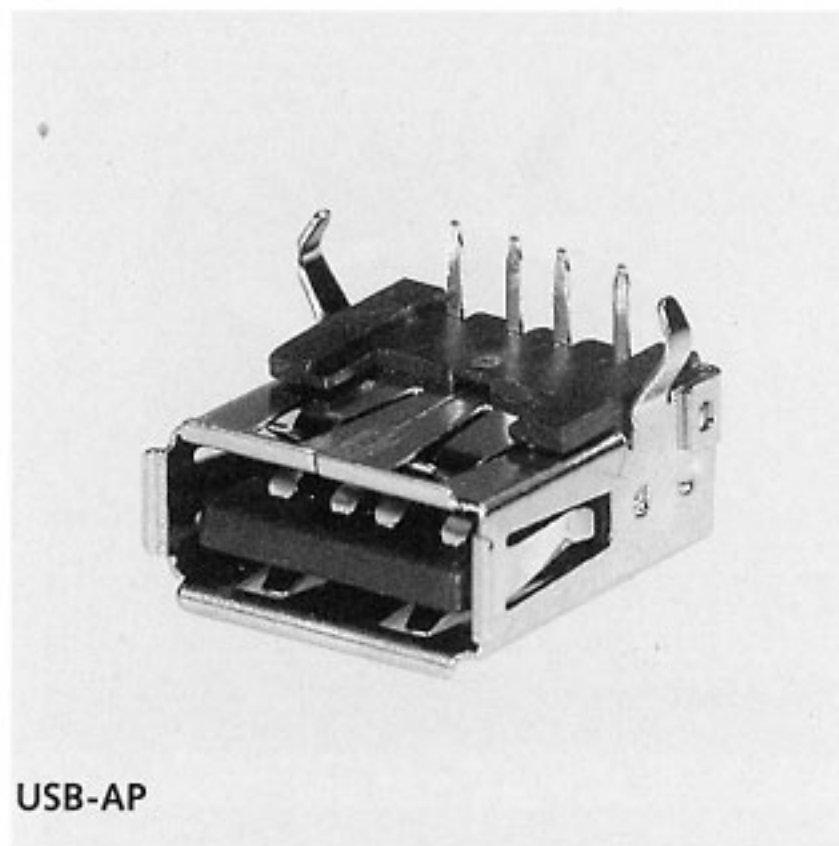


USB-AP

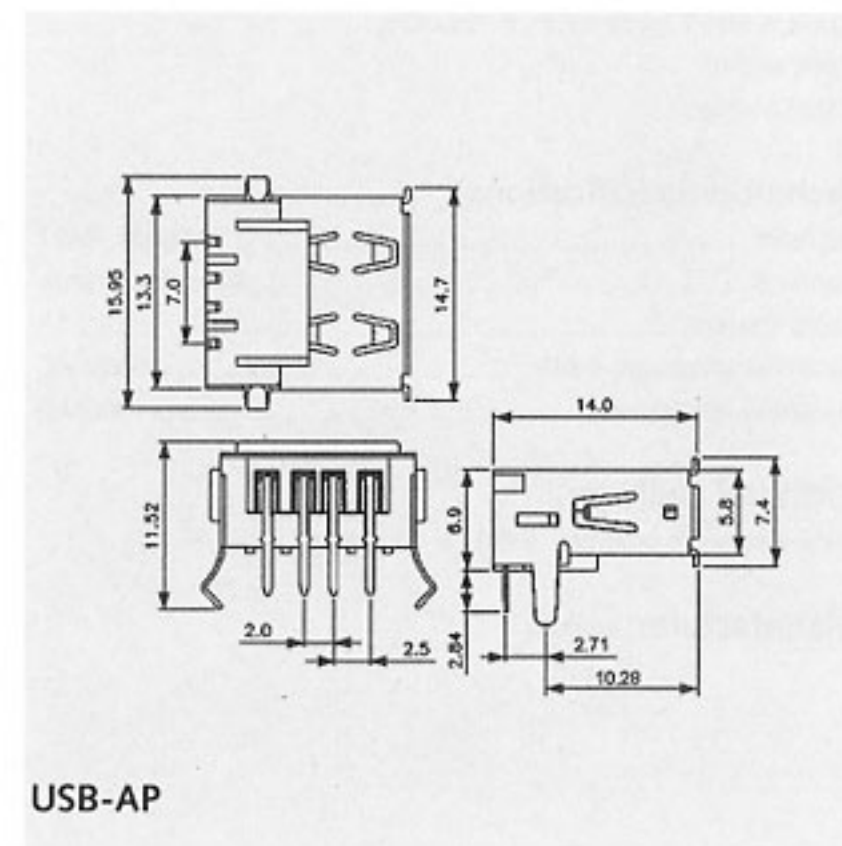


USB-AP

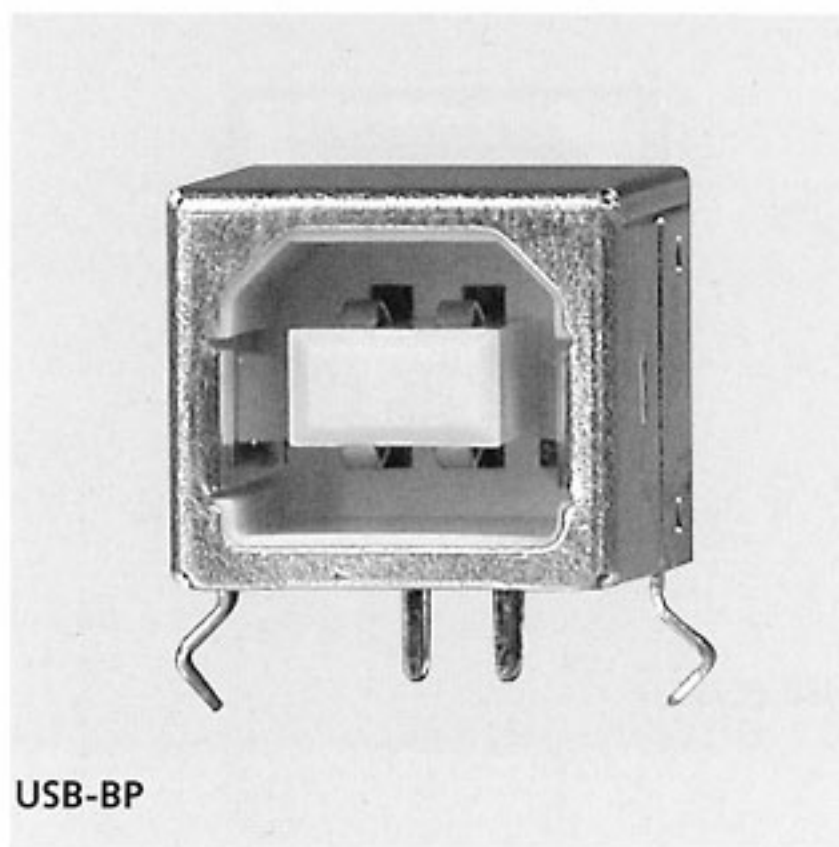


USB-BP

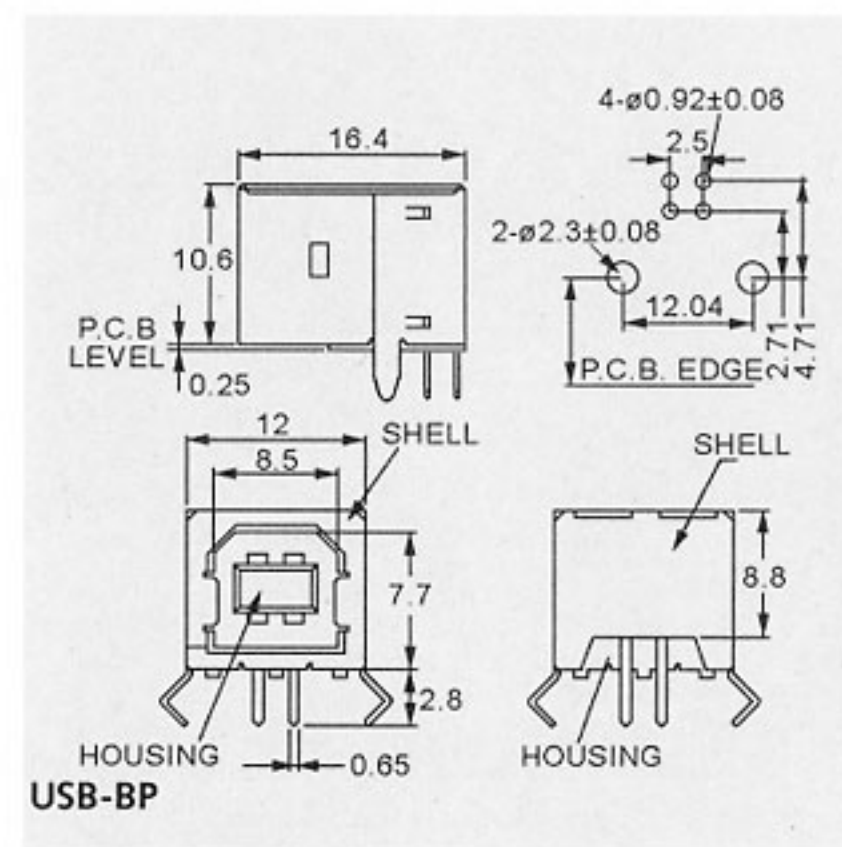


USB-BP

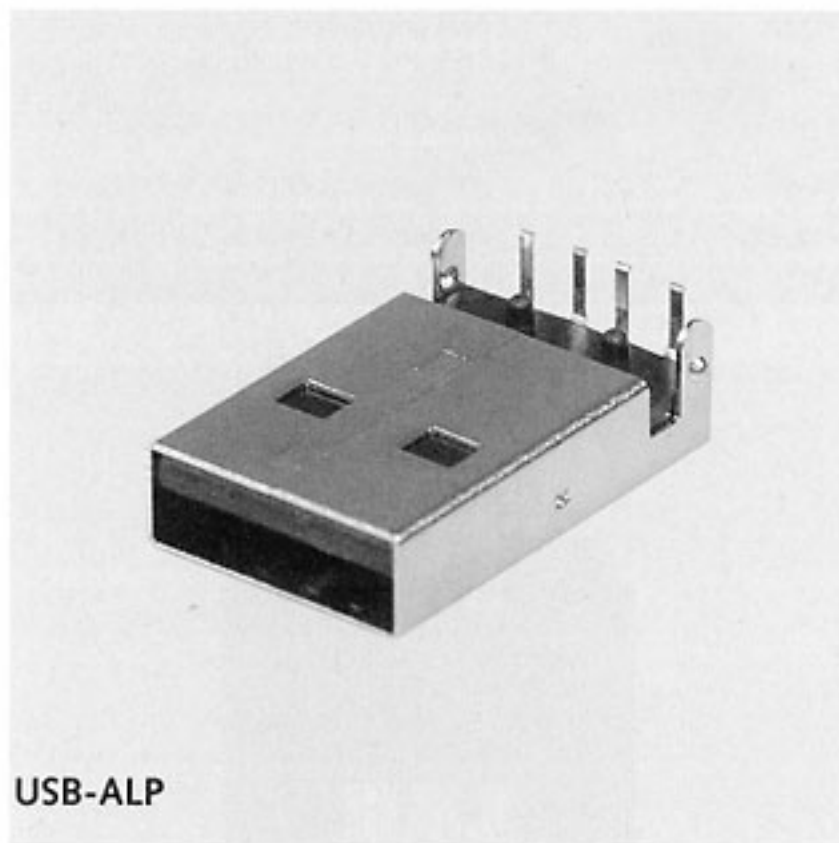


USB-ALP

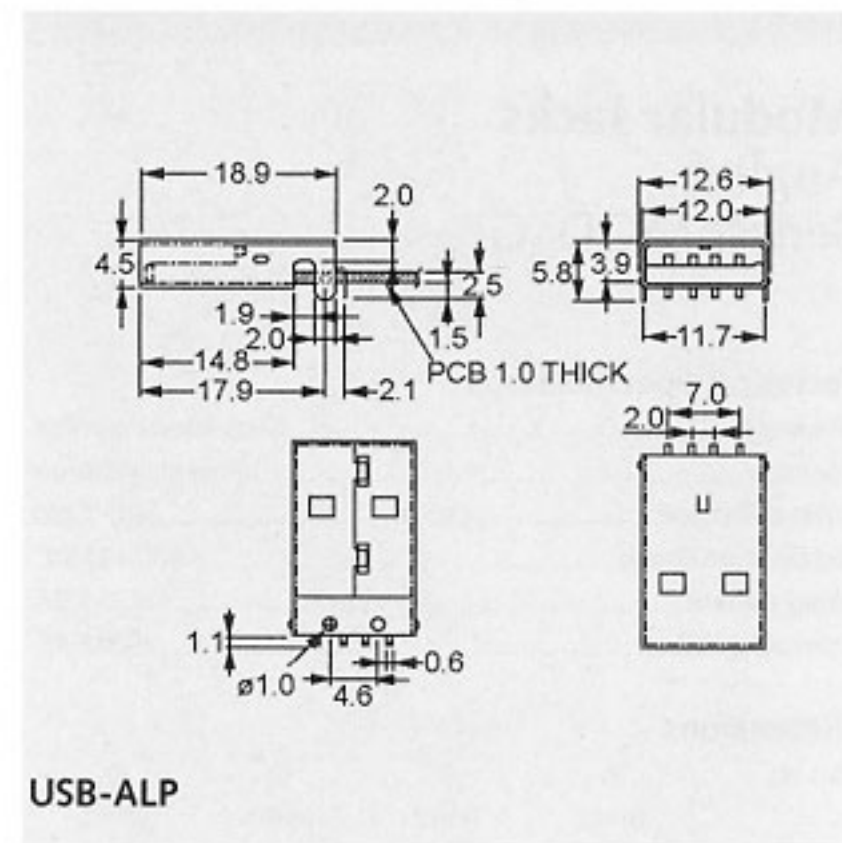

USB-ALP

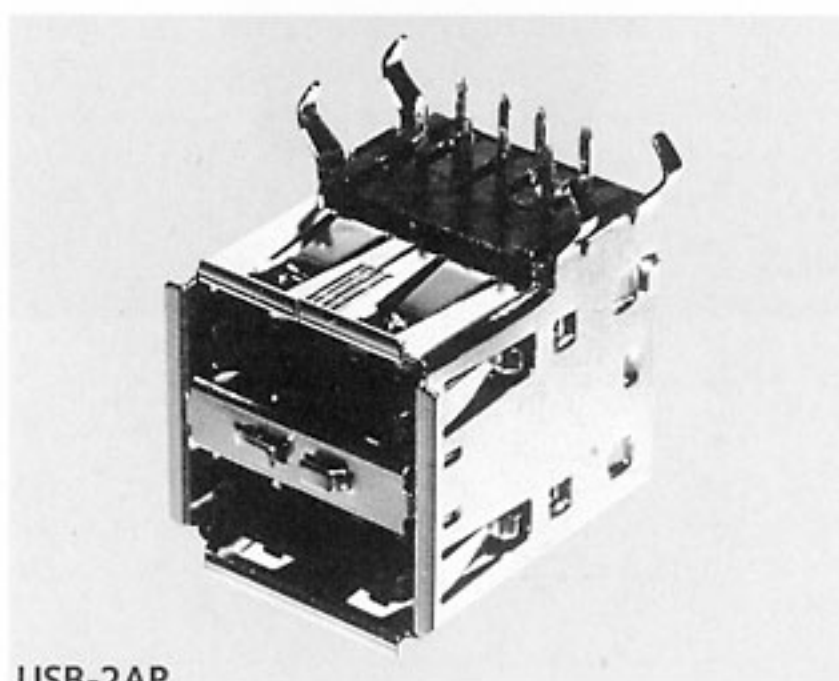

USB-2AP

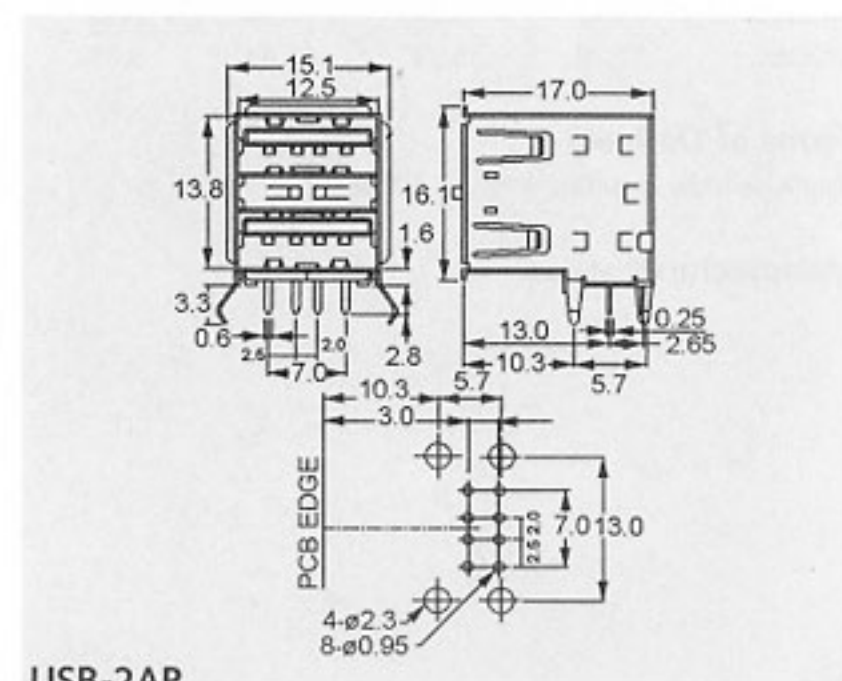

USB-2AP