

億力光電股份有限公司

EVERVISION ELECTRONICS CO., LTD.

Product Specification For LCD Module

(KVPF-7B-002-16)

Model NO. : VGG482709-6UFLWP(RoHS)

REVISION : 1

APPROVAL FOR SPECIFICATIONS ONLY

APPROVAL FOR SPECIFICATIONS AND SAMPLE

CUSTOMER :

STD.


APPROVED BY :

EVERVISION LCM R&D CENTER


APPROVED BY

CHECKED BY


PREPARED BY

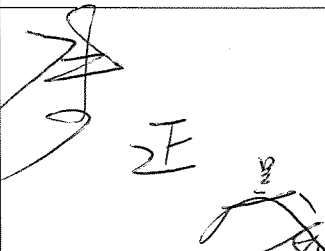


DIRECTOR

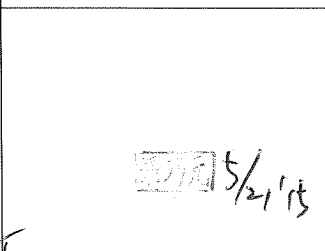

MANAGER

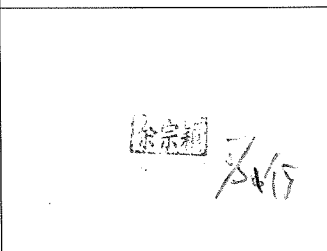

Mechanism Engineer

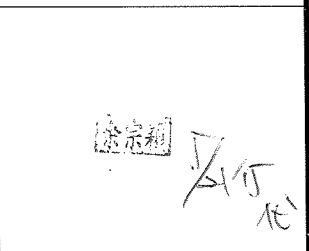

Electronic Engineer

億力光電股份有限公司總公司

EVERVISION ELECTRONICS LTD.

台北市中和市建一路 186 號 12 樓
12F., No.186, Jian 1st Rd., Zhonghe Dist., New
Taipei City 235, Taiwan (R.O.C.)

TEL : +886 2 8227-2788

FAX : +886 2 8227-2799

億力光電股份有限公司台中分公司

EVERVISION ELECTRONICS(T.C) LTD.

台中市潭子區建國路 19 號
No.19, Jianguo Rd., Tanzi Dist., Taichung City 427,
Taiwan (R.O.C.)

TEL : +886 4 2532-8889

FAX : +886 4 2532-6689

東莞莞城德寶電子廠

EVERVISION ELECTRONICS(B.V.I) LTD.

廣東省東莞市城區東縱大道天寶路 9 號
NO.9,Tian Bao Rd.,Dong Zong St.,Dong Guan City
Guang Dong. China.

TEL : +86 769 2220 5258

FAX : +86 769 2220 7258

勁佳光電(昆山)有限公司

EVERVISION ELECTRONICS(KUNSHAN) LTD.

江蘇省昆山市玉山鎮高科技工業園城北路 8 號
NO.8,Chengbei Rd., Hi-Tech Industry Park ,
Yushan Town , Kunshan City , Jiangsu,China.

TEL : +86 512 5778 7288

FAX : +86 512 5777 0688

<http://www.evervisionlcd.com>

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 2 |

1. Table of Contents

| No. | Contents | Page |
|------------|---|-------------|
| 1 | Table of Contents | 2 |
| 2 | Record of Revisions | 3 |
| 3 | Module Numbering System | 4 |
| 4 | Application | 5 |
| 5 | Features | 5 |
| 6 | General Specifications | 5 |
| 7 | Absolute Maximum Ratings | 6 |
| 8 | Electrical Characteristics | 7 |
| 9 | Block Diagram | 9 |
| 10 | Input / Output Terminals Pin Assignment | 10 |
| 11 | Interface Timing | 14 |
| 12 | Optical Characteristics | 16 |
| 13 | Reliability Test | 19 |
| 14 | Packaging | 20 |
| 15 | Precautions | 21 |
| 16 | Outline Drawing | 24 |
| 17 | Definition of Labels | 25 |
| 18 | Incoming Inspection Standards | 27 |

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 4 |

3. Module Numbering System

V G G 4827 09 – 6 U F L W P

Serial No.: A~Z

Backlight Color:
N: Without Backlight;
A: Amber; **B:** Blue; **G:** Green;
L: Yellow; **O:** Orange; **R:** Red;
W: White; **Y:** YellowGreen;
X: Others

Backlight Type:
N: Without Backlight; **E:** EL; **F:** CCFL;
L: General LED; **H:** High NTSC LED ;
R: RGB LED; **X:** Others

LCD Model:
T: TN; **H:** HTN; **G:** STN Gray, **Y:** STN Yellow;
B: STN Blue; **W:** FSTN Black/White;
C: CSTN; **F:** TFT; **O:** OLED; **P:** PLED;
L: LTPS; **N:** Others

LCD Type:
R: Reflective/Positive;
S: Reflective/Negative ;
F: Transflective/Positive ;
G: Transflective/Negative ;
U: Transmissive/Positive ;
T: Transmissive/Negative ; **N:** Others

Temperature Range & View Direction:
 General Purpose : **1:**6H **2:**12H **3:**3H **4:**9H **5:**Others
 High Performance: **6:**6H **7:**12H **8:**3H **9:**9H **0:**Others

STD Product Serial No.: 01~99
 Customer Made Serial No.: A1,A2... A9,B1,B2... B9,C1..

Display Function:
 Segment Number / Characters Lines / Column and Row Dots
 / Length * Width of Other

Display Type:
C: Character Type; **G:** Graphic Type; **S:** Segment Type; **O:** Other

Package Type:
B: COB; **F:** COF; **G:** COG; **H:** Heat Seal; **S:** SMT; **T:** TAB; **O:** Others

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 5 |

4. Application

This specification is applied to the 4.3 inch supported TFT-LCD module With Transparent Touch Panel, and can display true 16.7M colors (8 bit/ color). The module is designed for PMP, GPS, DMB, other electronic products which require flat panel display of digital signal interface, and used as the input devices for general electric appliances via both finger and pen-entry.

5. Features

- WQVGA (480×272 pixels) resolution.
- 24 bit parallel RGB.
- Transparent Touch panel
 - 4-Wire
 - Analog Resistive

6. General Specifications

| Item | Specifications | Unit |
|---------------------|---|------|
| Screen Size | 4.3 (Diagonal) | inch |
| Display Format | 480RGB(H)×272(V) | dot |
| Active Area | 95.04(H)×53.856(V) | mm |
| PIXEL Pitch | 0.198(H)×0.198(V) | mm |
| Pixel Configuration | RGB Vertical Stripe | - |
| Display Mode | TN Type Transmissive Mode Normally White | - |
| Surface Treatment | Anti-Glare and Hard Coating(3H) | - |
| Viewing Direction | 6 O'clock (The Gray Inversion will appear at this direction) | - |
| Outline Dimension | 105.5(W)×67.2(H)×4.2(D) | mm |
| Weight | 57.4 | g |
| RoHS Compliance | Evervision certifies this product to be in compliance with European Union Directive 2011/65/EU on the restriction of certain hazardous substances in electrical and electronic equipment. | - |

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 6 |

7. Absolute Maximum Ratings

7.1 Absolute Ratings of Environment

| Item | Symbol | Value | | Unit | Note |
|-------------------------------|-----------------|-------|------|------|--------|
| | | Min. | Max. | | |
| Storage Temperature | T _{ST} | -30 | +80 | °C | (1)(2) |
| Operating Ambient Temperature | T _{OP} | -20 | +70 | °C | (1)(2) |

Note1: Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note2: Please refer to item of RELIABILITY.

7.2 Electrical Absolute Ratings

7.2.1 TFT-LCD Module

(Ta=25±2°C, VSS=0V)

| Item | Symbol | Value | | Unit | Note |
|------------------------------|--------|-------|------|------|------|
| | | Min. | Max. | | |
| Digital Power Supply Voltage | DVDD | -0.3 | 4.0 | V | - |

7.2.2 Backlight Unit

(Ta=25±2°C)

| Item | Symbol | Value | | Unit | Note |
|---------------------------|----------------|-------|------|------|------|
| | | Min. | Max. | | |
| Current of Backlight Unit | I _B | - | 25 | mA | (1) |
| Reverse Voltage | V _R | - | 50 | V | (1) |

Note (1) Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is loaded.

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 7 |

8. Electrical Characteristics

8.1 TFT-LCD Module

(Ta=25±2°C)

| Item | Symbol | Value | | | Unit | Note |
|------------------------------|----------------|---------|-------|----------|------|------|
| | | Min. | Typ. | Max. | | |
| Digital Power Supply Voltage | DVDD | 3.0 | 3.3 | 3.6 | V | - |
| Input High Threshold Voltage | VIH | 0.7DVDD | - | DVDD | V | - |
| Input Low Threshold Voltage | VIL | 0 | - | 0.3 DVDD | V | - |
| VSYNC Frequency | F _V | - | 59.94 | - | Hz | - |
| HSYNC Frequency | F _H | - | 17.14 | - | KHz | - |
| Pixel Clock | PCLK | - | 9.0 | 15.0 | MHz | - |


(VSS = 0V)

| Parameter | SYMBOL | Condition | Min. | Typ. | Max. | Unit | Remarks |
|-------------------------|--------|-----------|------|-------|--------|------|---------|
| Digital Current | IDVDD | DVDD=3.3V | - | 22.8 | 31.92 | mA | (1) |
| Total Power Consumption | PC | - | - | 75.24 | 105.34 | mW | (1) |

Note (1) The specified power consumption is under the conditions at DVDD = 3.3V,

FV=60Hz, DCLK=9.0 MHz, whereas a power dissipation check Pattern below is displayed.

Black Pattern / 0 Gray



Active Area

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 8 |

8.2 Backlight Unit

(Ta=25±2°C)

| Item | Symbol | Value | | | Unit | Note |
|---------------------------|-----------------|-------|-------|------|------|------|
| | | Min. | Typ. | Max. | | |
| LED Voltage | VL | - | (33) | - | V | (1) |
| Current of Backlight Unit | I _B | - | 20 | - | mA | (1) |
| Power Consumption | P _{BL} | - | (660) | - | mW | (1) |
| LED life time | - | 40000 | 50000 | - | Hr | (2) |


Note (1) The driving design of backlight unit is dependent on serial consideration of 10 LEDs.

(2) The LED life time is defined as the module brightness decrease to 50%, original brightness at Ta=25°C , I_B =20mA.

8.3 Transparent Touch panel

| Item | | Value | | | Unit | Note |
|-----------------------|-------------|---------|------|------|------|--------------|
| | | Min. | Typ. | Max. | | |
| Operating Voltage | | - | 5 | 10 | V | - |
| Terminal Resistance | X-direction | 300 | - | 1500 | Ω | At connector |
| | Y-direction | 50 | - | 700 | Ω | At connector |
| Insulation Resistance | | ≥ 20MΩ | | | | at DC25V |
| Chatting | | ≤ 10 ms | | | | At connector |
| Linearity | | ≤ 1.5% | | | | |

**9. Block Diagram
TFT-LCD Module with Backlight Unit**

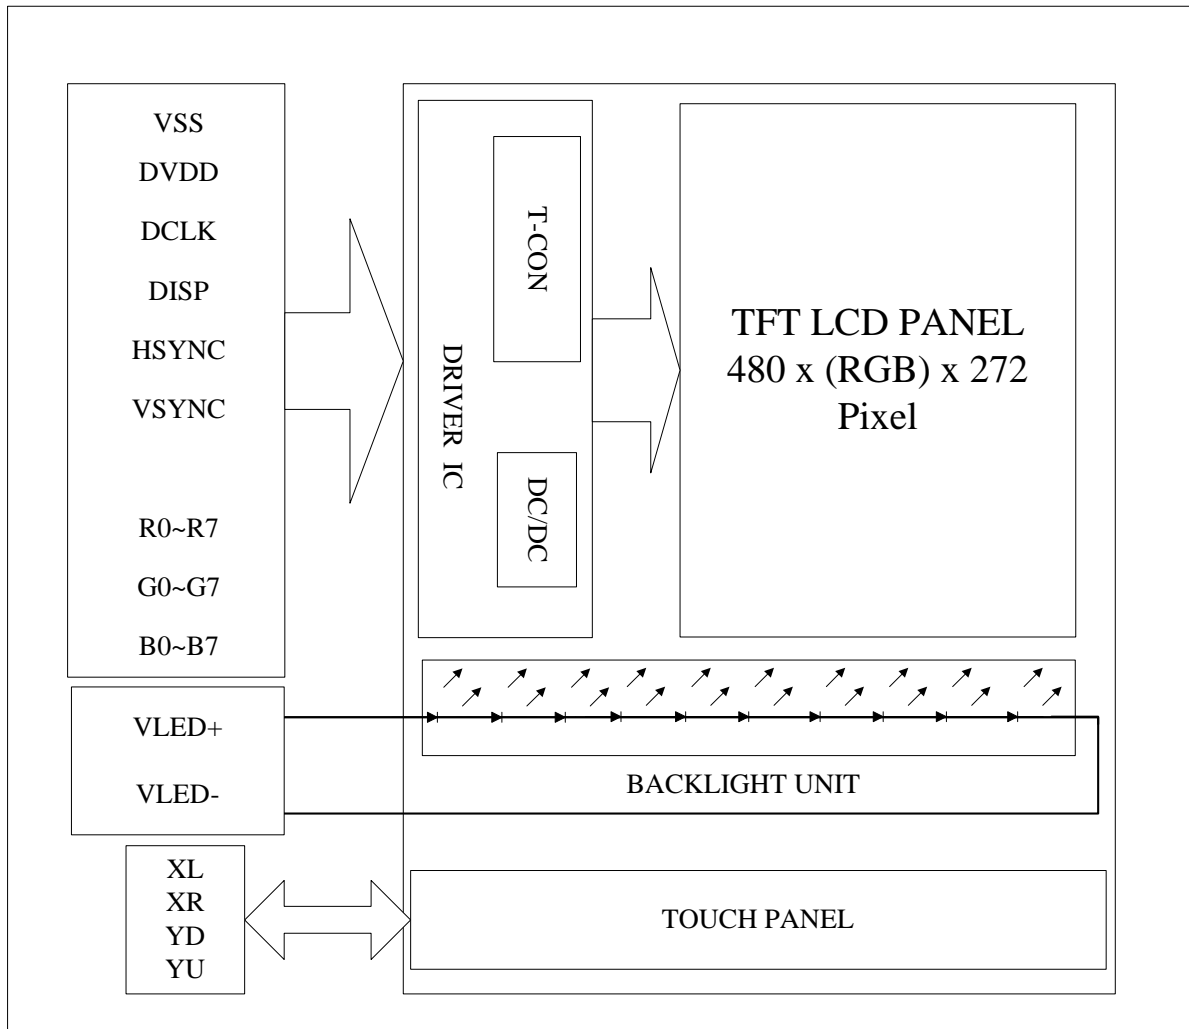

10. Input / Output Terminals Pin Assignment**10.1 TFT-LCD Module**

(Reference Connector :

Hirose Electric CO., LTD. Product No.: FH12A-40S-0.5SH(55) Top contact type)

| Pin No. | Symbol | Description | Pin No. | Symbol | Description |
|---------|--------|---------------------|---------|--------|--|
| 1 | VSS | Ground | 21 | B0 | Blue data(LSB) |
| 2 | VSS | Ground | 22 | B1 | Blue data |
| 3 | DVDD | POWER SUPPLY(+3.3V) | 23 | B2 | Blue data |
| 4 | DVDD | POWER SUPPLY(+3.3V) | 24 | B3 | Blue data |
| 5 | R0 | Red data(LSB) | 25 | B4 | Blue data |
| 6 | R1 | Red data | 26 | B5 | Blue data |
| 7 | R2 | Red data | 27 | B6 | Blue data |
| 8 | R3 | Red data | 28 | B7 | Blue data(MSB) |
| 9 | R4 | Red data | 29 | VSS | Ground |
| 10 | R5 | Red data | 30 | PCLK | Pixel clock |
| 11 | R6 | Red data | 31 | DISP | Display ON/OFF Signal |
| 12 | R7 | Red data(MSB) | 32 | HSYNC | Horizontal Sync input with negative polarity |
| 13 | G0 | Green data(LSB) | 33 | VSYNC | Vertical Sync input with negative polarity |
| 14 | G1 | Green data | 34 | NC | NC |
| 15 | G2 | Green data | 35 | NC | NC |
| 16 | G3 | Green data | 36 | NC | NC |
| 17 | G4 | Green data | 37 | NC | NC |
| 18 | G5 | Green data | 38 | NC | NC |
| 19 | G6 | Green data | 39 | NC | NC |
| 20 | G7 | Green data(MSB) | 40 | NC | NC |

10.2 Backlight

(Reference Connector :

Kyocera Elco Corporation Product No. : 6298 Bottom contact type)

| Terminal No. | Signal | Functions |
|--------------|--------|--|
| 1 | VLED- | LED Power Source Input terminal (Cathode side) |
| 2 | NC | No Connection |
| 3 | NC | No Connection |
| 4 | VLED+ | LED Power Source Input terminal (Anode side) |

10.3 Touch panel

(Reference Connector: FCI (59453-041110) ,(59453-042110)


| No. | Symbol | Functions |
|-----|--------|-----------------------|
| 1 | XL | X-axis left terminal |
| 2 | YD | Y-axis lower terminal |
| 3 | XR | X-axis right terminal |
| 4 | YU | Y-axis upper terminal |

10.4 Color Data Input Assignment

The brightness of each primary color(red, green and blue) is based on the 8 bit gray scale data input for the color. The higher the binary input, the brighter the color. The table provides the assignment of color versus data input.

| Color | | Data Signal | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|-----------------|-------------|----|----|----|----|----|----|----|-------|----|----|----|----|----|----|----|------|----|----|----|----|----|----|----|
| | | Red | | | | | | | | Green | | | | | | | | Blue | | | | | | | |
| | | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Colors | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Gray Scale Of RED | Red(0) / Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Red(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Red(2) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | Red(253) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Red(254) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Red(255) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Gray Scale Of Green | Green(0) / Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Green(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Green(2) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | Green(253) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Green(254) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Green(255) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Gray Scale Of Blue | Blue(0) / Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | Blue(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | | |
| | Blue(2) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | Blue(253) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | | |
| | Blue(254) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | | |
| | Blue(255) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |

10.5 Power ON/OFF Sequence

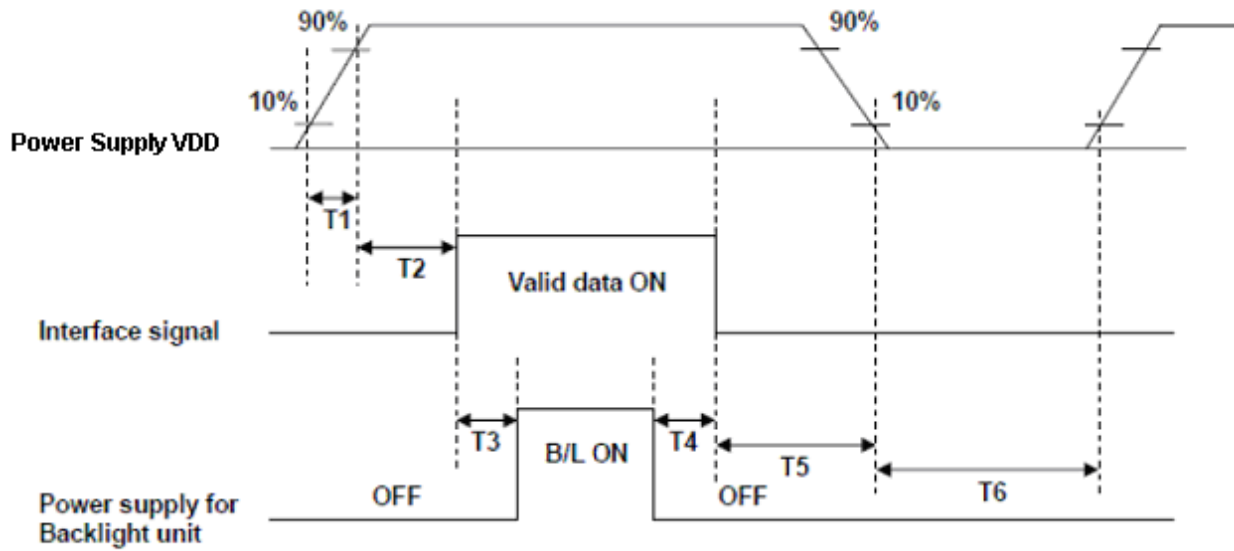

POWER SEQUENCE TABLE

| Parameter | Value | | | Units |
|-----------|-------|-----|------|-------|
| | Min. | Typ | Max. | |
| T1 | 0.5 | - | 10 | ms |
| T2 | 2 | - | - | ms |
| T3 | 200 | - | - | ms |
| T4 | 200 | - | - | ms |
| T5 | 2 | - | - | ms |
| T6 | 1000 | - | - | ms |

11. Interface Timing

11.1 Timing Requirement 1

| Parameter | Symbol | Spec. | | | Unit |
|---------------------------|--------------------|-------|-------|------|------------------|
| | | Min. | Typ. | Max. | |
| Clock cycle | $f_{CLK}^{(1)}$ | - | 9 | 15 | MHz |
| Hsync cycle | $1/th$ | - | 17.14 | - | KHz |
| Vsync cycle | $1/tv$ | - | 59.94 | - | Hz |
| Horizontal Signal | | | | | |
| Horizontal cycle | th | 525 | 525 | 605 | CLK |
| Horizontal display period | thd | 480 | 480 | 480 | CLK |
| Horizontal front porch | thf | 2 | 2 | 82 | CLK |
| Horizontal pulse width | thp ⁽²⁾ | 2 | 41 | 41 | CLK |
| Horizontal back porch | thb ⁽²⁾ | 2 | 2 | 41 | CLK |
| Vertical Signal | | | | | |
| Vertical cycle | tv | 285 | 286 | 399 | H ⁽¹⁾ |
| Vertical display period | tvd | 272 | 272 | 272 | H ⁽¹⁾ |
| Vertical front porch | tvf | 1 | 2 | 227 | H ⁽¹⁾ |
| Vertical pulse width | tvp ⁽²⁾ | 1 | 10 | 11 | H ⁽¹⁾ |
| Vertical back porch | tvb ⁽²⁾ | 1 | 2 | 11 | H ⁽¹⁾ |

Note: (1) Unit: CLK=1/ f_{CLK} , H= th,

(2) It is necessary to keep $tv_p+tv_b=12$ and $th_p+th_b=43$ in sync mode. DE mode is unnecessary to keep it.

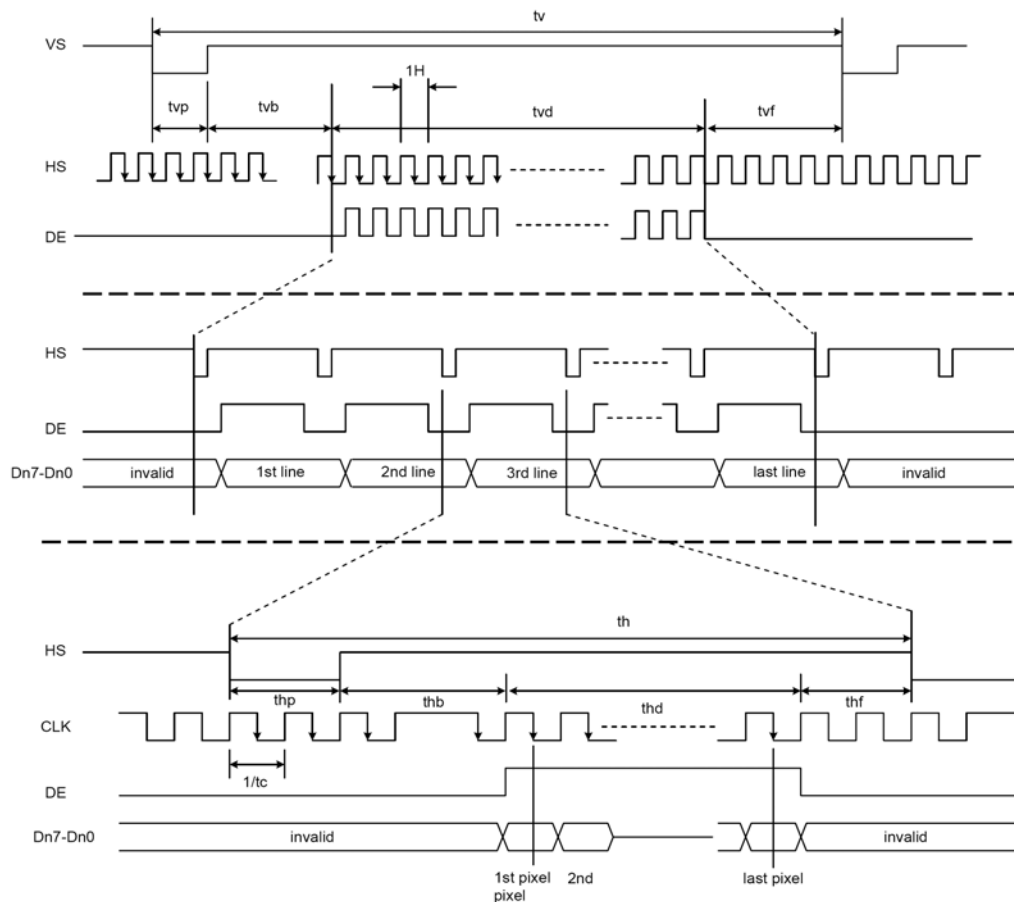


Figure 11.1 Input timing

11.2 Timing Requirement 2

(TA =25°C, DVDD=3.0V to 3.6V, VSS= 0V, tr (1)=tf (1)=2ns)

| PARAMETER | Symbol | Min. | Typ. | Max. | Unit |
|-------------------------|-----------------|------|------|------|------|
| DISP setup time | t_{diss} | 10 | - | - | ns |
| DISP hold time | t_{dish} | 10 | - | - | ns |
| Clock period | PW_{CLK}^{*1} | 66.7 | - | - | ns |
| Clock pulse high period | PWH^{*1} | 26.7 | - | - | ns |
| Clock pulse low period | PWL^{*1} | 26.7 | - | - | ns |
| Hsync setup time | t_{hs} | 10 | - | - | ns |
| Hsync hold time | t_{hh} | 10 | - | - | ns |
| Data setup time | t_{ds} | 10 | - | - | ns |
| Data hold time | t_{dh} | 10 | - | - | ns |
| Vsync setup time | t_{vhs} | 10 | - | - | ns |
| Vsync hold time | t_{vhh} | 10 | - | - | ns |

Note:

1. For parallel interface, maximum clock frequency is 15MHz.
2. tr, tf is defined 10% to 90% of signal amplitude.

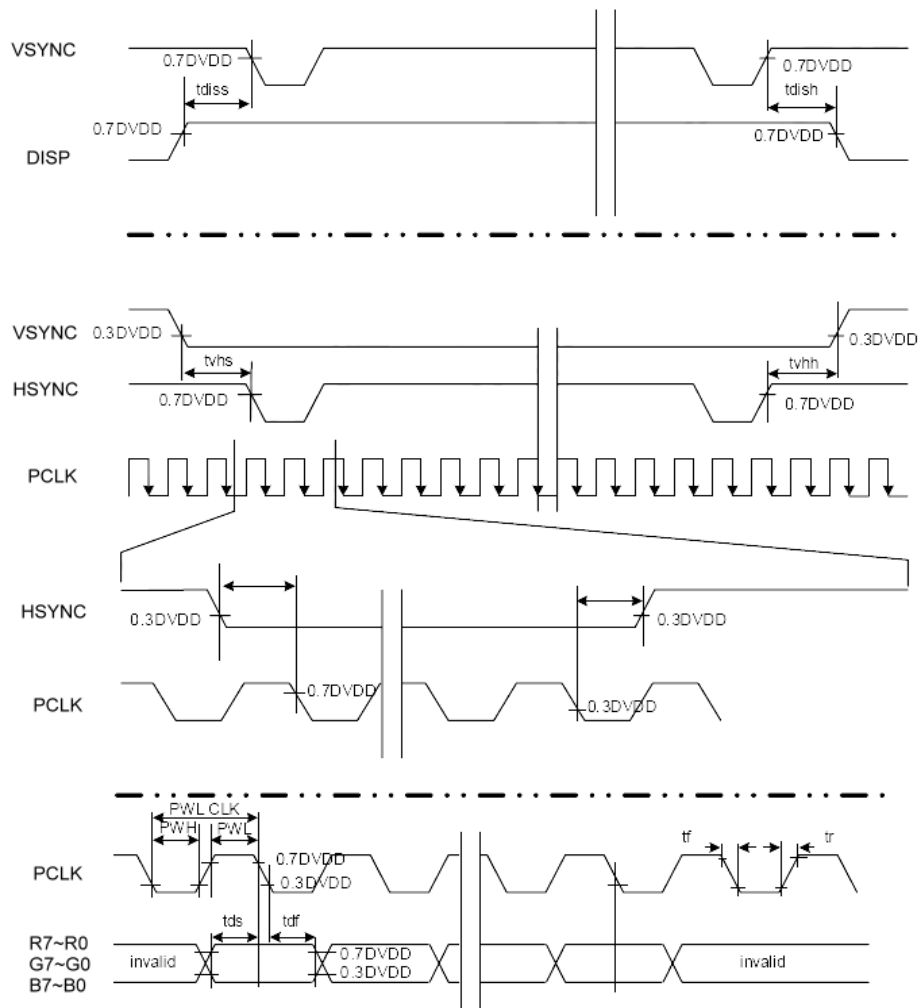



Figure 11.2 Input setup timing

12. Optical Characteristics

The optical characteristics should be measured in a dark environment (≤ 1 lux) or equivalent state with the methods shown in Note (5).

| Item | | Symbol | Conditions | Min. | Typ. | Max. | Unit | Note |
|-----------------------|------------|---------------|--|-------|-------|-------|-------------------|---------|
| Contrast Ratio | | CR | $\theta_x=0^\circ, \theta_y=0^\circ$ Viewing Normal Angle | 300 | (450) | - | - | (2),(5) |
| Response Time | | $T_{R+} T_F$ | | - | 20 | - | ms | (3) |
| Luminance (Center) | | LC | | 600 | (770) | - | cd/m ² | (4),(5) |
| Brightness uniformity | | BUNI | | 70 | (75) | - | % | (5),(6) |
| Color Chromaticity | Red | Rx | | 0.570 | 0.620 | 0.670 | - | (1),(5) |
| | | Ry | | 0.290 | 0.340 | 0.390 | - | |
| | Green | Gx | | 0.290 | 0.340 | 0.390 | - | |
| | | Gy | | 0.510 | 0.560 | 0.610 | - | |
| | Blue | Bx | | 0.090 | 0.140 | 0.190 | - | |
| | | By | | 0.050 | 0.100 | 0.150 | - | |
| | White | Wx | 0.260 | 0.310 | 0.360 | - | | |
| | | Wy | 0.270 | 0.320 | 0.370 | - | | |
| Viewing Angle | Horizontal | θ_{x+} | CR \geq 10 | 55 | (65) | - | deg. | |
| | | θ_{x-} | | 55 | (65) | - | | |
| | Vertical | θ_{y+} | | 40 | (50) | - | | |
| | | θ_{y-} | | 50 | (60) | - | | |


Note (1) Definition of Viewing Angle (θ_x , θ_y):

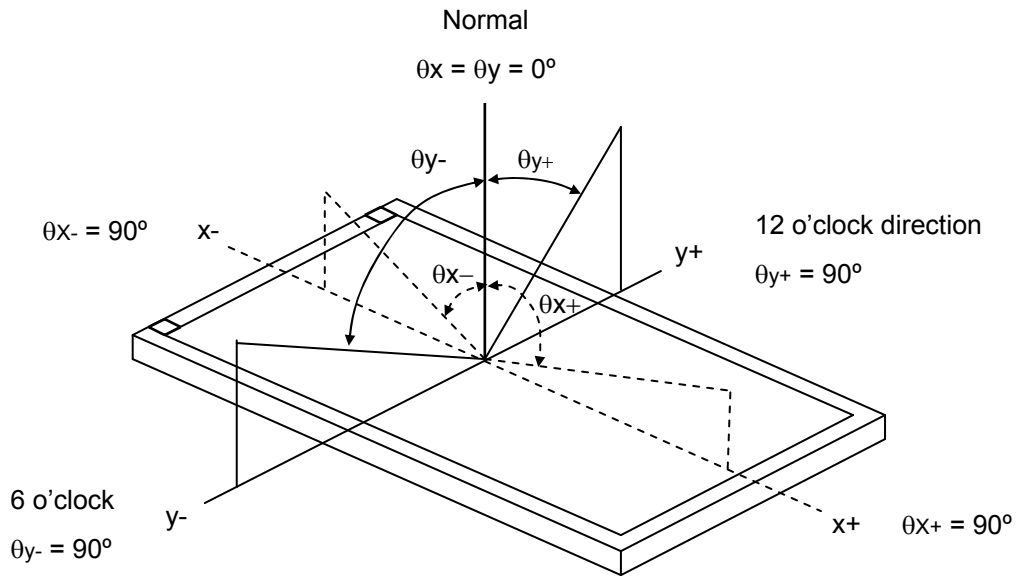

Note (2) Definition of Contrast Ratio (CR):


$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note (3) Definition of Response Time (T_R , T_F):

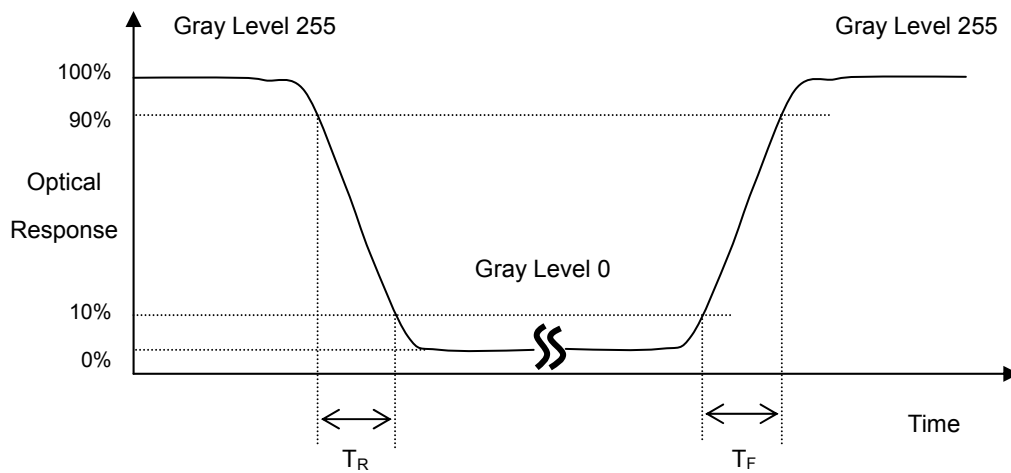


Note (4) Measurement Set-Up:

The LCD module should be stabilized at a given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a dark room or equivalent condition.

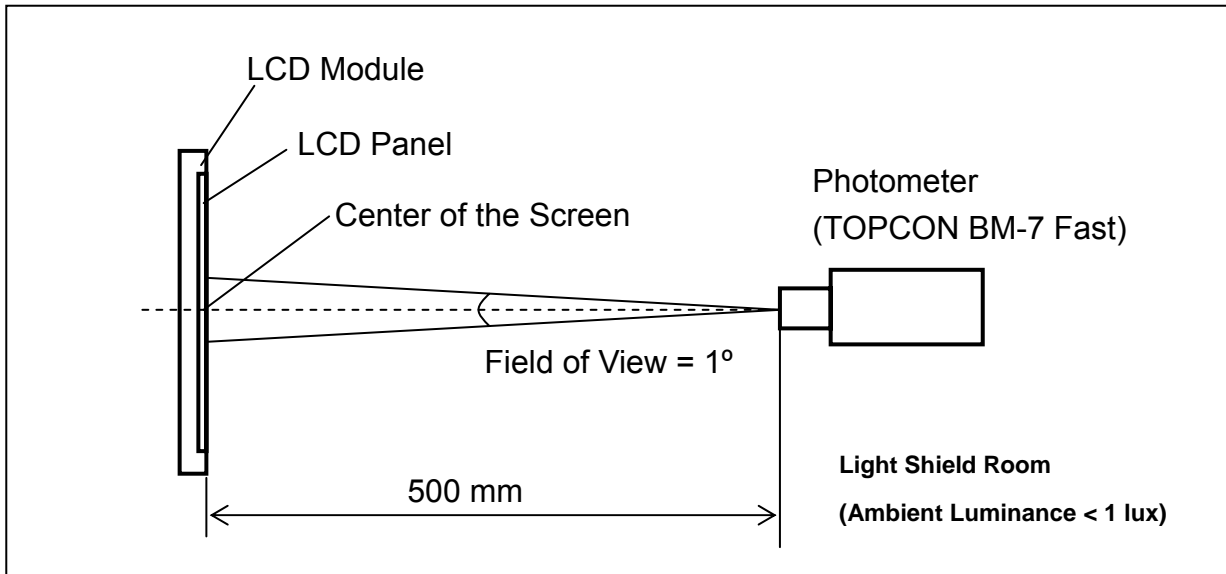

Note (5) Definition of brightness uniformity

Brightness uniformity = (Min Luminance of 9 points) / (Max Luminance of 9 points) × 100%

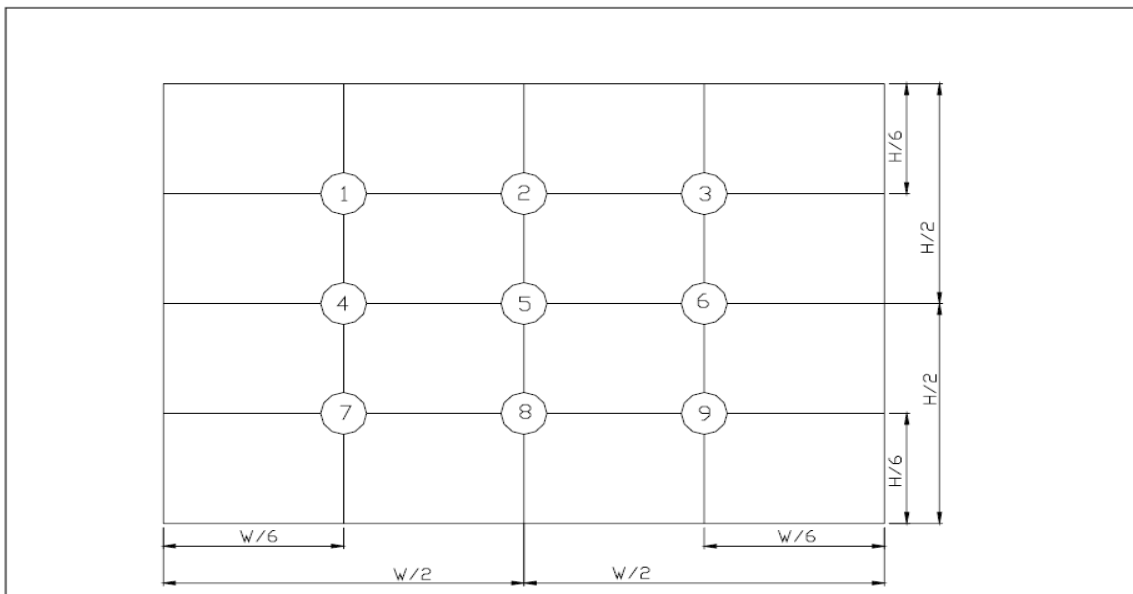

(單位 : mm)

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 19 |

13. Reliability Test

| No. | Test Items | Test Condition | Remark |
|-----|--|---|-------------|
| 1 | High Temperature Storage Test | $T_a = 80^{\circ}\text{C}$ 240 hours | (1),(3),(4) |
| 2 | Low Temperature Storage Test | $T_a = -30^{\circ}\text{C}$ 240 hours | (1),(3),(4) |
| 3 | High Temperature Operation Test | $T_s = 70^{\circ}\text{C}$ 240 hours | (2),(3),(4) |
| 4 | Low Temperature Operation Test | $T_a = -20^{\circ}\text{C}$ 240 hours | (1),(3),(4) |
| 5 | High Temperature and High Humidity Operation Test | $T_a = 60^{\circ}\text{C}$ 90%RH 240 hours | (3), (4) |
| 6 | Electro Static Discharge Test (non-operating) | -Panel Surface/Top Case : 150pF, 330 Ω Air : $\pm 15\text{kV}$, Contact: $\pm 8\text{kV}$ | (3) |
| 7 | Mechanical Shock Test (non-operating) | Half sine wave, 100G, 6ms 3 times shock of each six surfaces | (3) |
| 8 | Vibration Test (non-operating) | Sine wave:10 ~ 55 ~ 10Hz amplitude:1.5mm 3 axis, 2 hours/axis | (3) |
| 9 | Thermal Shock Test (non-operating) | -20°C (30min) ~ 70°C (30min) ,10 cycles | (3) , (4) |
| 10 | Drop Test(with Carton) | Height : 80 _{cm} 1 corner, 3 edges, 6 surfaces | (3) |


Note 1 : T_a is the ambient temperature of samples.

Note 2 : T_s is the temperature of panel' s surface.

Note 3 : In the standard condition, there shall be no practical problem that may affect the display function.
After the reliability test, the product only guarantees operation, but don' t guarantee all of the cosmetic specification.

Note 4 : Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

14. Packaging

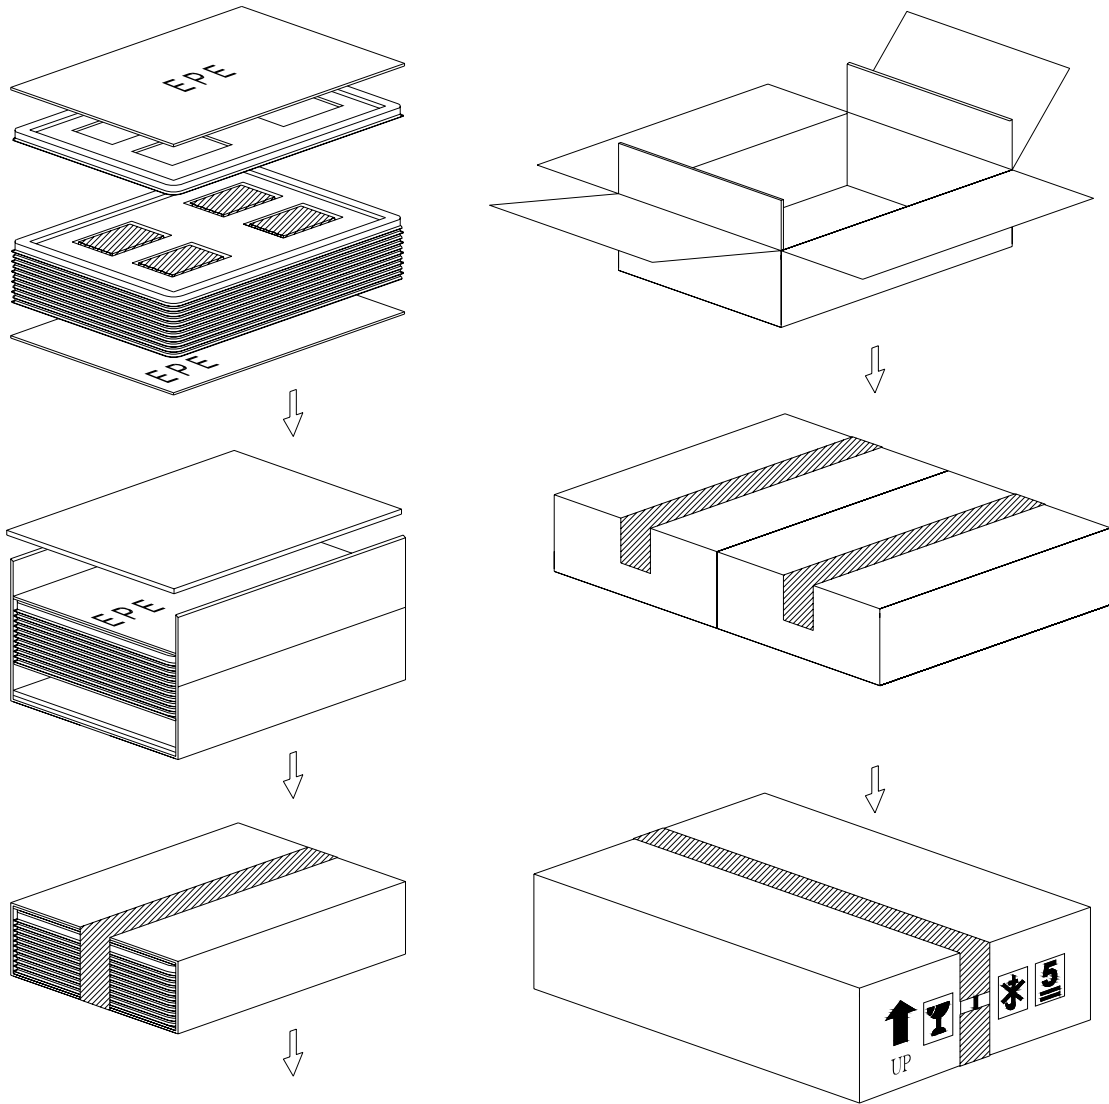

| PARTS LIST | | | | | |
|------------|-------------------|---------------------|----------|-------|------|
| | ITEM | SIZE(LxWxH) unit:mm | MATERIAL | Q.T.Y | NOTE |
| 1 | TRAY | 372.0x262.0x16.0 | | 28 | |
| 2 | EPE(J46) | 372.0x262.0x5.0 | EPE | 4 | |
| 3 | CARD BOARD(P01) | 816.0x375.0x3.5 | CARTON | 2 | |
| 4 | CARD BOARD(P02) | 945.0x275.0x3.5 | CARTON | 2 | |
| 5 | CARD BOARD(P03) | 375.0x265.0x3.5 | CARTON | 4 | |
| 6 | INTERNAL BOX(S01) | 400.0x290.0x150.0 | CARTON | 2 | |
| 7 | EXTERNAL BOX(L28) | 600.0x420.0x180.0 | | 1 | |
| 8 | PRODUCT | 105.5x67.2x4.2 | | 104 | |

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 21 |

15. Precautions

15.1 Assembly and Handling Precautions

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) It's recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) Don't apply pressure or impulse to the module to prevent the damage of LCD panel and Backlight.
- (4) Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.
- (5) Do not plug in or pull out the I/F connector while the module is in operation.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) Moisture can easily penetrate into LCD module and may cause the damage during operation.
- (9) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD module in the specified storage conditions.
- (10) When ambient temperature is lower than 10°C, the display quality might be reduced. For example, the response time will become slow.

15.2 Safety Precautions

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the module's end of life, it is not harmful in case of normal operation and storage.

15.3 Terms of Warrant

- (1) Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- (2) Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.


15.4 Caution

This Evervision LCD module has been specifically designed for use only in electronic devices in the areas of audio control, office automation, industrial control, home appliances, etc. The modules should not be used in applications where module failure could result in physical harm or loss of life, and Evervision expressly disclaims any and all liability relating in any way to the use of the module in such applications.

15.5 Cautions for installing and assembling


Bezel edge must be positioned in the area between the Active area and View area.

The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

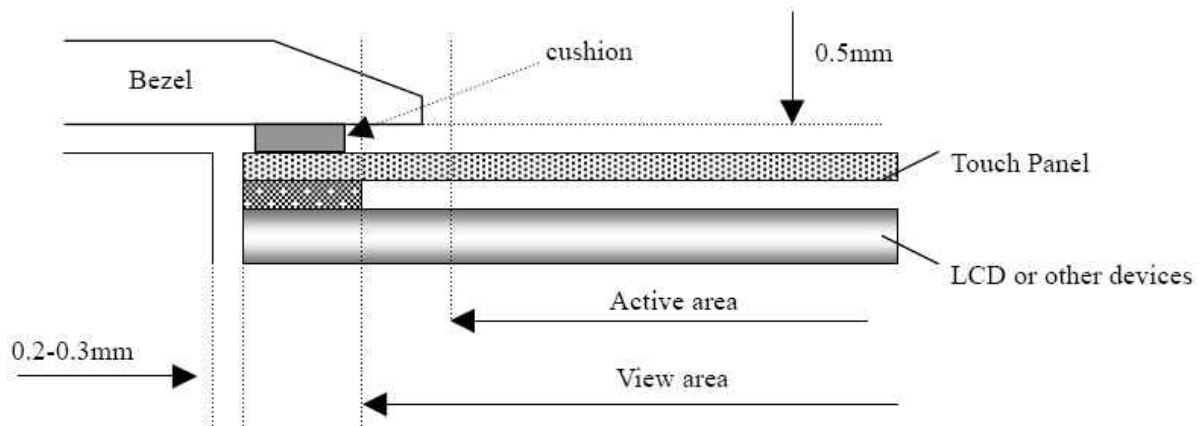

15.6 Operation Prohibit


Not Suggested Pen Input Position On Touch Panel

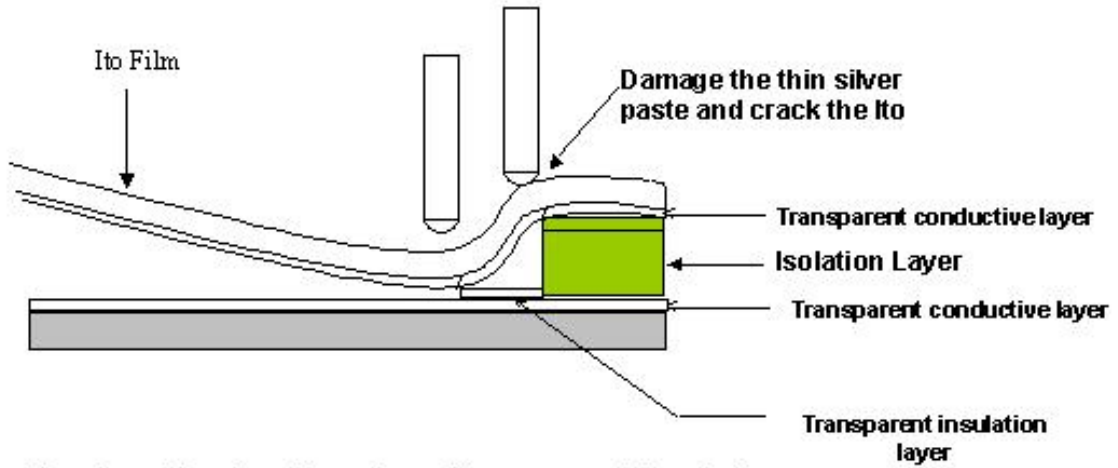

Pen input load on the edge of transparent insulation area might damage the ITO of ITO Pet- Film and reduce the durability of touch panel

16.Outline Drawing

NOTE: Unspecified Tolerance : ±0.5

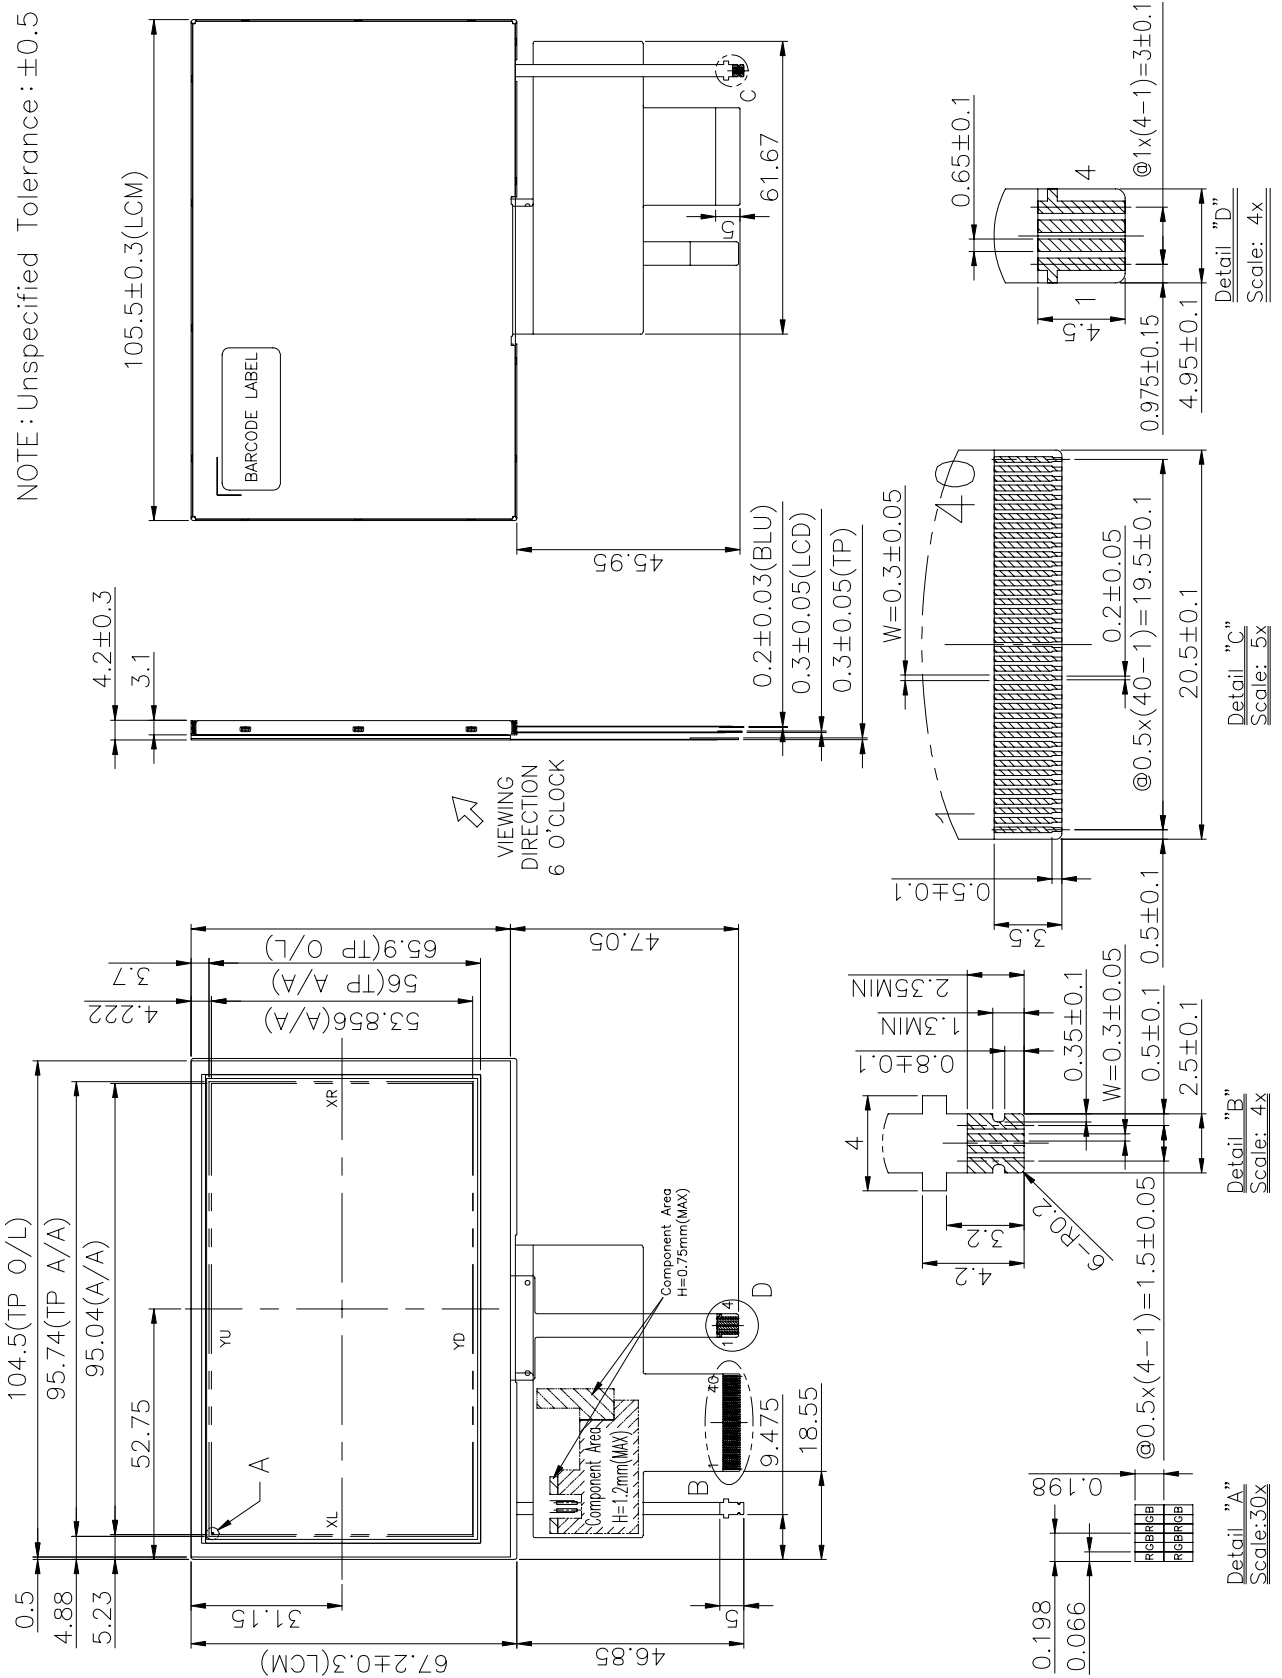

17. Definition of Labels


The bar code nameplate is pasted on each module as illustration, and its definitions are as following explanation.



(a) Module Name : VGG482709-6UFLWP

(b) Serial ID :

A B C D E F G H IJKL

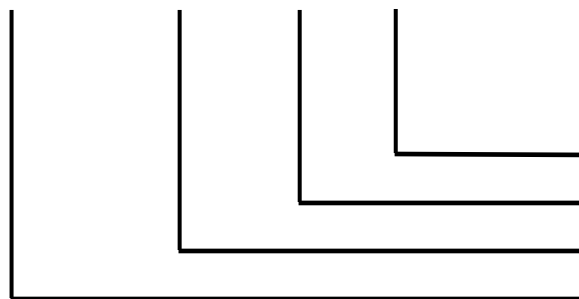

Serial No.
Factory Code
Manufactured Date
Screen Size

Serial ID includes the information as below :

(a) Screen size (Diagonal) : Inch Code (ABCD)

3.5" → 0350

10.4" → 1040

(b) Manufactured Date : Year, Month, Day (EFG)

Year (E)

| | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|
| Year | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
| Mark | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Year | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 |
| Mark | A | B | C | D | E | F | G | H | I | J |

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 26 |

Month (F)

| | | | | | | | | | | | | |
|-------|------|------|------|------|-----|------|------|------|------|------|------|------|
| Month | Jan. | Feb. | Mar. | Apr. | May | Jun. | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
| Mark | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C |

Day (G)

| | | | | | | | | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Day | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| Mark | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F | G |
| Day | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | |
| Mark | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | |

(c) Factory Code (H) :

For EVERVISION internal use.

(d) Serial No. (IJKL) :

Manufacturing sequence of product, for example : 0001~9999.


| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 27 |

18. Incoming Inspection Standards

18.1 The environmental condition of inspection

The environmental condition and visual inspection shall be conducted as below.

- (1) Ambient temperature $25 \pm 5^{\circ}\text{C}$
- (2) Humidity: 45 ~ 65 % RH
- (3) Viewing distance is approximately 30 ~ 40 cm
- (4) Viewing angle is normal to the LCD panel as Fig _1 ($\pm 45^{\circ}$)
- (5) Ambient Illumination: 300 ~ 500 Lux for external appearance inspection

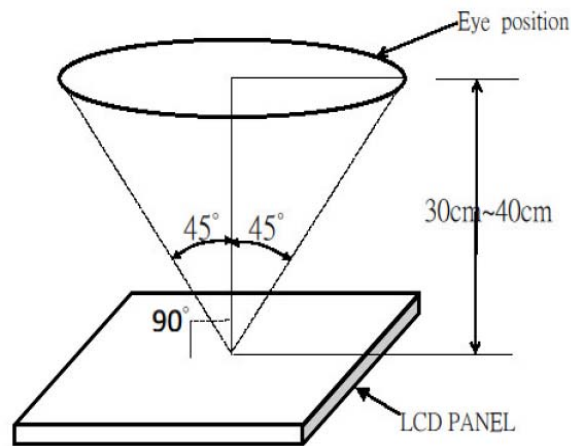

Fig_1

18.2 The defects classify of AQL as following:



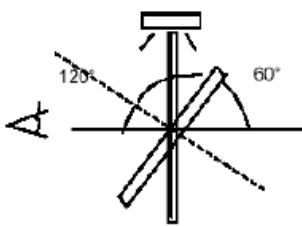

- (1) Test method :According to ANSI/ASQC Z 1.4 .General Inspection Level II take a single time
- (2) The defects classify of AQL as following:

| Class of defects | AQL | Definition |
|------------------|-------|--|
| Major | 0.65% | It is defect that is likely to result in failure or to reduce materially the usability of the intended function. |
| Minor | 1.5% | It is a defect that will not result in functioning problem with deviation classified. |

| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 28 |


18.3 Inspection Parameters

| Item | | Specification/Description | | | Note | |
|---|--|--|-------------------|-------------------|------------|----------------------|
| Display | Function | No Display | | | - | |
| | | Malfunction | | | - | |
| Operating | Contrast ratio | Out of Spec | | | - | |
| | Line defect | No obvious Vertical and Horizontal line defect in bright , dark and colored. | | | - | |
| | Point Defect (red ,green ,blue ,dark ,white) | Item | Acceptable number | | | Note: 1、4、 5、6 |
| | | | A | B | Total | |
| | | BRIGHT DOT | $N \leq 2$ | $N \leq 2$ | $N \leq 7$ | |
| | | DARK DOT | $N \leq 3$ | $N \leq 4$ | | |
| | | TOTAL DOT | $N \leq 4$ | $N \leq 5$ | | |
| TWO ADJACENT DOT | NOT ALLOWED | | | | | |
| THREE OR MORE ADJACENT DOT | NOT ALLOWED | | | | | |
| External Inspection (non-operating or operating) | Scratch (in display area) | L(mm) | W(mm) | Acceptable number | Note:2 | |
| | | $L \leq 2.5$ | $W \leq 0.1$ | 4 | | |
| | | $L > 2.5$ | $W > 0.1$ | 0 | | |
| | Polarizer dent or bubble (in display area) | Dimension(mm) | | Acceptable number | | Note:3 |
| | | $D \leq 0.25$ | | Disregard | | |
| | | $D \leq 0.5$ | | 4 | | |
| | Line Shape (Particles and Lint in display area) | L(mm) | W(mm) | Acceptable number | | Note:2 |
| | | - | $W \leq 0.07$ | Disregard | | |
| | | $L \leq 5$ | $W \leq 0.1$ | 4 | | |
| | | $L \geq 5$ | $W \geq 0.1$ | 0 | | |
| | Dot Shape (Particle in Display area) | Dimension(mm) | | Acceptable number | | Note:3 |
| | | $D \leq 0.25$ | | Disregard | | |
| | | $D \leq 0.5$ | | 4 | | |

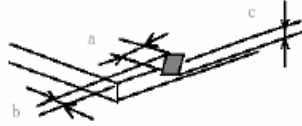
| Item | | Specification/Description | | | Note |
|----------------|---|---------------------------|----------------|--|--------|
| Touch Panel | Scratch | L(mm) | W(mm) | Acceptable number | Note:2 |
| | | L ≤ 10 | W < 0.05 | Disregard | |
| | | | 0.05 ≤ W < 0.1 | N ≤ 4 | |
| | | | W ≥ 0.1 | 0 | |
| | Foreign Materials (Linear shape) | L ≤ 10 | W < 0.05 | Disregard | Note:2 |
| | | | 0.05 ≤ W < 0.1 | N ≤ 3 | |
| | | | W ≥ 0.1 | 0 | |
| | Foreign Materials (Circular shape) | Dimension(mm) | | Acceptable number | Note:3 |
| | | D ≤ 0.25 | | Disregard | |
| | | 0.25 < D ≤ 0.5 | | N ≤ 6 | |
| D > 0.5 | | 0 | | | |
| Glass chipping |  | | | a ≤ 5mm b ≤ 3mm c ≤ t (t : Glass think) | Note:7 |
| |  | | | a ≤ 3mm b ≤ 3mm c ≤ t (t : Glass think) | Note:7 |
| Newton-ring | (In case of doubtful situations) Observe on 60° from the product surface under a white Fluorescent lamp (3-wavelength lamp). | | | Average diameter ≤ 1/3 Touch Panel area Disregard. | Note:7 |
| |  | | | | |
| Membrane Drum |  | | | H ≤ 0.35mm | - |

Note1. The definition of dot defect : The dot defect was judged after repair and the size of a defective dot over 1/2 of whole dot is regarded as one defective dot.


Note2.



Note3. D : Diameter $D=(a+b)/2$



Note4. Bright dot is defined through 2% transmission ND Filter as following.

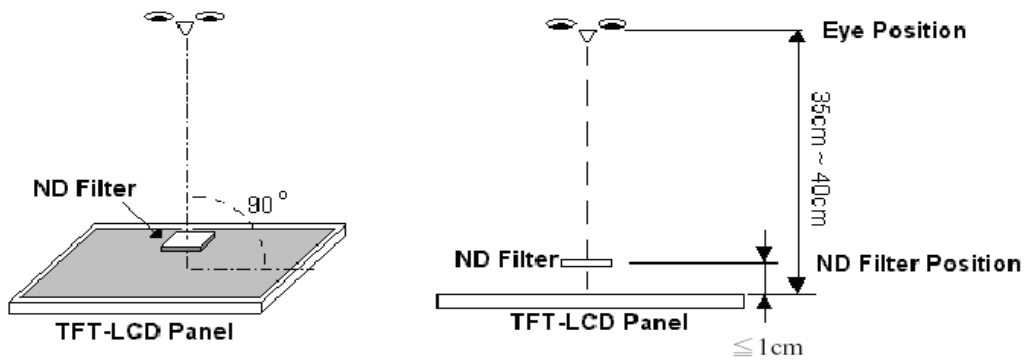


Note5. ADJACENT DOT




| | | | |
|-------------------|------------------|-----------|-------------|
| EVERVISION | MODEL NO. | | PAGE |
| | VGG482709-6UFLWP | SPEC ONLY | 31 |

Note6.

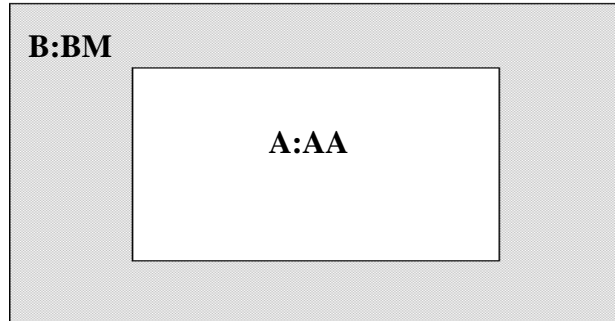

Note7.

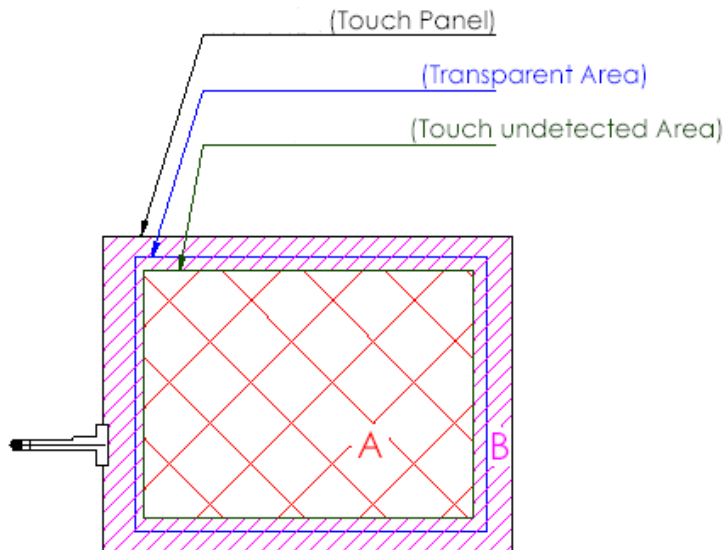

A area : Without any defect point effect on normal operation.

B area : None-specify

18.4 Handling of LCM

- (1) Don't give external shock.
- (2) Don't apply excessive force on the surface.
- (3) Liquid in LCD is hazardous substance. Must not lick and swallow. when the liquid is attach to your hand, skin, cloth etc. Wash it out thoroughly and immediately.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't disassemble the LCM.