


Viewed On Component Side



Schematic

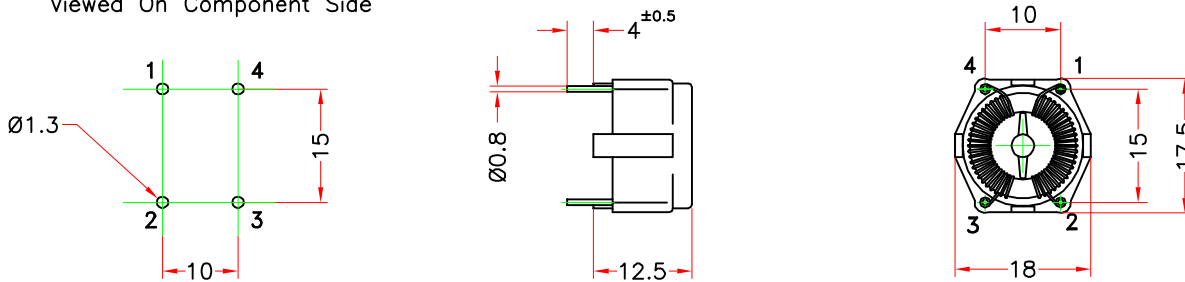


TECHNICAL DATA :

- Core : Toroid \emptyset 14 / \emptyset 9 / H 5 μ i 6000 Ferrite Material
- Wire : \emptyset 0.50 Grade 1 Class F
- Rated Current Per Winding : 3.6A referred to 250V-50Hz and +60°C ambient temperature
- Rated Inductance Per Winding : 0.4mH +50% -30% at 10KHz , 0.1mA
- DC Resistance Per Winding (Typical) : 28m Ω
- Test Voltage Winding to Winding : 1500VAC - 50Hz
- Climatic Category : DIN GKC (-40° to +125°C; humidity cat. C)
- Material Case : PBT at 30% Fibreglass UL94V0
- Packaging Unit : 1350 pieces

RoHS compliance
Please, refer to general catalog for unspecified parameters.

a	
IND	DATE

Radiohm Specification



Designation : 42H17 3600

Part number : _____
Preliminary : Final :

Date : 07/02/2012

Customer Specification Approval

Part number : _____

Signature : _____ Name : _____ Title : _____ Date : _____