


Data sheet



Item no.: 721-102/026-000
 Product description: FEMALE CONNECTOR 2 POLE PIN SPACING 5 MM / 0.197 IN 100% PROTECTED AGAINST MISMATING WITH CODING FINGERS WITH MOUNTING FEET CAGE CLAMP®CONNECTION

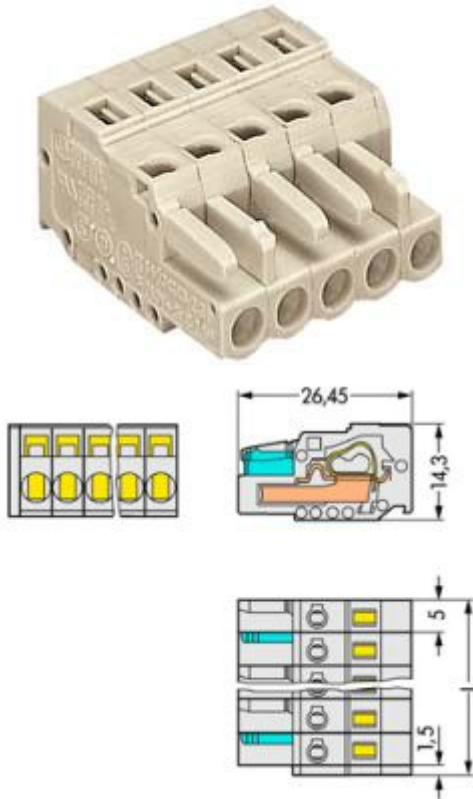

Packing unit 100 pieces

Product group	3 (Multi Conn. System)
Weight	3.87 g
Color	light gray
No. of connection Points	2
No. of potentials	2
pole count	2
Height	14.3 mm
Height	0.563 in
Width	11.5 mm
Width	0.453 in

Depth	26.45 mm
Depth	1.041 in
Pin spacing from	5 mm
Pin spacing from	0.197 in
Pollution degree	2
Measured voltage EN	320 V
Measured shock voltage	4 kV
Current intensity EN	16 A
Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	4 kV
Current intensity EN	16 A
Connection method	CAGE CLAMP® CONNECTION
Cross section [mm²]	0.08 - 2.5 mm²
Wiring method	solid
Cross section [mm²]	0.08 - 2.5 mm²
Cross section [mm²]	0.25 - 1.5 mm²
Cross section [mm²]	0.25 - 2.5 mm²
Cross section [AWG]	28 - 12 AWG
Strip length from	8 mm
Strip length to	9 mm
Material group	I
xxx-xxx/032-000	Strain relief plate 11,5 mm
xxx-xxx/xxx-045	1-PE-3
xxx-xxx/xxx-047	1-2-3-4-5-...

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected