





50-HLN-M

50-HLN-F

high density



high density

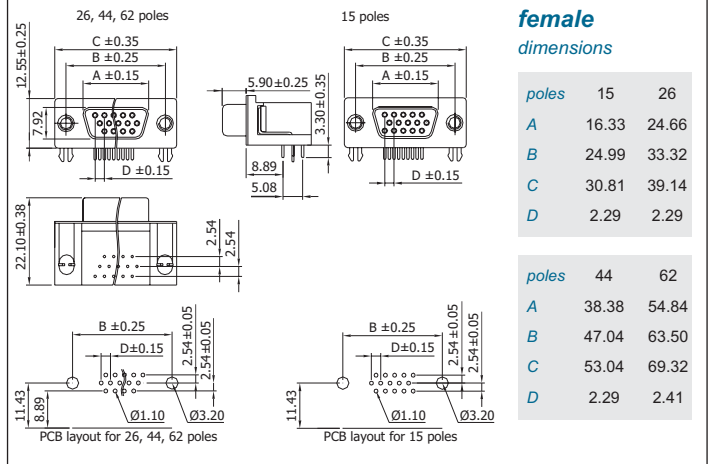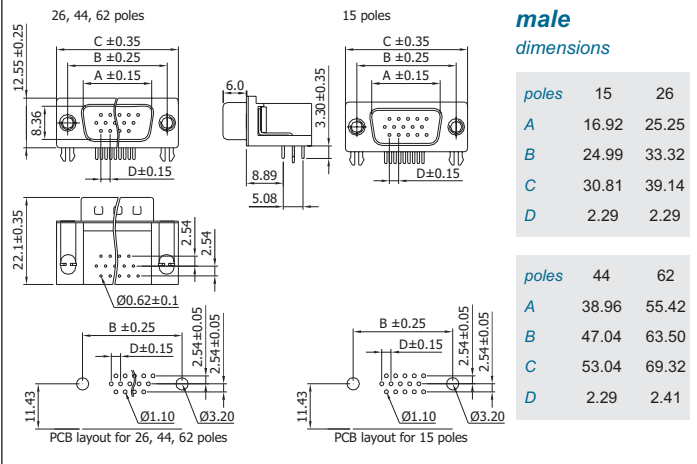

available pole no.: 15, 26, 44, 62

available pole no.: 15, 26, 44, 62

D-Sub

technical data

contact material : copper alloy
 insulator : PBT
 flammability : UL 94V-0
 shell : iron with tin plated

dielectric strength : 1000V AC
 current rating : 5A
 insulation resistance : 5000 Meg Ohm min.
 contact resistance : 30 milli Ohm max

operating temperature : -40°C to +85°C

plating

00= flash gold
 30= selective gold 0.75µm
 60= selective flash gold


mounting part for PCB

please see page G13

mounting part for counterpart

please see page G13

order code

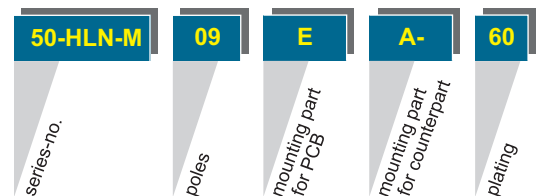

other materials are available, please contact us

Shown tolerances may differ to final product. Currently valid drawings are only on www.gsn.sg. In case of any doubt, please contact GSN.