

**SAFETY ISOLATING TRANSFORMER**

POWER : 2.8VA  
 INPUT VOLTAGE : 230V  
 FREQUENCY : 50/60Hz  
 NOMINAL OUTPUT VOLTAGE : 2x9V~

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER  
 IP00  
 UL94V0  
 OPERATING TEMPERATURE : -25°C to 40°C  
 STORAGE TEMPERATURE : -25°C to 85°C  
 INSULATION CLASS (IEC85) : B  
 INHERENT PROTECTION


**STANDARDS :**

- UL5085 (File E111078)
- CSA 22-2 (File E111078)
- VDE (File Ref:1398300)
- EN60950 (File Ref:1398300)
- EN61558-1 (File Ref:1398300)
- EN61558-2-6 (File Ref:1398300)
- CE

**mytra** 44704  
 E130x18  
 PRI: 1-5 230V~ 50/60Hz  
 SEC: 6-7 9V~ 1.4VA  
 SEC: 9-10 9V~ 1.4VA  

 In 4018  
 www.mytra.com

230V-50/60Hz

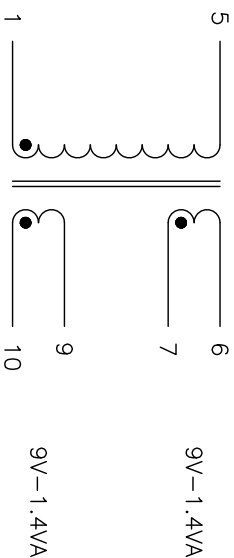

Finitions:		Tolérance générale:
Entonnoir:		General tolerance:

Ech:	1:1	Matière:	
Material:			
Dessiné par:	ROUSSEL.Ch	Date:	18/05/2004
Visé:	J.P.M.		

**DATA SHEET 44704**  
**E1 30X18**



22, Allée du Clos des Champs  
 Z.A. Les Portes de la Forêt  
 77090 COLEBIEN  
 Tél : 01-60-57-55-55  
 Fax : 01-60-17-12-00

**DS44704**

Rev	Date	Modification	Dessiné	Visé
A	21/6/16	Marking updated	SCOTT	J.P.M
B				
C				
D				