

Data sheet

734-102

**FEMALE PLUG 2 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**



Technical data

Package size 200 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	2
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	1.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Voltage CSA	300 V
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	1.6 g
Color	light grey
No. of connection Points	2
No. of potentials	2
Height	13.4 mm
Height	0.528 in
Width	9.2 mm
Width	0.362 in
Depth	18.6 mm
Depth	0.732 in
Strip length from	7 mm

Data sheet

734-102

**FEMALE PLUG 2 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

Strip length to	7 mm
Strip length	0.28 in

xxx-xxx/032-000	Strain relief plate 6 mm
-----------------	--------------------------

Data sheet

734-102

**FEMALE PLUG 2 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

Approval	Voltage	Current	Approval number	Notes
BV	250	10	11915/A0	
CCA	250	10	123898-02	
CCA	250	10	NL5641	
CSM	250	10	017956	
DEMKO	250	10	00-00103	
DNV	250	10	E-6997	
GL	250	10	17296-00HH	
KEMA	250	10	2077592.02	
LR	250	10	96/20035	
RMR	250	10	99.00007.250	
RosTesT	250	10	B09523	

Data sheet

734-102

**FEMALE PLUG 2 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

Accessories


Item number

OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	734-230
SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SNAP-ON TYPE RELIEF HOUSING SUITABLE FOR PIN SPACING 3.5 MM / 0.138 IN	734-602
STRAIN RELIEF PLATE FOR SERIES 734	734-127

Data sheet

734-102

FEMALE PLUG 2 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP CONNECTION

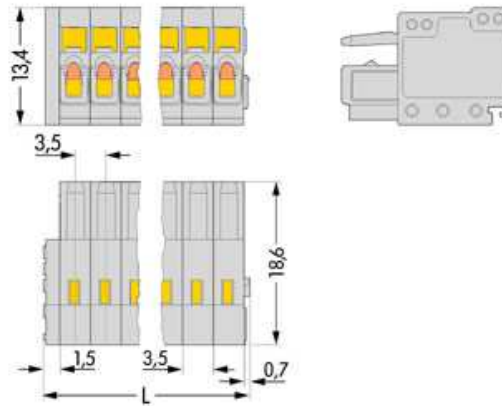

Data sheet

734-102

**FEMALE PLUG 2 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

$L = (\text{No. of poles} \times \text{pin spacing}) + 2,2 \text{ mm}$