

SMD Modular Jacks / Modular Plugs

F4477 = Product group; Product group discount F 44 7_

SMD Modular Jacks Angled Series: MOD_SMD

Technical Specifications

Housing: Glass-filled Nylon
 Contacts: Phosphor Bronze
 Contact Surface: 6µ" Gold
 Temperature Range: -40...+125°C
 Rated Current: 1,5A
 Operating Voltage: 125V AC

Dimensions



Part Nr.	A	B	C	D
	[mm]	[mm]	[mm]	[mm]
MOD6SMD	13,20	16,95	10,35	6,35
MOD8SMD	15,10	18,98	12,38	8,89

Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Various

Part Nr.	Part description
MOD6SMD	SMD Modular-Jack 90° 6-Pole
MOD8SMD	SMD Modular-Jack 90° 8-Pole

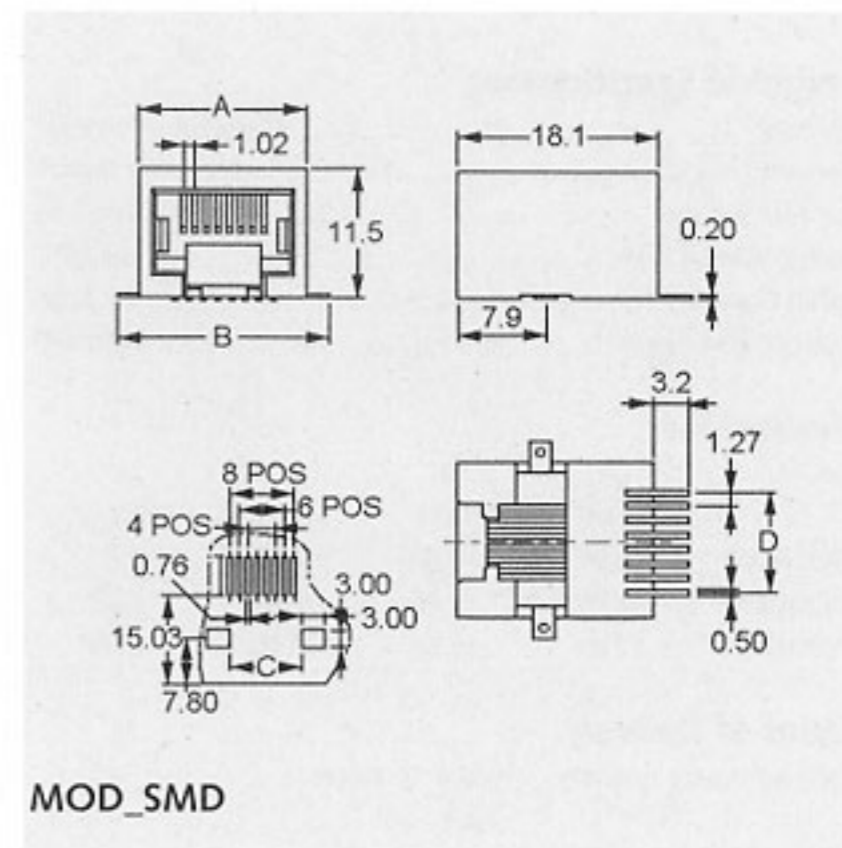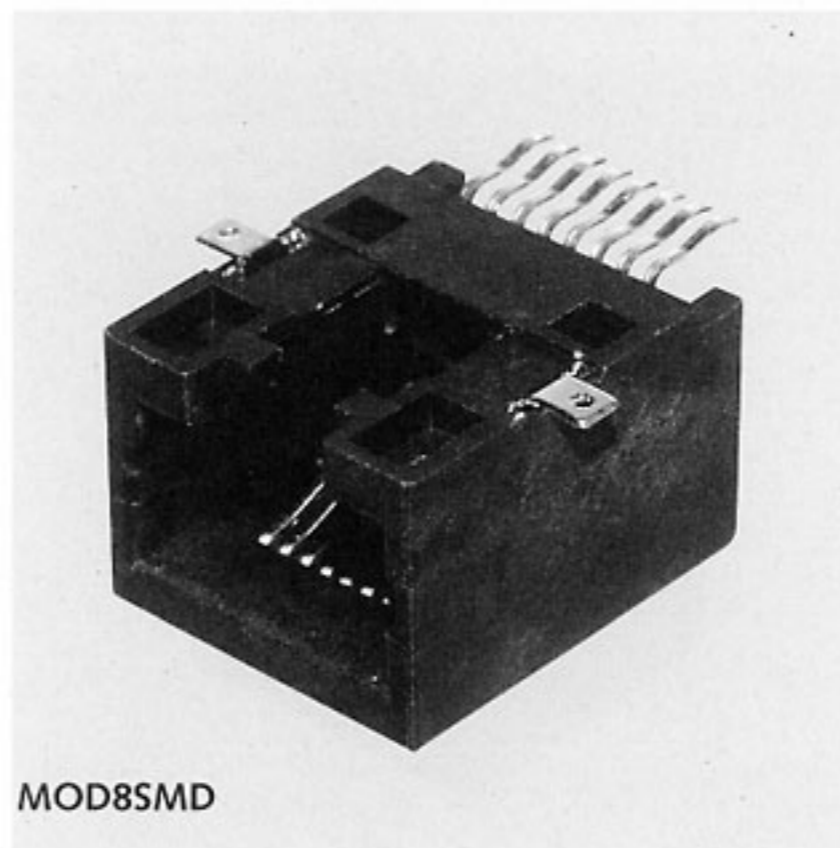

F4479 = Product group; Product group discount F 44 7_

Modular Plugs For Crimping Series: TM_C15

Features

- Made of clear-glass thermoplastic, self-extinguishing
- To assemble telephone connection lines

Technical Specifications

Part Nr.	Pin	Contacts
TM4P4C15	4	4
TM6P4C15	6	4
TM6P6C15	6	6
TM8P8C15	8	8

Note

- You will find suitable crimping tools for telephone modular plugs in product group T4631 in our red "Components and Devices" catalogue.
- You will find suitable cable TFL_SW in product group G1631

Terms of Delivery

Minimum order quantity: 1 PKU = 100 pieces

Manufacturer: Various

Part Nr.	Part description
TM4P4C15	Modular Plug 4P4C
TM6P4C15	Modular Plug 6P4C
TM6P6C15	Modular Plug 6P6C
TM8P8C15	Modular Plug 8P8C

