


FEMALE HEADERS


Female header

Technical data:

Insulating material:	High temp. Thermoplast UL 94V-0
Contact material:	Copper Alloy
Rated current:	1,5 Amp.
Rated voltage:	100 V _{RMS} /150 V _{DC}
Withstand voltage:	min. 500 V _{RMS}
Operating temperature:	-40°C to +105°C

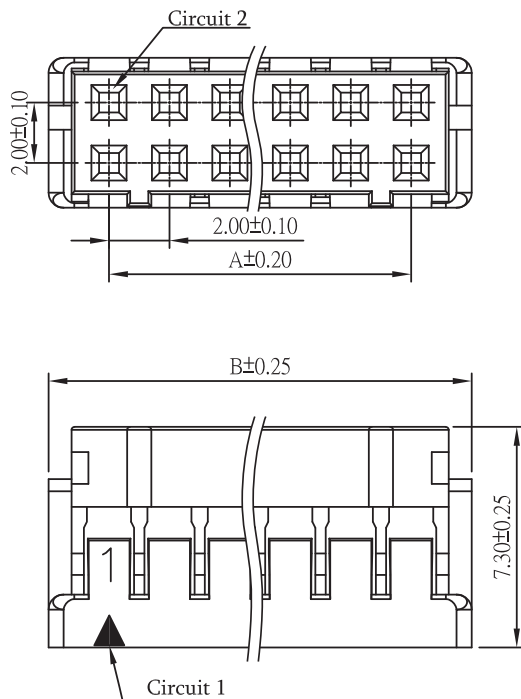

Pincount	Dimensions	
	A	B
004	2.00	6.00
006	4.00	8.00
008	6.00	10.00
010	8.00	12.00
012	10.00	14.00
014	12.00	16.00
016	14.00	18.00
018	16.00	20.00
020	18.00	22.00
022	20.00	24.00
024	22.00	26.00
026	24.00	28.00
028	26.00	30.00
030	28.00	32.00
032	30.00	34.00
034	32.00	36.00
036	34.00	38.00
038	36.00	40.00
040	38.00	42.00

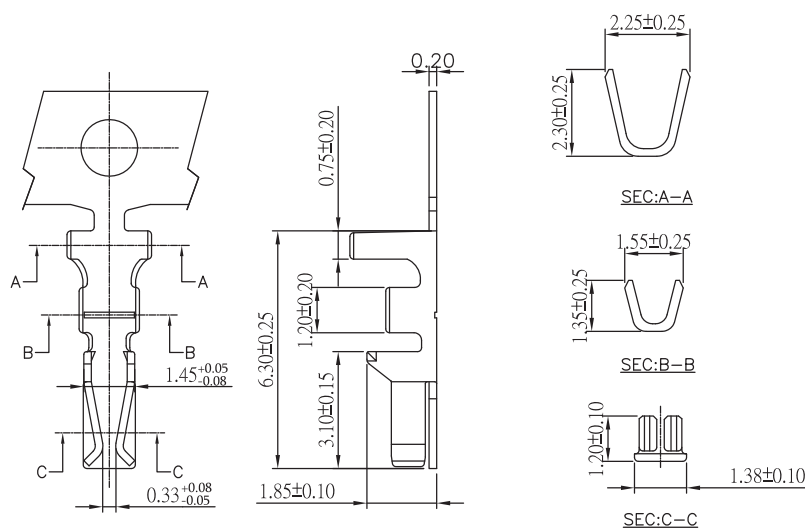

Please order separately:

Crimpcontact
CC2-22/30-TT-RL

Plating: Tin

Packsize: 10.000 per Reel

AWG: 22 - 30

Pincount: see table

Order code:

906-2-XXX-X-BS0A10