







SAFETY ISOLATING TRANSFORMER

POWER : 2.8VA
 INPUT VOLTAGE : 230V
 FREQUENCY : 50/60Hz
 NOMINAL OUTPUT VOLTAGE : 12V~

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER
 IP00
 UL94V0
 OPERATING TEMPERATURE : -25°C to 40°C
 STORAGE TEMPERATURE : -25°C to 85°C
 INSULATION CLASS (IEC85) : B
 INHERENT PROTECTION

STANDARDS :

- UL5085 (File E111078)
- CSA 22-2 (File E111078)
- VDE (File Ref:1398300)
- EN60950 (File Ref:1398300)
- EN61558-1 (File Ref:1398300)
- EN61558-2-6 (File Ref:1398300)
- CE

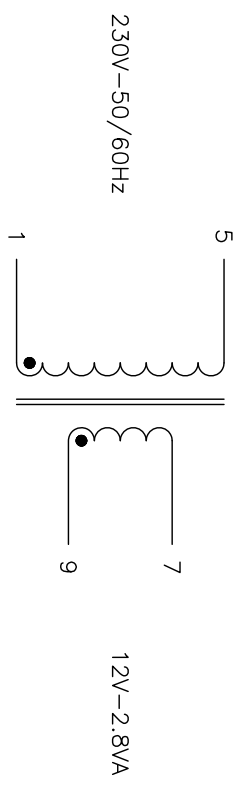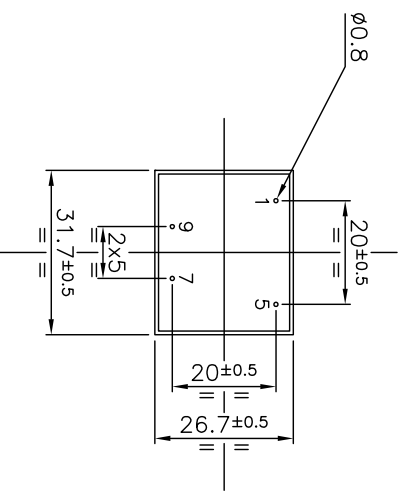

Entonci:		Tolérance générale:	
Entonci:		General tolerance:	
Ech:	1:1		
Matière:			
Matériau:			
Dessiné par:	ROUSSEL.Ch	Date:	18/05/2004
Vise:		J.P.M.	

DATA SHEET 44699
 EI 30X18



22, Allée du Clos des Champs
 Z.A. Les Portes de la Forêt
 77090 COLLEBIEN
 Tél : 01-60-37-55-55
 Fax : 01-60-17-12-00

DS44699

Rev	Date	Modification	Dessiné	Visé
D				
C				
B	18/4/16	Marking updated	SCOTT	J.P.M
A	16/10/14	Marking updated	SCOTT	J.P.M