Female Header with Turned Contacts 1,27 mm

Series **204**

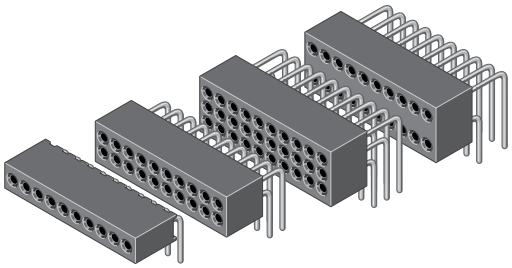

Rated current	1,0 A
Rated voltage	100 VRMS / VDC
Withstand voltage	500 VRMS for one minute
Material contact	Copper alloy
Material clip	Berylium copper
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch **1,27**

termination

mating pin size **ø 0,38-0,50**

max. pincount **050/100/150**

Product group **4**

Variation		PCB Layout
nx1,27+0,41; (n-1)x1,27; 2,20; 1,27; 4,10; 3,00; ø0,44; 5,30	**1**	(n-1)x1,27; 1,27; ø0,65
(n/2)x1,27+0,41; (n/2-1)x1,27; 1,27; 3,25; 1,27; 3,8; 3,30; ø0,44; 1,27; 5,00	**2**	(n/2-1)x1,27; 1,27; 1,27; ø0,65
(n/3)x1,27+0,41; (n/3-1)x1,27; 1,27; 4,42; 1,27; 1,27; 3,8; 3,30; ø0,44; 1,27; 1,27; 5,00	**3**	(n/3-1)x1,27; 1,27; 1,27; ø0,65; 1,27
(n/2)x1,27+0,41; (n/2-1)x1,27; 2,54; 4,42; 1,27; 3,8; 3,30; ø0,44; 2,54; 5,00	**4**	(n/2-1)x1,27; 1,27; 2,54; ø0,65

Clip style:
H = 3 finger clip

Plating:
T = Sn
F = Au
H = Au 0,75 µ

* No. of contacts:
Variation 1 = 002 - 050
Variation 2 = 004 - 100
Variation 3 = 009 - 150
Variation 4 = 004 - 100

Order code:	204	-	?	-	?	?	?	-	0	-	H	T	?	-	L	S	0
			Variation (1,2,3,4)		No. of contacts * (002,... - 150)						Clip style	Plating contact	Plating clip (F,H)				

mpe GARRY

www.mpe-connector.de

MPE-Garry GmbH • Schäfflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de