

Pin Headers / High-Quality Pin Headers

F2323 = Product group; Product group discount F 23 2_

Part Nr.	Part description
WSL072Z	Pin Header 72-Pole Straight 1R Sn
WSL080Z	Pin Header 80-Pole Straight 1R Sn

Pin Headers
 Double Row, Straight
 Pitch: 2,54mm
 Series: WSL

Features



- Tin-plated version
- Arbitrary mounting

Technical Specifications

Insulation Shell:Polyamide, UL94V-0
 Contact Material:Brass
 Contact Surface:Tin
 Rated Current:1A
 Temperature Range:-55...+105°C
 Dielectric Strength (1 Min.):1000V AC
 Insulation Resistance (500V DC):1000MΩ

Dimensions

A:2,54mm x Number of Contact Pins
 B:2,54mm x (Number of Contact Pins - 1)
 Pin Cross Section, Max.:0,64x0,64mm

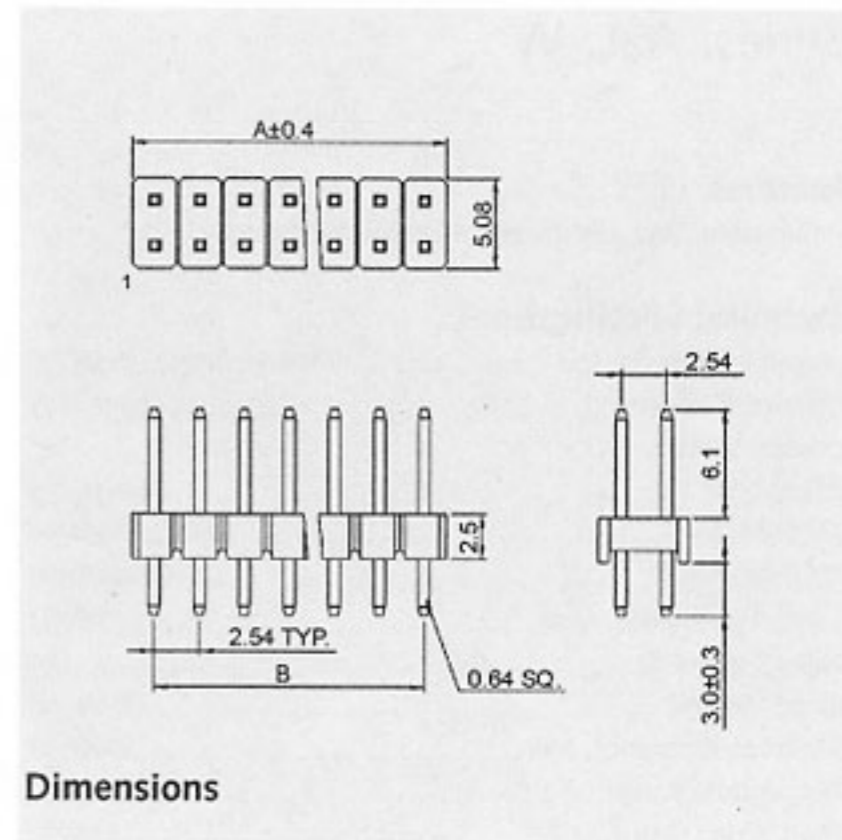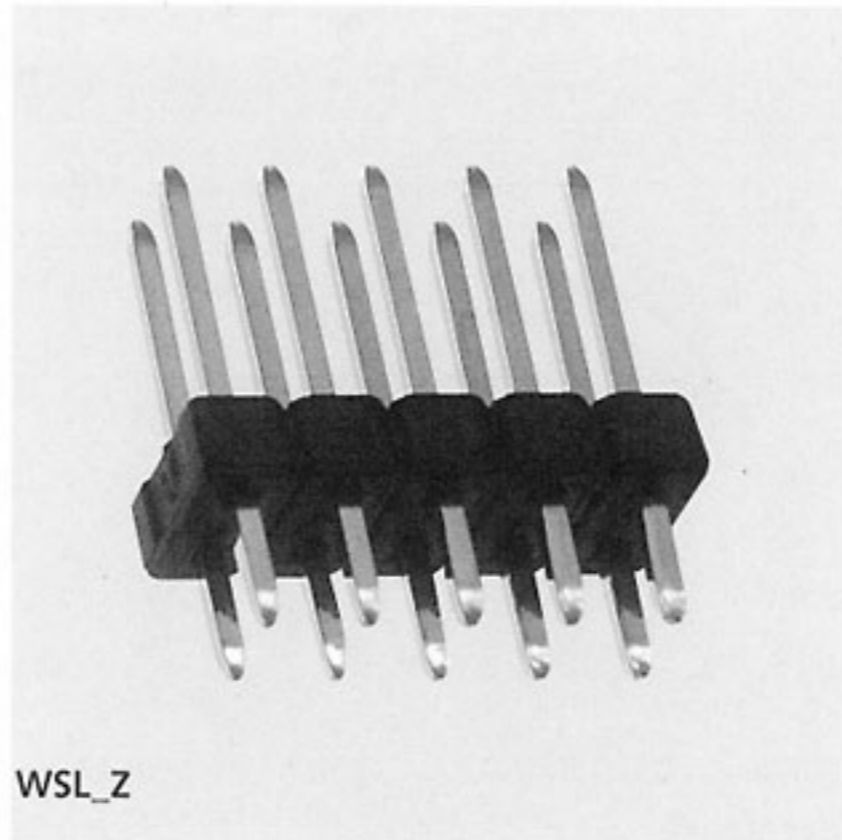

Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces

Manufacturer: Various

F2325 = Product group; Product group discount F 23 2_

Part Nr.	Part description
ASL100ZW	Pin Header 100-Pole Angled 2R Sn
ASL100GW	Pin Header 100-Pole Angled 2R Au



MPE GARRY High-Quality Pin Headers
 Double Row, Angled
 Pitch: 2,54mm
 Series: ASL_W

Features

- Tin-plated or gold-plated design
- Arbitrary mounting

Technical Specifications

Insulating Shell:Thermoplastic, UL94V-0
 Contact Material (DIN17660):Copper alloy
 Contact Surface:
 ASL_ZW:Tin-plated
 ASL_GW:Gold-plated
 Insulation Resistance, Max.:40mΩ
 Rated Current:3A
 Rated Voltage:250V AC
 Insulation Resistance, Min.:500MΩ
 Temperature Range:-40...+105°C
 Short Term (10s):+260°C
 Solderability:IEC 68-2-20 Tb

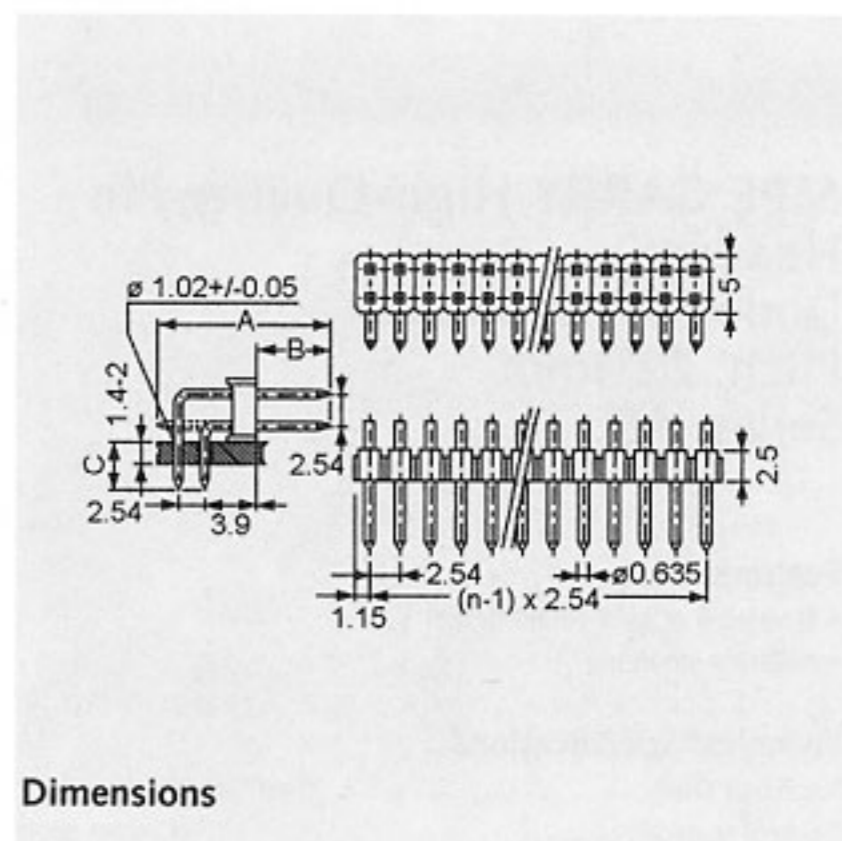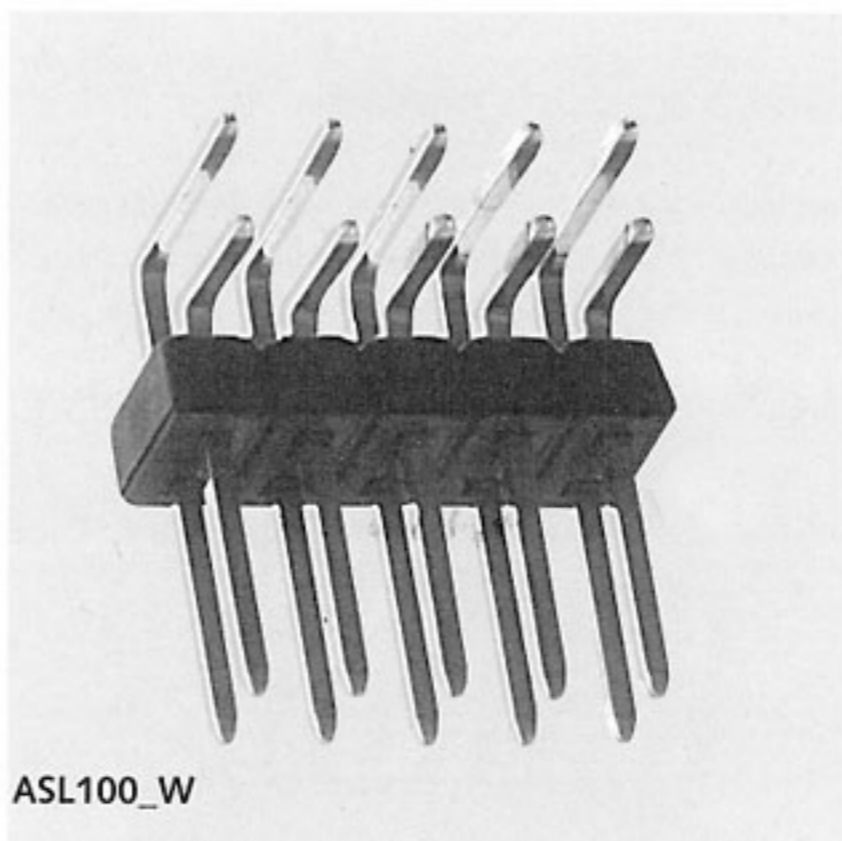

Dimensions

Pin Length, Complete¹⁾:14,7mm
 Pin Length, Plug-in Area (B):7,0mm
 Pin Length, Soldered Area (C):3,3mm
 Pin Cross Section0,635x0,635mm

¹⁾ Full Length of Short Contacts

Terms of Delivery

Minimum order quantity: 1 PKU = 10 pieces

Manufacturer:

<http://www.mpegarry.de>