


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, designer, sole, manufacturing and reproduction rights thereto.

REVISIONS		DATE	APPROVED
REV.	DESCRIPTIONS		
-	Released on ECN #1091	11/15/00	M. A.

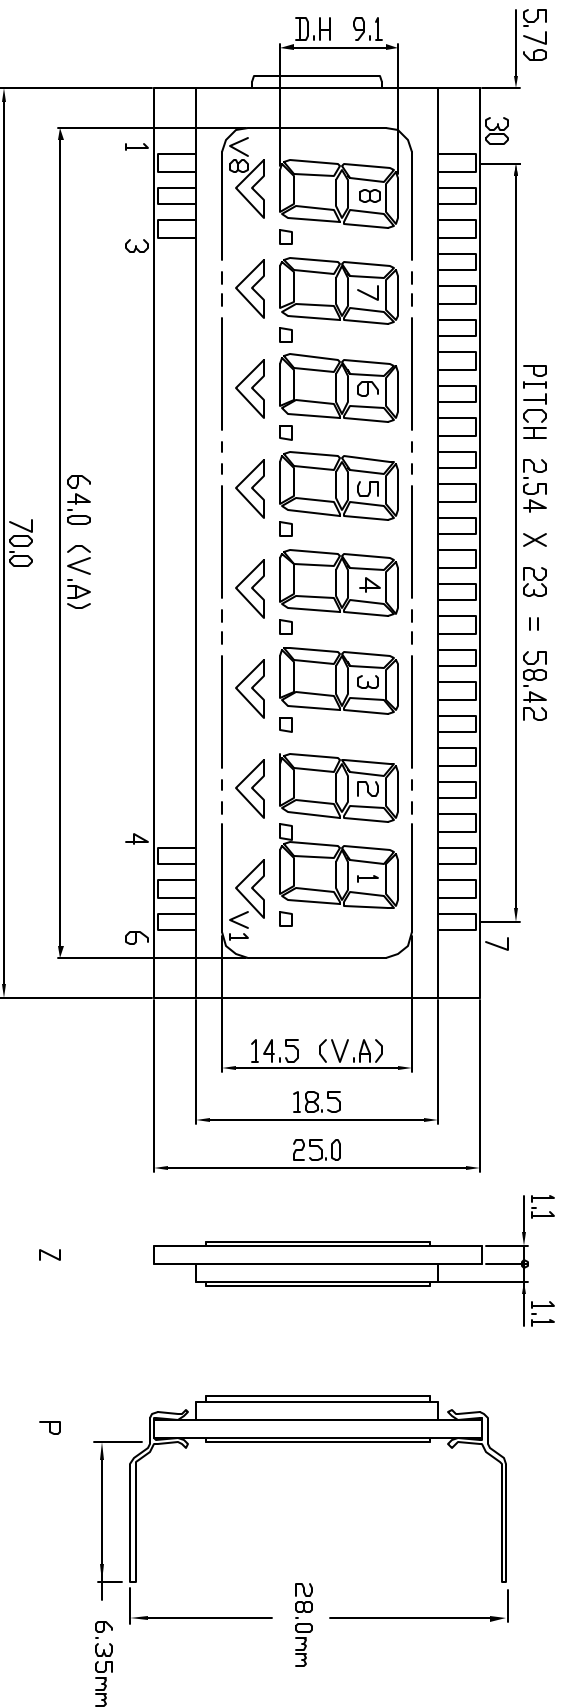


Pin No.	COM1	COM2	COM3	Pin No.	COM1	COM2	COM3	Pin No.	COM1	COM2	COM3
1	COM1			11	2a	29	2d	21	5f	5e	v5
2		COM2		12	2f	2e	v2	22	6b	6c	6DP
3			COM3	13	3b	3c	3DP	23	6a	6g	6d
4				14	3a	3g	3d	24	6f	6e	v6
5		COM2		15	3f	3e	v3	25	7b	7c	7DP
6	COM1			16	4b	4c	4DP	26	7a	7g	7d
7	1b	1c	1DP	17	4a	4g	4d	27	7f	7e	v7
8	1a	1g	1d	18	4f	4e	v4	28	8b	8c	8DP
9	1f	1e	v1	19	5b	5c	5DP	29	8a	8g	8d
10	2b	2c	2DP	20	5a	5g	5d	30	8f	8e	v8

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	1/3
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-854-XZ-W	ZEBRA TYPE	DG-854-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.			



APPROVALS	DATE	TITLE	DWG. NO.
DRAWN		DENSITRON TECHNOLOGIES PLC	DG-854
CHECKED		LCD SEGMENTED GLASS	
ISSUED			

Unless otherwise specified:	Dimensions are in mm
Tolerances are:	
X = ± 3	
X = ± 0.5	
.XX = ± 0.05	
PAGE CODE #DIVSS2	