
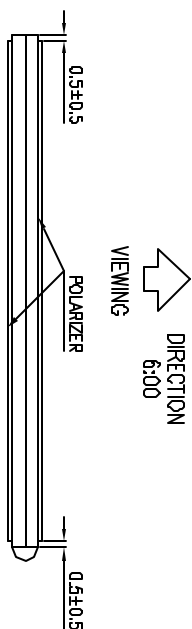
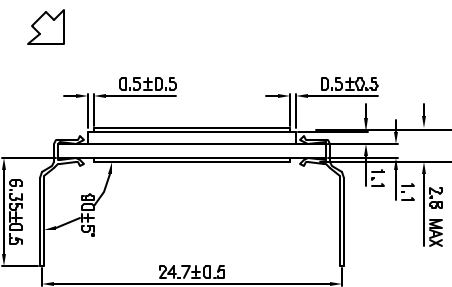


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patents, proprietary, design, use, sale, manufacturing and reproduction rights therein.

REVISIONS		DATE	APPROVED
REV.	DESCRIPTIONS		
A	Released on ECN #1241	01/02/02	M. A.

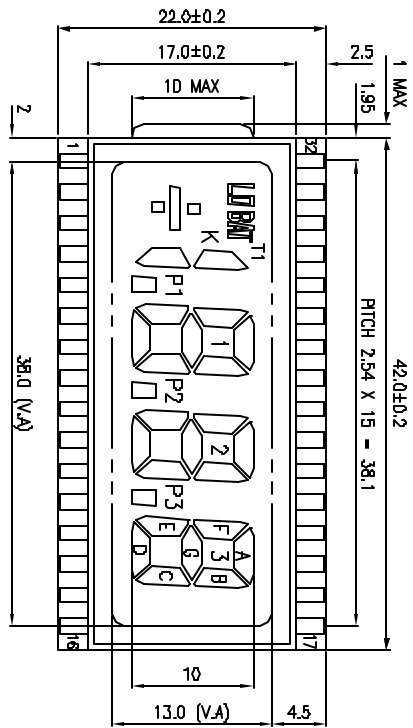

PINOUT:


Pin No.	Com	Pin No.	Com	Pin No.	Com	Pin No.	Com	Pin No.	Seg.
1	CDM	11	2C	21	2A	31	1		
2	-	12	P3	22	2F	32	CDM		
3	K	13	3E	23	2G				
4	P1	14	3D	24	1B				
5	IE	15	3C	25	1A				
6	1D	16	3B	26	1F				
7	1C	17	3A	27	1G				
8	P2	18	3F	28	/				
9	2E	19	3G	29	/				
10	2D	20	2B	30	T1				

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-011-XZ-W	ZEBRA TYPE	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.		



Unless otherwise specified:
 Dimensions are mm
 Tolerances are:
 X = ± 0.3
 .X = ± 0.05
 .XX = ± 0.05
 CAGE CODE #DWSS2

APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

DENSITRON TECHNOLOGIES PLC.	
TITLE LCD SEGMENTED GLASS	
DWG. NO. DG-011	SHEET 1 OF 1