


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, use, sale, manufacturing and reproduction rights thereto.


REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
A	Released on ECN #1241	01/03/02	M. A.

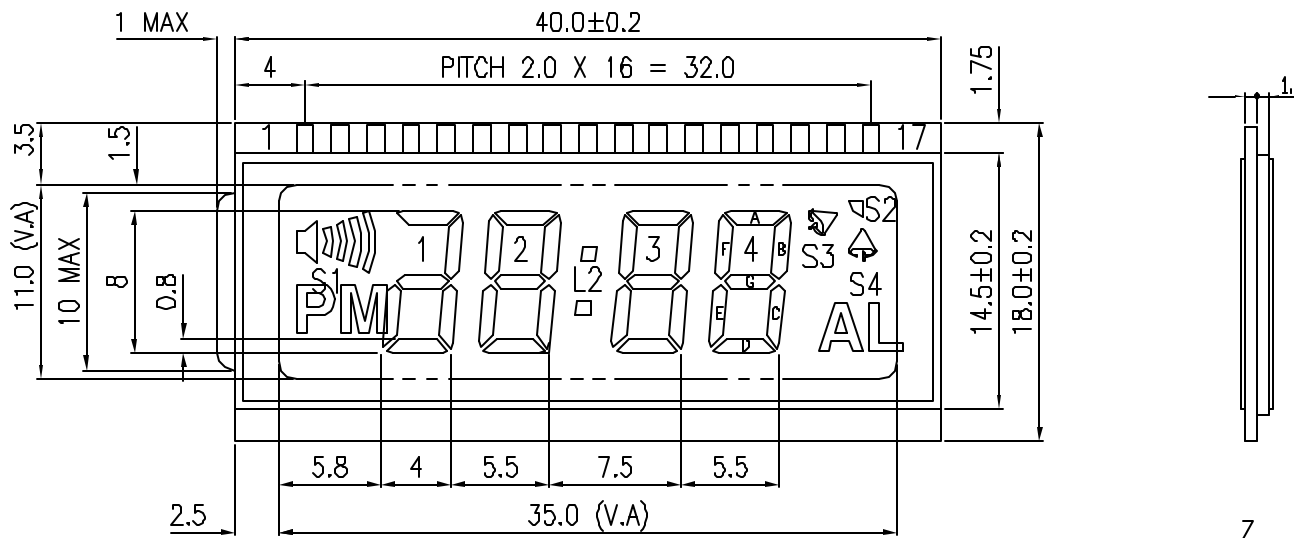

PINOUT:

Pin No.	COM1	COM2	Pin No.	COM1	COM2
1		COM2	10	1d	L2
2	S2	AL	11	2e	2f
3	S3	S4	12	2g	2a.d.
4	PM	S1	13	2c	2b
5	4c	4a.g.e.d.	14	1e	1f
6	3d	4b	15	1g	1a
7	3e	3f	16	1c	1b
8	3g	3a	17	COM1	
9	3c	3b			




Specifications:

CONNECTION TYPE	Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-022-XZ-W	ZEBRA TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp	



Unless otherwise specified: Dimensions are mm Tolerances are: .X = ± 3 .X = ± 0.5 .XX = ± 0.05 CAGE CODE #DWS52	APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
	DRAWN			TITLE LCD SEGMENTED GLASS
	CHECKED			DWG. NO. DG-022
	ISSUED			SHEET 1 OF 1