


The information disclosed herein was originated by and is the property of Densitron Technologies, Densitron Technologies reserves all patent, proprietary, design, use, sale, manufacturing and reproduction rights thereto.

REVISIONS		DATE	APPROVED
REV.	DESCRIPTIONS		
-	Released on ECN #1090	11/13/00	M. A.

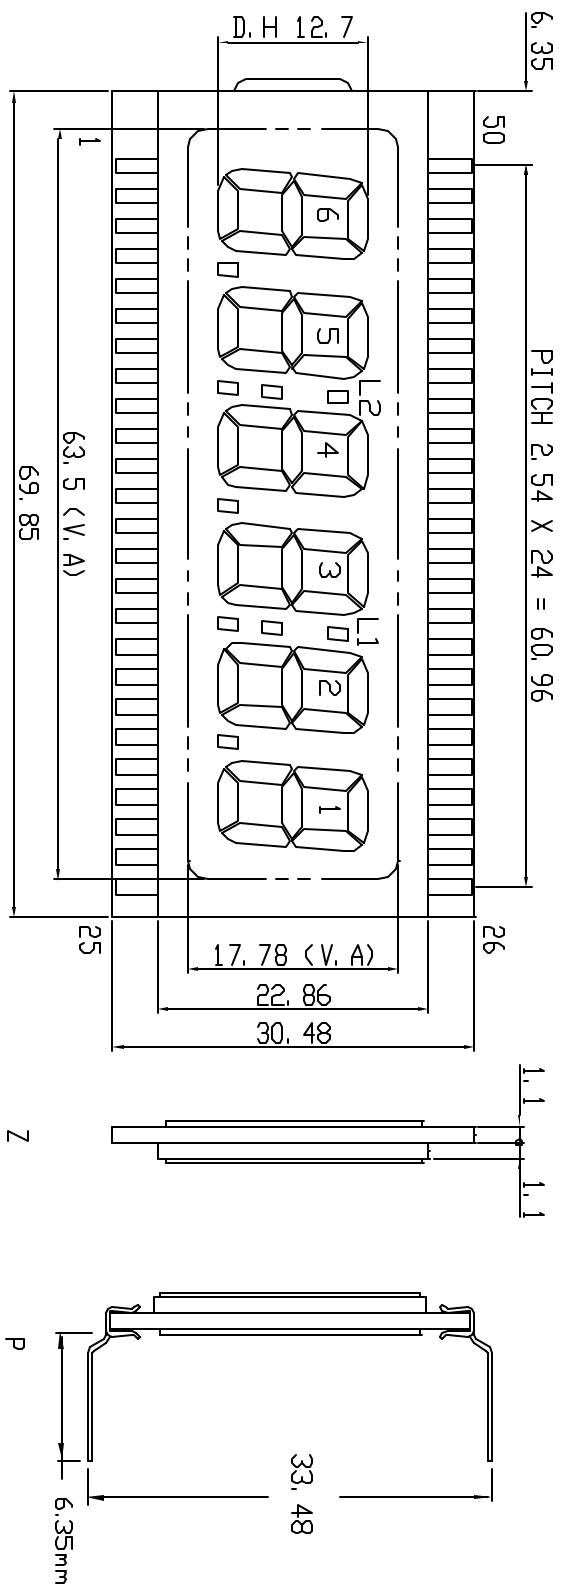

PINOUT:


Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	CDM	11	4d	21	2DP	31	2F	41	4g
2	6e	12	4c	22	1e	32	2g	42	L2
3	6d	13	4DP	23	1d	33	L1	43	5b
4	6c	14	3e	24	1c	34	3b	44	5a
5	6DP	15	3d	25	1b	35	3a	45	5f
6	5e	16	3c	26	1a	36	3f	46	5g
7	5d	17	3DP	27	1f	37	3g	47	6b
8	5c	18	2e	28	1g	38	4b	48	6a
9	5DP	19	2d	29	2b	39	4a	49	6f
10	4e	20	2c	30	2a	40	4f	50	6g

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-271204-XZ-W	ZEBRA TYPE	DG-271204-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp			



Unless otherwise specified, dimensions are in mm. Tolerances are:	APPROVALS	DATE									
X = ± 0.3	DRAWN										
.X = ± 0.5	CHECKED										
.XX = ± 0.05	ISSUED										
CAGE CODE #DWSS2											
<table border="1"> <thead> <tr> <th>TITLE</th> <th>DWG. NO.</th> <th>DG-271204</th> </tr> </thead> <tbody> <tr> <td>DENSITRON TECHNOLOGIES PLC,</td> <td></td> <td></td> </tr> <tr> <td>LCD SEGMENTED GLASS</td> <td></td> <td></td> </tr> </tbody> </table>			TITLE	DWG. NO.	DG-271204	DENSITRON TECHNOLOGIES PLC,			LCD SEGMENTED GLASS		
TITLE	DWG. NO.	DG-271204									
DENSITRON TECHNOLOGIES PLC,											
LCD SEGMENTED GLASS											
SHEET 1 OF 1											