


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sales, manufacturing and reproduction rights thereto.

REVISIONS		REV.	DESCRIPTIONS	DATE	APPROVED
A	Released on ECN #1234			01/03/02	M. A.

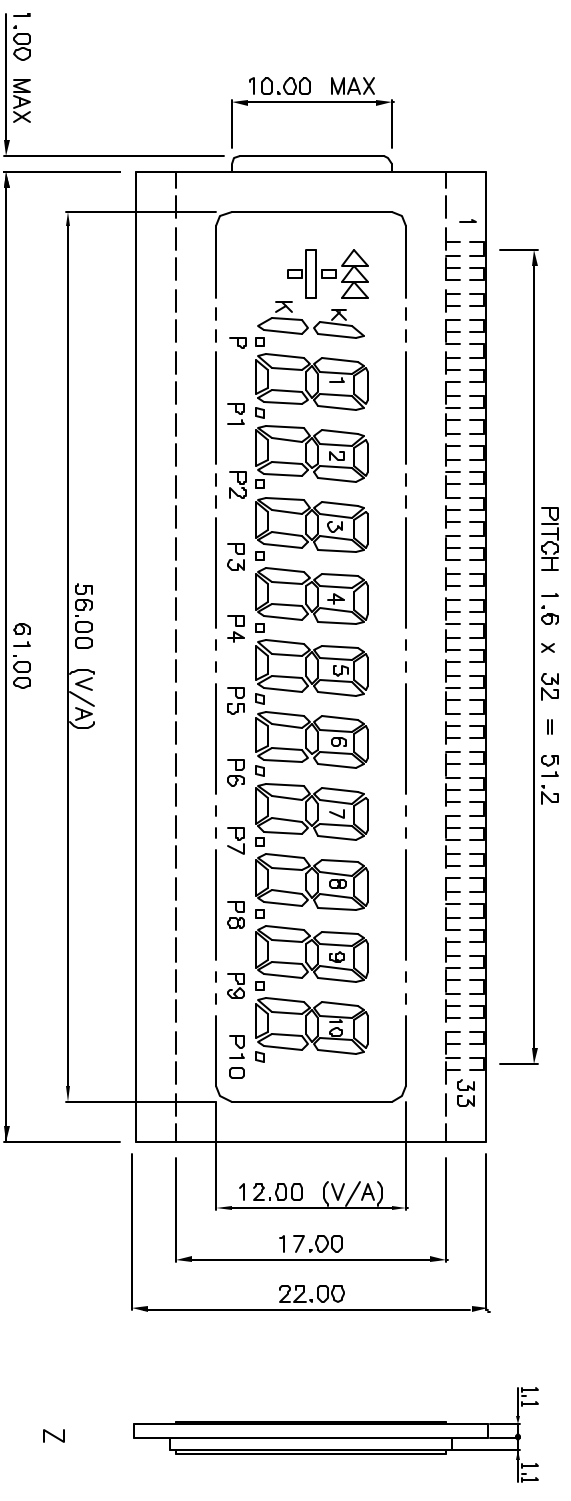

Pin No.	CDM1	CDM2	CDM3	Pin No.	CDM1	CDM2	CDM3	Pin No.	CDM1	CDM2	CDM3
1	10f	10e	K	12	7b	7c	7DP	23	3a	3g	3d
2	10a	10g	10d	13	6f	6e	6DP	24	3b	3c	3DP
3	10b	10c	10DP	14	6a	6g	6d	25	2f	2e	NC
4	9f	9e	11DP	15	6b	6c	6DP	26	2a	2g	2d
5	9a	9g	9d	16	5f	5e	5g	27	2b	2c	2DP
6	9b	9c	9DP	17	5a	5g	5d	28	1f	1e	NC
7	8f	8e	-	18	5b	5c	5DP	29	1a	1g	1d
8	8a	8g	8d	19	4f	4e	4c	30	1b	1c	1DP
9	8b	8c	8DP	20	4a	4g	4d	31			CDM3
10	7f	7e	-	21	4b	4c	4DP	32		CDM2	
11	7a	7g	7d	22	3f	3e	NC	33	CDM1		

Specifications:

CONNECTION TYPE	Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-053-XZ-W ZEBRA TYPE

Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.

Unless otherwise specified:		APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
Dimensions are mm		DRAWN		LCD SEGMENTED GLASS	
Tolerances are:				CHECKED	
X = ± 0.3					
.XX = ± 0.05					
CAGE CODE HWSS2		ISSUED			

