


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sale, manufacturing and reproduction rights thereto.

REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/15/00	M. A.

3.55 PITCH 1.7 X 37 = 62.9

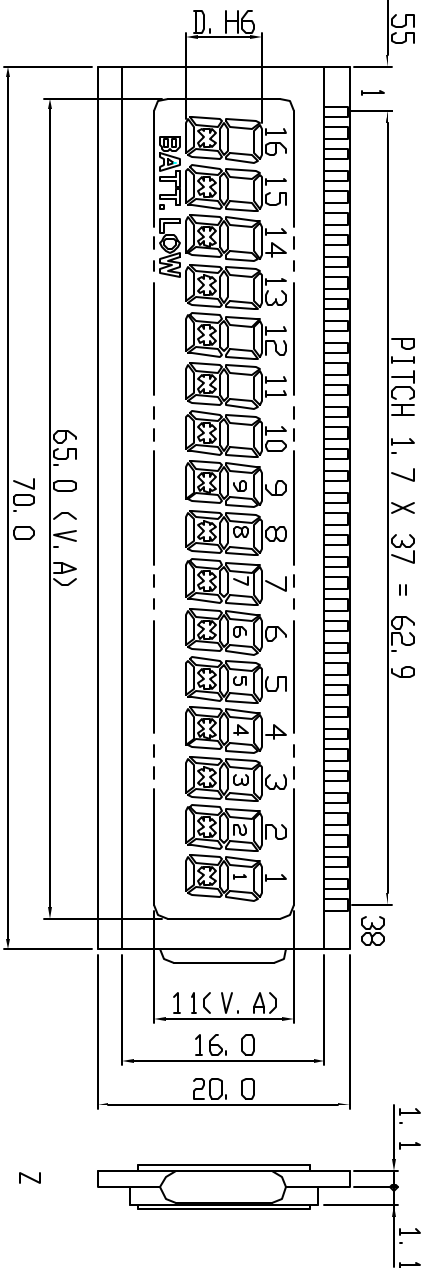

Specifications:


CONNECTION TYPE	Zebra
DUTY	1/4
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

PINOUT:

Pin No.	COM1	COM2	COM3	COM4	COM5	Pin No.	COM1	COM2	COM3	COM4	Pin No.	COM1	COM2	COM3	COM4
1						14	11a	11b	11c	11h	27	4f	4g	4e	4d
2					BATTLOW	15	10f	10g	10e	10d	28	4a	4b	4c	4h
3	16f	16g	16e	16d		16	10a	10b	10c	10h	29	3f	3g	3e	3d
4	16a	16b	16c	16h		17	9f	9g	9e	9d	30	3a	3b	3c	3h
5	15f	15g	15e	15d		18	9a	9b	9c	9h	31	2f	2g	2e	2d
6	15a	15b	15c	15h		19	8f	8g	8e	8d	32	2a	2b	2c	2h
7	14f	14g	14e	14d		20	8a	8b	8c	8h	33	1f	1g	1e	1d
8	14a	14b	14c	14h		21	7f	7g	7e	7d	34	1a	1b	1c	1h
9	13f	13g	13e	13d		22	7a	7b	7c	7h	35	COM1			
10	13a	13b	13c	13h		23	6f	6g	6e	6d	36		COM2		
11	12f	12g	12e	12d		24	6a	6b	6c	6h	37			COM3	
12	12a	12b	12c	12h		25	5f	5g	5e	5d	38				COM4
13	11f	11g	11e	11d		26	5a	5b	5c	5h					

Ordering Information

DG-4152-XZ-W	ZEBRA TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp	



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:	APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC
X = ± 0.3	DRAWN		
X = ± 0.05	CHECKED		TITLE
XX = ± 0.05	ISSUED		LCD SEGMENTED GLASS
CAGE CODE #DVS52			DWG. NO. DG-4152
			SHEET 1 OF 1