


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sales, manufacturing and reproduction rights thereto.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
A	Released on ECN #1234	12/20/01	M. A.

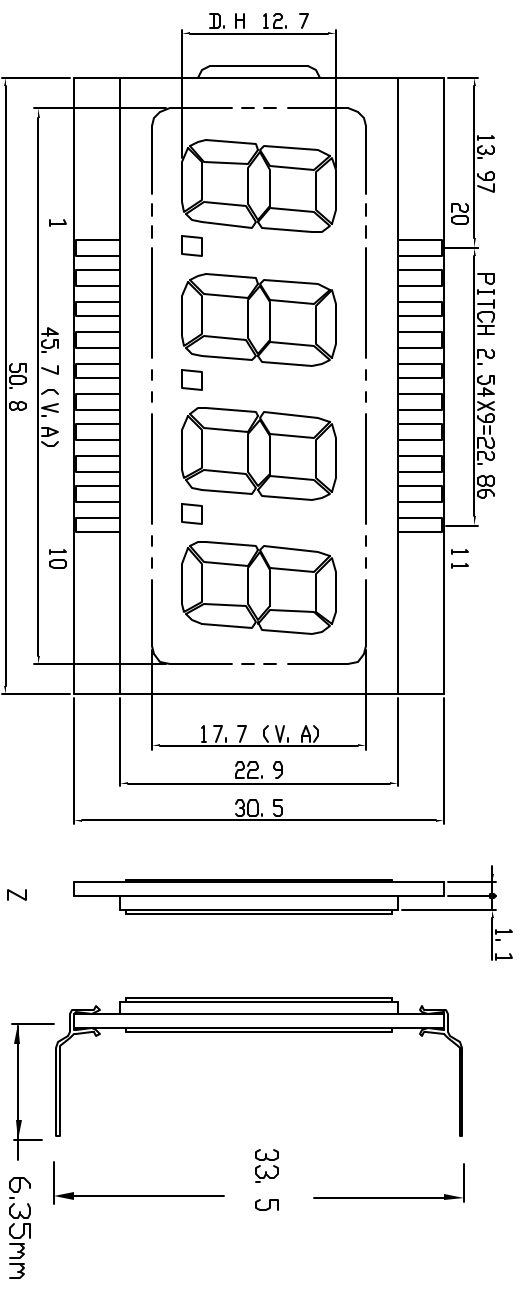

PINOUT:


Pin No.	COM1	COM2	COM3	Pin No.	COM1	COM2	COM3
1	NC	NC	NC	11	COM1		
2	NC	NC	NC	12	1a	1g	1d
3	NC	NC	NC	13	1f	1e	NC
4	4b	4c	4DP	14	2a	2g	2d
5	3b	3c	3DP	15	2f	2e	NC
6	2b	2c	2DP	16	3a	3g	3d
7	1b	1c	NC	17	3f	3e	NC
8			COM3	18	4a	4g	4d
9	NC	NC	NC	19	4f	4e	NC
10	NC	NC	NC	20		COM2	

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C

Ordering Information

DG-3141-XZ-W	ZEBRA TYPE	DG-3141-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, add '-W' for Wide Temp.			



Unless otherwise specified, dimensions are mm. Tolerances are: X = ± 0.3, .X = ± 0.5, .XX = ± 0.05. CAGE CODE HDWSS2

APPROVALS	DATE	TITLE	DWG. NO.	SHEET 1 OF 1
DRAWN		DENSITRON TECHNOLOGIES PLC.	DG-3141	
CHECKED		LCD SEGMENTED GLASS		
ISSUED				