


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sale, manufacturing and reproduction rights therein.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/15/00	M. A.

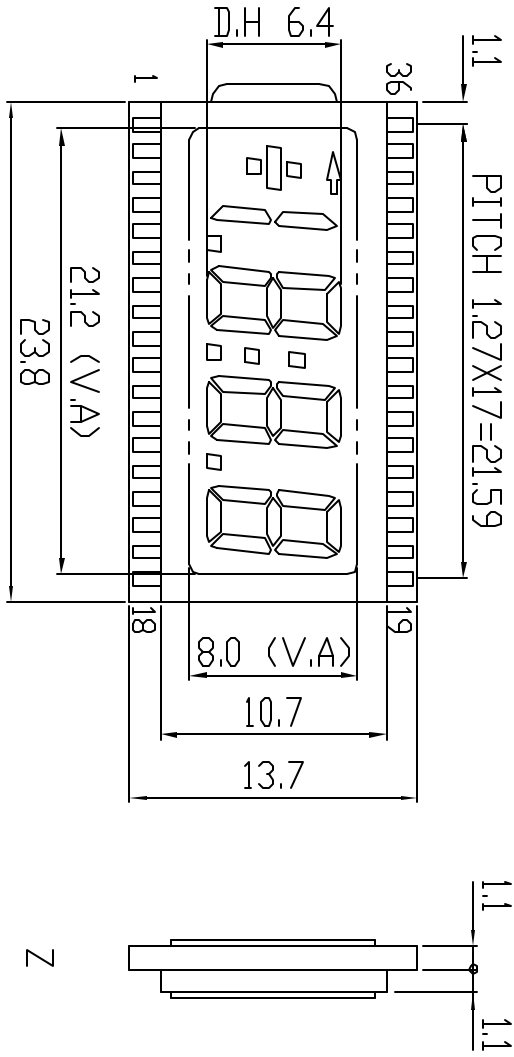


Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	CDM	10	3DP	19	1a	28	3a
2	-	11	2e	20	1f	29	3f
3	K	12	2d	21	1g	30	3g
4	NC	13	2c	22	2b	31	NC
5	NC	14	2DP	23	2a	32	NC
6	4DP	15	1e	24	2f	33	NC
7	3e	16	1d	25	2g	34	-
8	3d	17	1c	26	L	35	:
9	3c	18	1b	27	3b	36	CDM

Specifications:

CONNECTION TYPE	Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (*C)	0~50*C
STORAGE TEMPERATURE (*C)	-5~55*C

Ordering Information

DG-1100-XZ ZEBRA TYPE
 Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer.



Unless otherwise specified: Dimensions are in mm Tolerances are:		APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
X = ± 0.3		DRAWN		TITLE LCD SEGMENTED GLASS	
X = ± 0.5		CHECKED		DWG. NO. DG-1100	
XX = ± 0.05		ISSUED			SHEET 1 OF 1
CAGE CODE #DVSS2					