


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, and manufacturing and reproduction rights thereto.

REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/15/00	M. A.

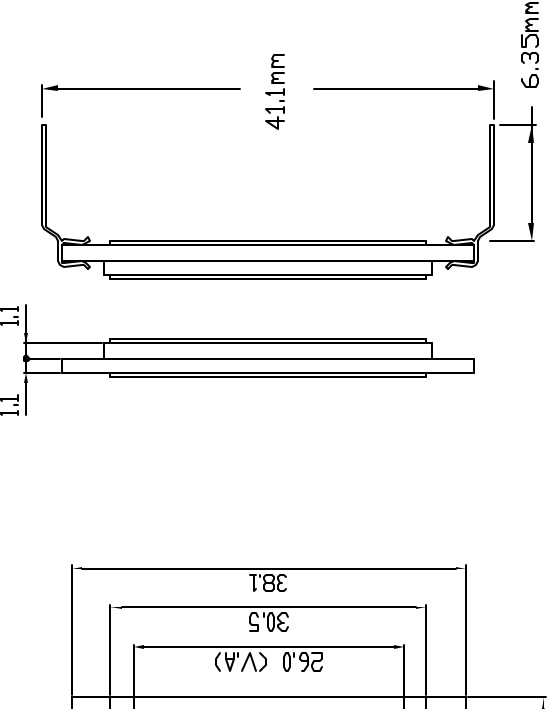

PINOUT:


Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	COM	11	3c	21	1a	31	3f
2	-	12	3DP	22	1f	32	3g
3	4br	13	2e	23	1g	33	NC
4	NC	14	2d	24	2b	34	NC
5	NC	15	2c	25	2a	35	NC
6	NC	16	2DP	26	2f	36	NC
7	NC	17	1e	27	2g	37	~
8	4DP	18	1d	28	L	38	▲
9	3e	19	1c	29	3b	39	·
10	3d	20	1b	30	3a	40	BAT

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-1099-XZ-W	ZEBRA TYPE	DG-1099-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.			



APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

TITLE	LCD SEGMENTED GLASS
DENSITRON TECHNOLOGIES PLC.	
DWG. NO.	DG-1099
SHEET 1 OF 1	