



The information disclosed herein was originated by and is the property of Denitron Technologies. Denitron Technologies reserves all patent, proprietary, design, use, sale, manufacturing and reproduction rights thereto.

REVISIONS		DATE	APPROVED
REV.	DESCRIPTIONS		
A	Released on Ecn #1234	01/03/02	M.A.

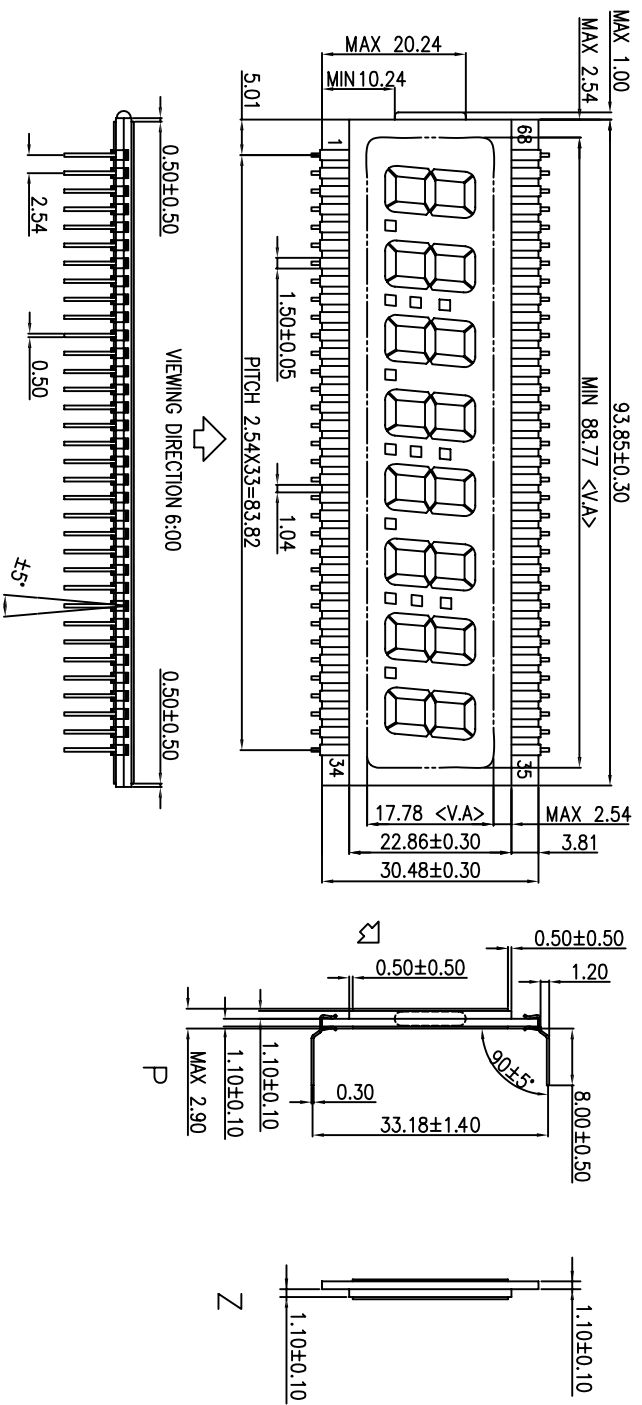

- NOTE:
1. TN TYPE
 2. DRIVING METHOD: STATIC
 3. OPERATING VOLTAGE: 5.0 V
 4. OPERATING TEMP: -20 ~ 80°C
 5. STORAGE TEMP: -25 ~ 85°C
 6. VIEWING DIRECTION: 6:00
 7. POLARIZER MODE: TRANSMISSIVE POSITIVE
 8. CONNECTION: PIN TYPE
 9. DIMENSIONS ARE IN MILLIMETERS AND UNLESS OTHERWISE NOTED ARE ±0.20MM

Ordering Information

DG-928-XZ-W	ZEBRA TYPE	DG-928-XP-W	PIN TYPE
Replace the "X" in the above part number with "R" for reflective polarizer, "B" for Transmissive Polarizer, or "F" for Transmissive Polarizer, add -W for Wide Temp.			

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	
COM	8E	8D	8C	80P	7E	7D	7C	70P	6E	6D	6C	60P	5E	5D	5C	50P	4E	4D	4C	40P	3E	3D	3C	30P	2E	2D	2C	20P	1E	1D	1C	1B		
35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	
COM	1A	1F	1G	2B	2A	2F	2G	13	3B	3A	3F	3G	4B	4A	4F	4G	12	5B	5A	5F	5G	6B	6A	6F	6G	13	7B	7A	7F	7G	8B	8A	8F	8G

Unless otherwise specified dimensions are mm, tolerances are:

X = ± 0.3

.X = ± 0.05

.XX = ± 0.05

DRAWN:		DATE	
CHECKED:		TITLE	
ISSUED:		DWG. NO.	
APPROVALS		REV. A	
DENSITRON TECHNOLOGIES PLC.		CAGE CODE #OWSS2	
LCD SEGMENTED GLASS		SHEET 1 OF 1	