


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sales, manufacturing and reproduction rights thereto.

REVISIONS		REV.	DESCRIPTIONS	DATE	APPROVED
A	Released on ECN #1234			01/03/02	M. A.

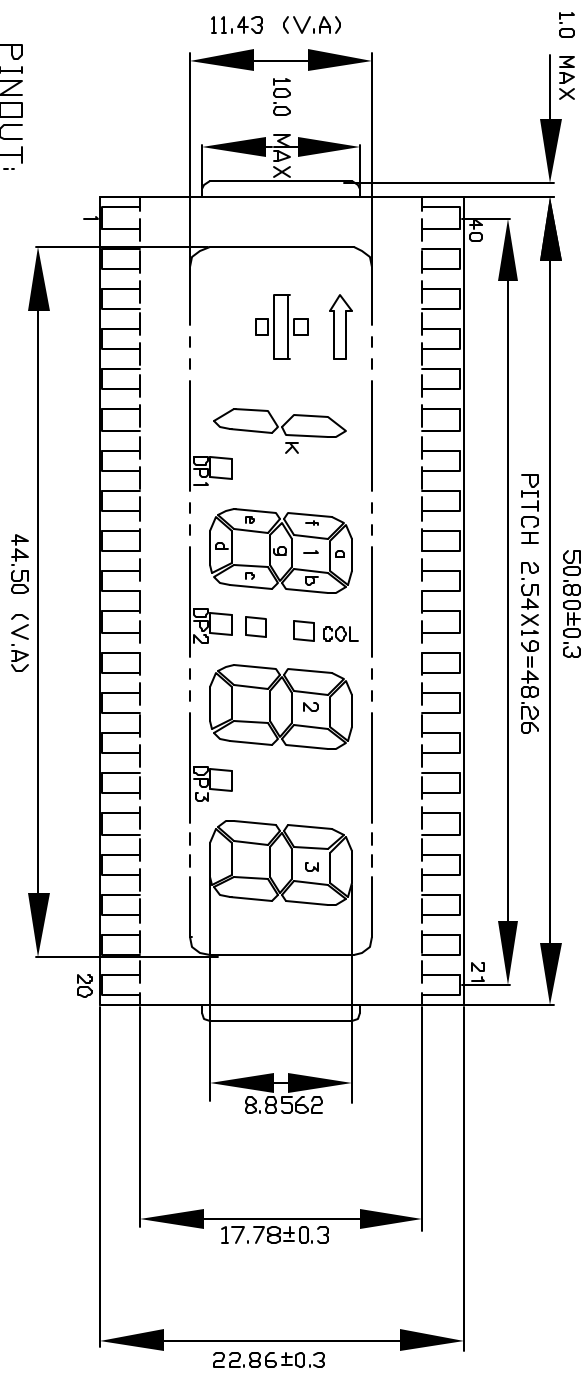

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	COM	11	3c	21	1a	31	3f
2	-	12	3DP	22	1f	32	3g
3	K	13	2e	23	1g	33	NC
4	NC	14	2d	24	2b	34	NC
5	NC	15	2c	25	2a	35	NC
6	NC	16	2DP	26	2f	36	NC
7	NC	17	1e	27	2g	37	NC
8	4DP	18	1d	28	L	38	←
9	3e	19	1c	29	3b	39	↑
10	3d	20	1b	30	3a	40	COM

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C

Ordering Information

DG-038-XZ-W	ZEBRA TYPE	DG-038-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.			

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:	APPROVALS	DATE	TITLE
X = ± 0.3	DRAWN		DENSITRON TECHNOLOGIES PLC.
.X = ± 0.5	CHECKED		LCD SEGMENTED GLASS
.XX = ± 0.05	ISSUED		DWG. NO. DG-038
CAGE CODE HWSS52			SHEET 1 OF 1

