

LIQUID CRYSTAL DISPLAY MODULE

Product Specification

CUSTOMER		
PRODUCT NUMBER	DET043QQNCRSS-1A	
CUSTOMER APPROVAL		Date

INTERNAL APPROVALS		
Product Mgr	Doc. Control	Electr. Eng
Elijah	Bazile	Luo
Ebo	Peter	Luo
03/01/12	03/01/12	03/01/12

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	1 / 24
------	--------

Contents

1. General Description and Features	4
1.1 Features	4
1.2 LCD Module	4
2. Mechanical Information	4
3. Electrical Specifications	5
3.1 Absolute Max. Ratings	5
3.2 Electrical Characteristics	5
3.3 AC Timing Characteristic of The LCD	6
3.4 Back-Light Unit.....	10
4. Optical Characteristics	11
4.1 Optical characteristic of the LCD	11
5. I/O Terminal	14
5.1 Pin Assignment	14
5.2 Block Diagram	16
5.3 Basic Display Color and Gray Scale.....	17
6. Touch Screen Panel Specifications	18
7. Reliability Condition	19
8. Dimensional Outlines	20
9. Incoming Inspection Standards	21
9.1 Inspection and Environment Conditions.....	21

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	3 / 24
------	--------

1. General Description and Features

89H\$(' E E B7RGG! %5 is a TM (Transmissive) type color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching devices. This model is composed of a TFT-LCD module, a driver circuit , a back-light unit and Touch panel. The resolution of a 4.3" contains 480xRGBx272 dots and can display up to 16.7M colors. The following table described the features of 89H\$(' E E B7FGG! %5.

1.1 Features

- Transmissive and back-light with 7th LEDs are available.
- TN (Twisted Nematic) mode.
- 8 Bits 8080 system interface
- RoHS Compliance

1.2 LCD Module

Item	Specification	Unit
Screen Size	4.3 inches	Diagonal
Display Resolution	480 (H) x 272 (V)	Pixel
Active Area	95.04 (H) x 53.856 (V)	mm
Display Mode	Normally white mode/ Transmissive/ Wide view	--
Pixel Arrangement	R,G,B Vertical Tripe	--
Surface Type(TSP)	Anti-glare	--
Pixel size	0.198 (H) x 0.198 (V)	mm
Display Color	16.7M Colors	--
Viewing Direction	6 o'clock (Gray Inversion)	--
Input Interface	8 Bits i8080 system interface	--
LCD controller	SSD1963	--

2. Mechanical Information

Item	Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	--	105.5	--	mm (1,2)
	Vertical (V)	--	67.2	--	mm (1,2)
	Thickness (T)	--	5.75	--	mm (1)
Weight	--	TBD	--	g	--

Note (1) Not include Component. Refer to the Outline Dimension Drawing as attached.

(2) Back-light unit is included.

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	4 / 24
------	--------

3. Electrical Specifications

3.1 Absolute Max. Ratings

3.1.1 Absolute Ratings of Environment

If the operating condition exceeds the following absolute maximum ratings, the TFT LCD module may be damaged permanently.

(Ta=25±2°C, V_{SS}=GND=0)

Item	Symbol	Min.	Max.	Unit	Note
Storage temperature	T _{STG}	-30	80	°C	(1)
Operating temperature	T _{OPR}	-20	70	°C	(1,2,3)

Note (1) 95 % RH Max. (40 °C ≥ Ta). Maximum wet-bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

Note (2) In case of below 0°, the response time of liquid crystal (LC) becomes slower and the color of panel becomes darker than normal one. Level of retardation depends on temperature, because of LC's character

Note (3) Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at +25°C.

3.1.2 Electrical Absolute Maximum Ratings

(V_{SS}=GND=0)

Parameter	Symbol	Min.	Max.	Unit	Remark
Power supply voltage	VCC	-0.5	4.5	V	


3.2 Electrical Characteristics

3.2.1 DC Electrical Characteristics of the TFT LCD

(Ta=25±2°C, V_{SS}=GND=0)

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Power supply	VCC	3.0	3.3	3.6	V	
Power Supply current	ICC		(20)	(30)	mA	Note 1

Note1: fv =60Hz , Ta=25°C , Display pattern : Black pattern





Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	5 / 24
------	--------

3.3 AC Timing Characteristic of The LCD

3.3.1 Timing Condition

Signal	Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
DCLK	DCLK frequency	Fclk	5	9	12	MHz	
	DCLK period	Tclk	83	110	200	ns	
Hsync	Period Time	Th	490	531	605	DCLK	
	Display Period	Thdisp	-	480	-	DCLK	
	Back Porch	Thbp	8	43	-	DCLK	
	Front Porch	Thfp	2	8	-	DCLK	
	Pulse Width	Thw	1	-	-	DCLK	
Vsync	Period Time	Tv	275	288	335	H	
	Display Period	Tvdisp	-	272	-	H	
	Back Porch	Tvbp	2	12	-	H	
	Front Porch	Tvfp	1	4	-	H	
	Pulse Width	Tvw	1	10	-	H	

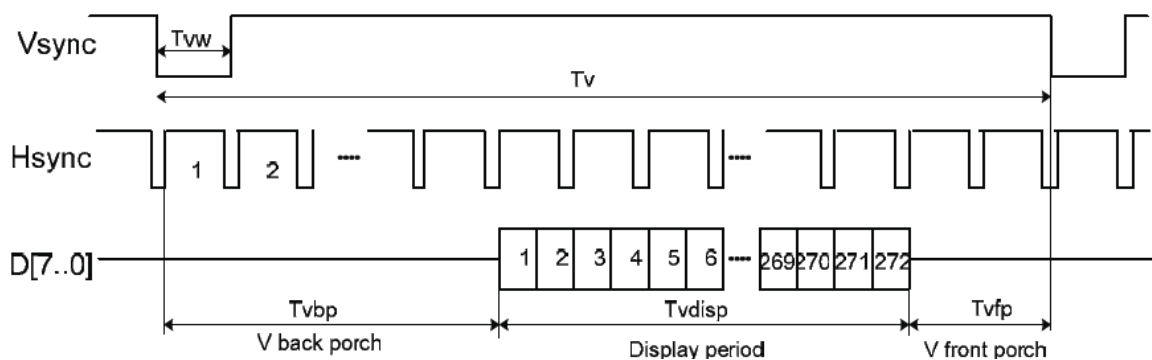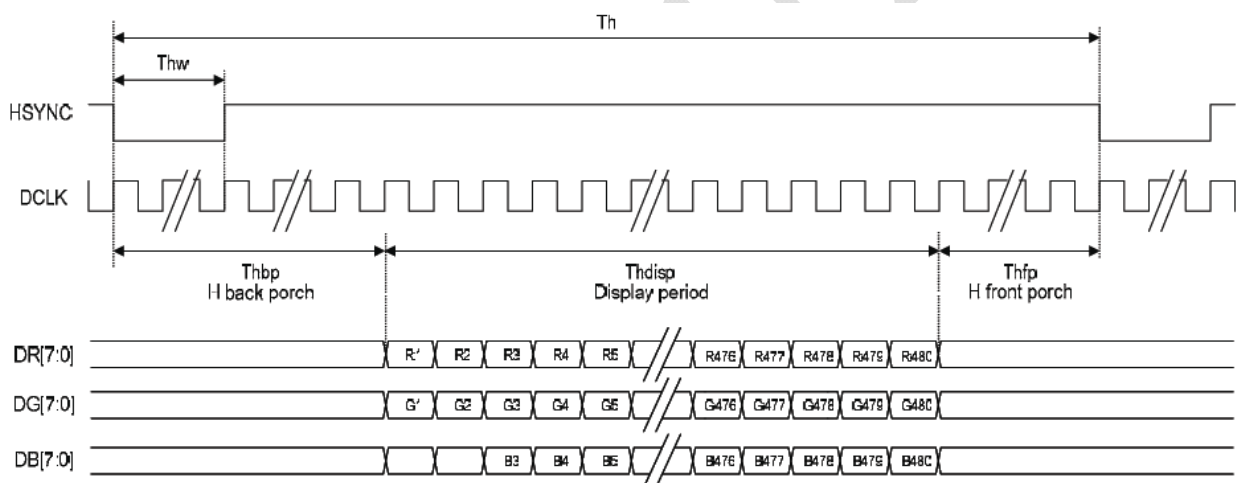


Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	6 / 24
------	--------

3.3.2 AC Timing Waveform

Parameter	Symbol	Min	Typ	Max	Unit
CLK pulse duty	Tcw	40	50	60	%
Hsync width	Thw	1.0	-	-	DCLK
Hsync period	Th	55	60	65	us
Vsync setup time	Tvst	12	-	-	ns
Vsync hold time	Tvhd	12	-	-	ns
Hsync setup time	Thst	12	-	-	ns
Hsync hold time	Thhd	12	-	-	ns
Data set-up time	Tdsu	12	-	-	ns
Data hold time	Tdhd	12	-	-	ns

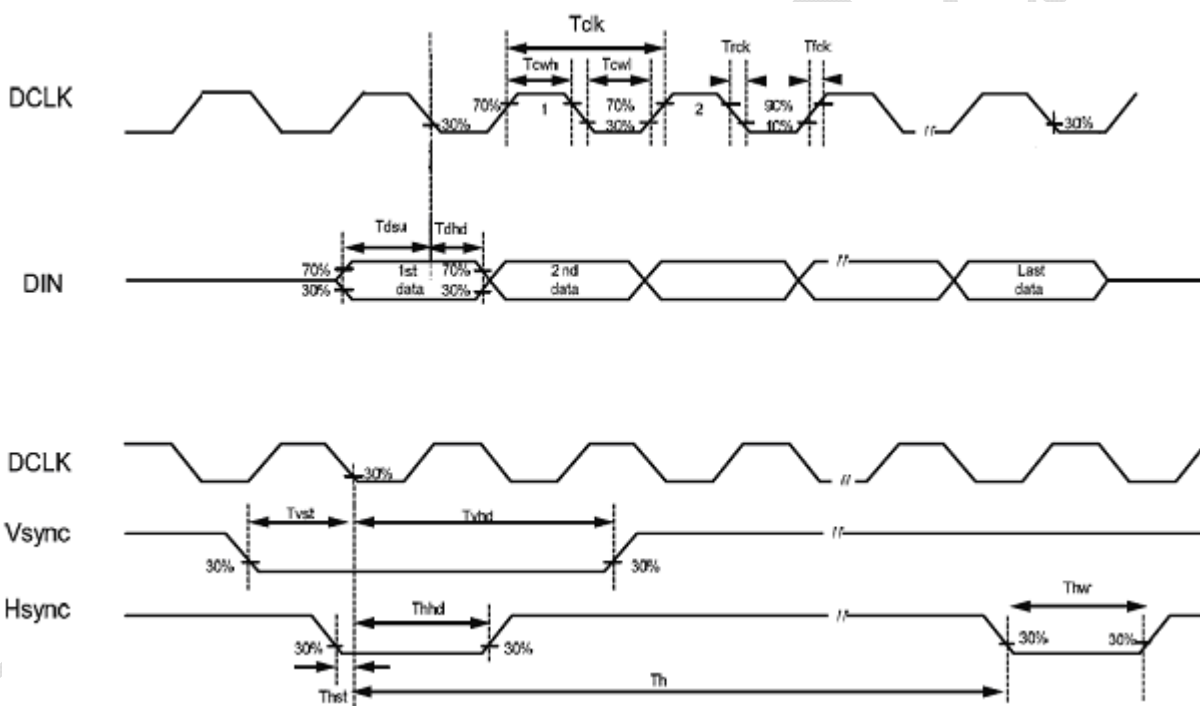

3.3.3 8080-series Interface Timing Condition

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
System Clock Frequency	f_{MCLK}	1	-	110	MHz	Note
System Clock Period	t_{MCLK}	1/ f_{MCLK}	-	-	ns	Note
Control Pulse High Width Write	t_{PWCSL}	13	1.5* t_{MCLK}	-	ns	
Control Pulse High Width Read	t_{PWCSL}	30	3.5* t_{MCLK}	-	ns	
Control Pulse Low Width Write(next write cycle)	t_{PWCSH}	13	1.5* t_{MCLK}	-	ns	
Control Pulse Low Width Write(next read cycle)	t_{PWCSH}	80	9* t_{MCLK}	-	ns	
Control Pulse Low Width Read	t_{PWCSH}	80	9* t_{MCLK}	-	ns	
Address Setup Time	t_{AS}	1	-	-	ns	
Address Hold Time	t_{AH}	2	-	-	ns	
Write Data Setup Time	t_{DSW}	4	-	-	ns	
Write Data Hold Time	t_{DHW}	1	-	-	ns	
Write Low Time	t_{PWLW}	12	-	-	ns	
Read Data Hold Time	t_{DHR}	1	-	-	ns	
Access Time	t_{ACC}	32	-	-	ns	
Read Low Time	t_{PWLr}	36	-	-	ns	
Rise Time	t_R	-	-	0.5	ns	
Fall Time	t_F	-	-	0.5	ns	
Chip select setup time	t_{CS}	2	-	-	ns	
Chip select hold time to read signal	t_{CSH}	3	-	-	ns	

Note : System Clock Denotes external input clock(PLL-bypass) or internal generated clock(PLL-enabled)


Reference input clock=10MHz.

About Command setting , Please refer to SSD1963.


Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	8 / 24
------	--------

3.3.4 Parallel 8080-series Interface Timing Diagram(Write Cycle)

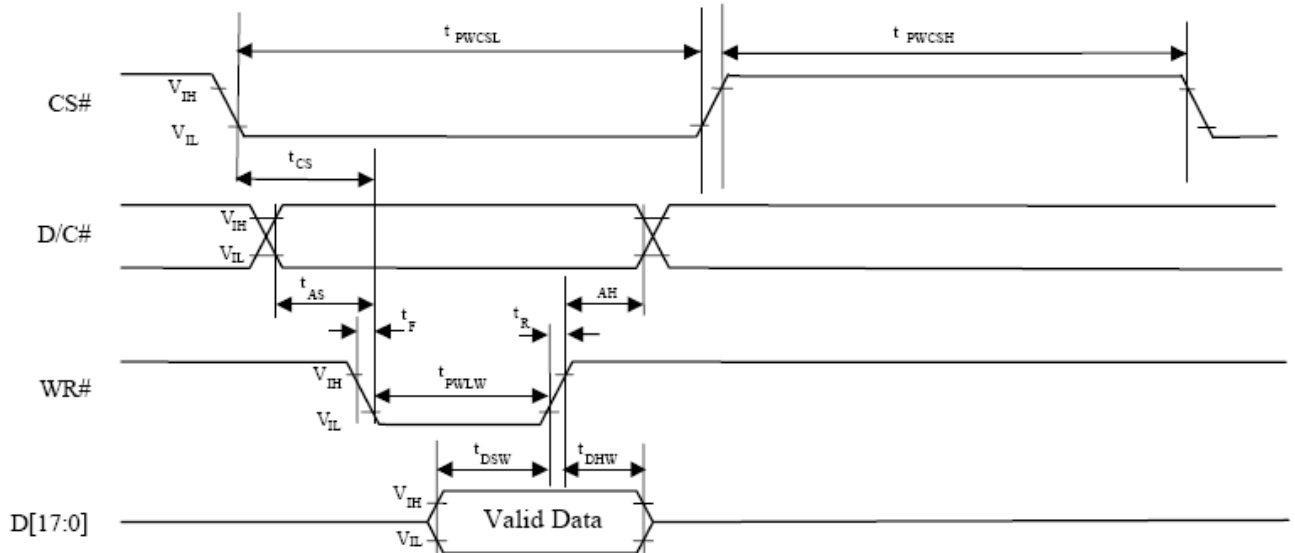

3.3.5 Parallel 8080-series Interface Timing Diagram(Read Cycle)

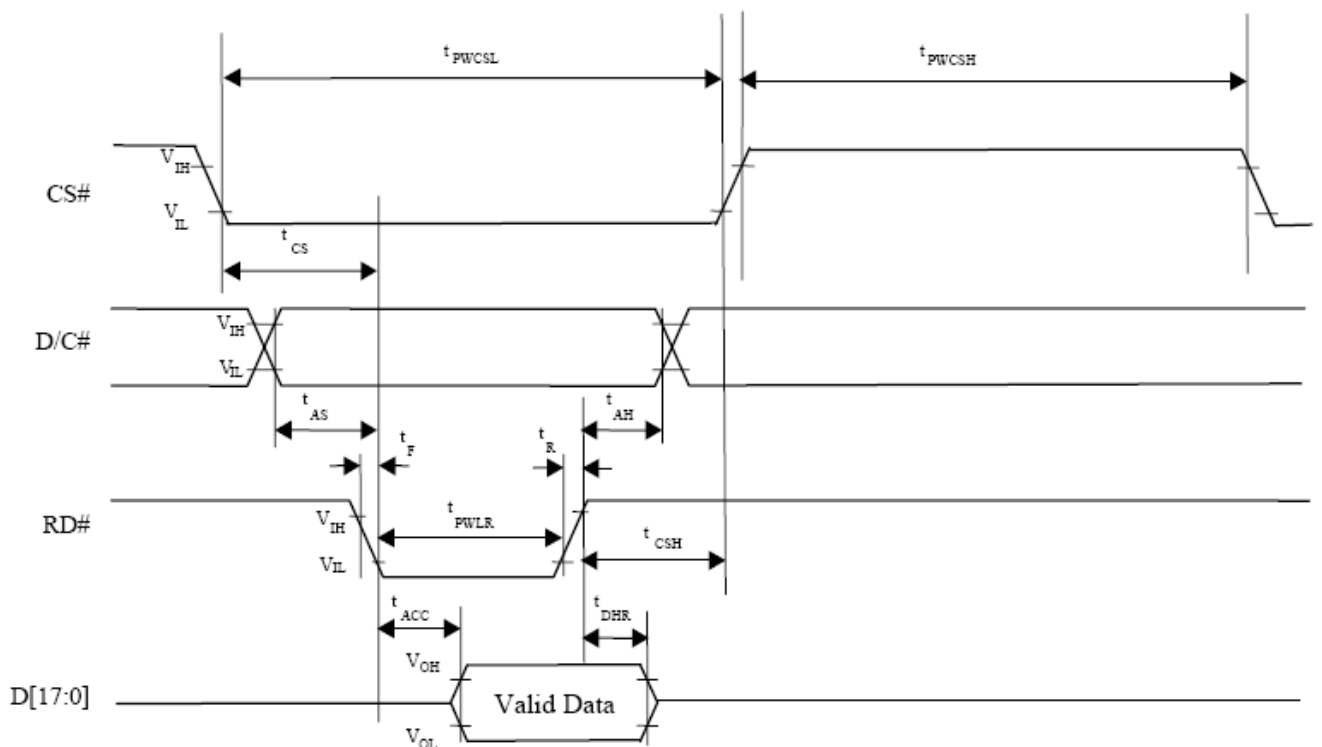

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	9 / 24
------	--------

3.3.6 Mapping for writing an Pixel Data

Interface	Cycle	D[23]	D[22]	D[21]	D[20]	D[19]	D[18]	D[17]	D[16]	D[15]	D[14]	D[13]	D[12]	D[11]	D[10]	D[9]	D[8]	D[7]	D[6]	D[5]	D[4]	D[3]	D[2]	D[1]	D[0]	
8 bits	1 st																		R7	R6	R5	R4	R3	R2	R1	R0
	2 nd																		G7	G6	G5	G4	G3	G2	G1	G0
	3 rd																		B7	B6	B5	B4	B3	B2	B1	B0

3.4 Back-Light Unit

The Back-light system is an edge-lighting type with 7 white LED(Light Emitting Diode)s. The characteristics of 7 white LEDs are shown in the following tables.

(Ta=25±2°C)

Item	Symbol	Value			Unit	Condition
		Min.	Typ.	Max.		
LED Voltage	V _L	(20.3)	(22.4)	(23.8)	V	
LED Current	I _f	-	20	25	mA	
Power Consumption	P _{LED}	-	(448)	(595)	mW	(2)
LED Life Time (25°C)	-	(20000)	-	-	hr	(3)

Note (1) LEDs in 7 series type.

(2) Where I_f = 20mA, V_L = 22.4, P_{LED} = V_L × I_f

(3) The environmental conducted under ambient air flow ,at Ta=25±2°C,60%RH±5%

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	10 / 24
------	---------

4. Optical Characteristics

4.1 Optical characteristic of the LCD

The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state.

Measuring equipment: BM-7A

(Ta=25±2°C , VCC =3.3V, I_f=20mA)

Item	Symbol	Condition	Min	Type	Max	Unit	Note
Brightness	--	--	(320)	(400)	--	cd/m ²	--
Response time	T _R	θ=0°	--	10	15	ms	--
	T _F		--	20	30	ms	
Contrast ratio	CR	At optimized viewing angle	(250)	(350)	--	--	--
Color Chromaticity	Red	R _X	(0.57)	(0.62)	(0.67)	--	--
		R _Y	(0.29)	(0.34)	(0.39)		
	Green	G _X	(0.29)	(0.34)	(0.39)	--	
		G _Y	(0.52)	(0.57)	(0.62)		
	Blue	B _X	(0.09)	(0.14)	(0.19)	--	
		B _Y	(0.05)	(0.10)	(0.15)		
	White	W _X	(0.27)	(0.32)	(0.37)	--	
		W _Y	(0.29)	(0.34)	(0.39)		
Viewing Angle (6H)	Hor.	θ _R	50	(65)		Degree	--
		θ _L	50	(65)			
	Ver.	θ _U	40	(50)			
		θ _D	50	(60)			

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------


Page	11 / 24
------	---------

a. Test equipment setup

After stabilizing and leaving the panel alone shall be warmed up for the stable operation of LCM, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7(fast) with a viewing angle of 2° at a distance of 50cm and normal direction.

b. Definition of response time: Tr and Tf

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

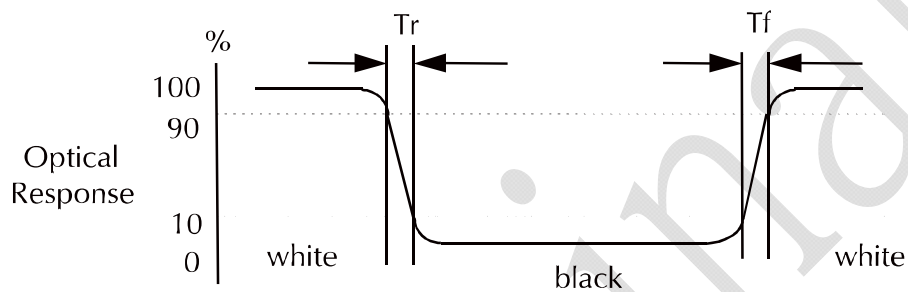

c. Definition of contrast ratio:


$$\text{Contrast Ratio (CR)} = \frac{\text{Brightness measured when LCD is at "white state"}}{\text{Brightness measured when LCD is at "black state"}}$$

d. Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	12 / 24
------	---------

e. View Angle

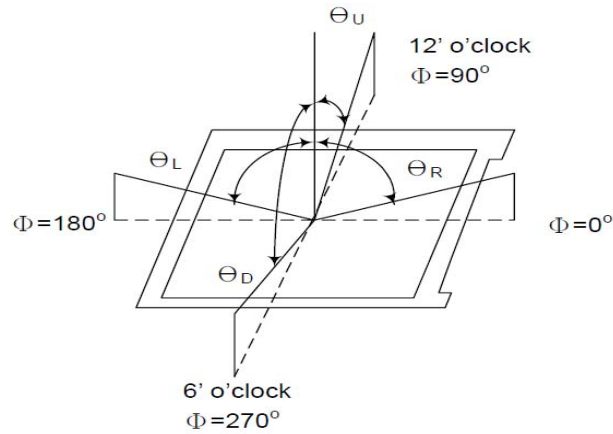

f. Definition of Luminance of White: Luminance of white at the center points

Light Source of Back-Light Unit	LED Type
---------------------------------	----------


g. Definition of White Uniformity

$$\text{White Uniformity} = \frac{\text{Min. luminance of white among 9-points}}{\text{Max. luminance of white among 9-points}}$$

h. The definition of Color Gamut -Color Chromaticity CIE 1931

Color coordinate of white & red, green, blue at center point.

Color Gamut : NTSC(%) = (RGB Triangle Area / NTSC Triangle Area) x 100

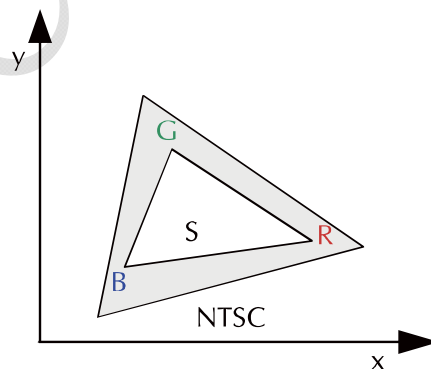

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	13 / 24
------	---------

5. I/O Terminal

5.1 Pin Assignment

Pin No.	Symbol	I/O	Function	Remark
1	VCC	P	Power supply	
2	VCC	P	Power supply	
3	GND	P	GND	
4	GND	P	GND	
5	/RST	I	Reset signal	
6	NC	-	No connect	
7	/WAIT	O	Tearing effect	
8	C68	I	MCU interface configuration 1: 8080 Interface	
9	/CS	I	Chip select	
10	RS	I	Data/Command select	
11	/RD_E	I	8080 mode: RD# (read strobe signal)	
12	/WR_RW	I	8080 mode: WR# (write strobe signal)	
13	GND	P	GND	
14	DB0	IO	Data bus 0	(1)
15	DB1	IO	Data bus 1	(1)
16	DB2	IO	Data bus 2	(1)
17	DB3	IO	Data bus 3	(1)
18	DB4	IO	Data bus 4	(1)
19	DB5	IO	Data bus 5	(1)
20	DB6	IO	Data bus 6	(1)
21	DB7	IO	Data bus 7	(1)
22	NC	-	No connect	(1)
23	NC	-	No connect	(1)
24	NC	-	No connect	(1)
25	NC	-	No connect	(1)
26	NC	-	No connect	(1)
27	NC	-	No connect	(1)
28	NC	-	No connect	(1)
29	NC	-	No connect	(1)
30	GND	P	GND	

31	NC	-	No connect	
32	NC	-	No connect	
33	GND	P	GND	
34	GND	P	GND	
35	XR	O	Touch panel Right	
36	YD	O	Touch panel Down	
37	XL	O	Touch panel Left	
38	YU	O	Touch panel Up	
39	LED A	P	Backlight Anode	
40	LED K	P	Backlight Cathode	


NOTE:

1. DATA Pins not used should be floating

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	15 / 24
------	---------

5.2 Block Diagram

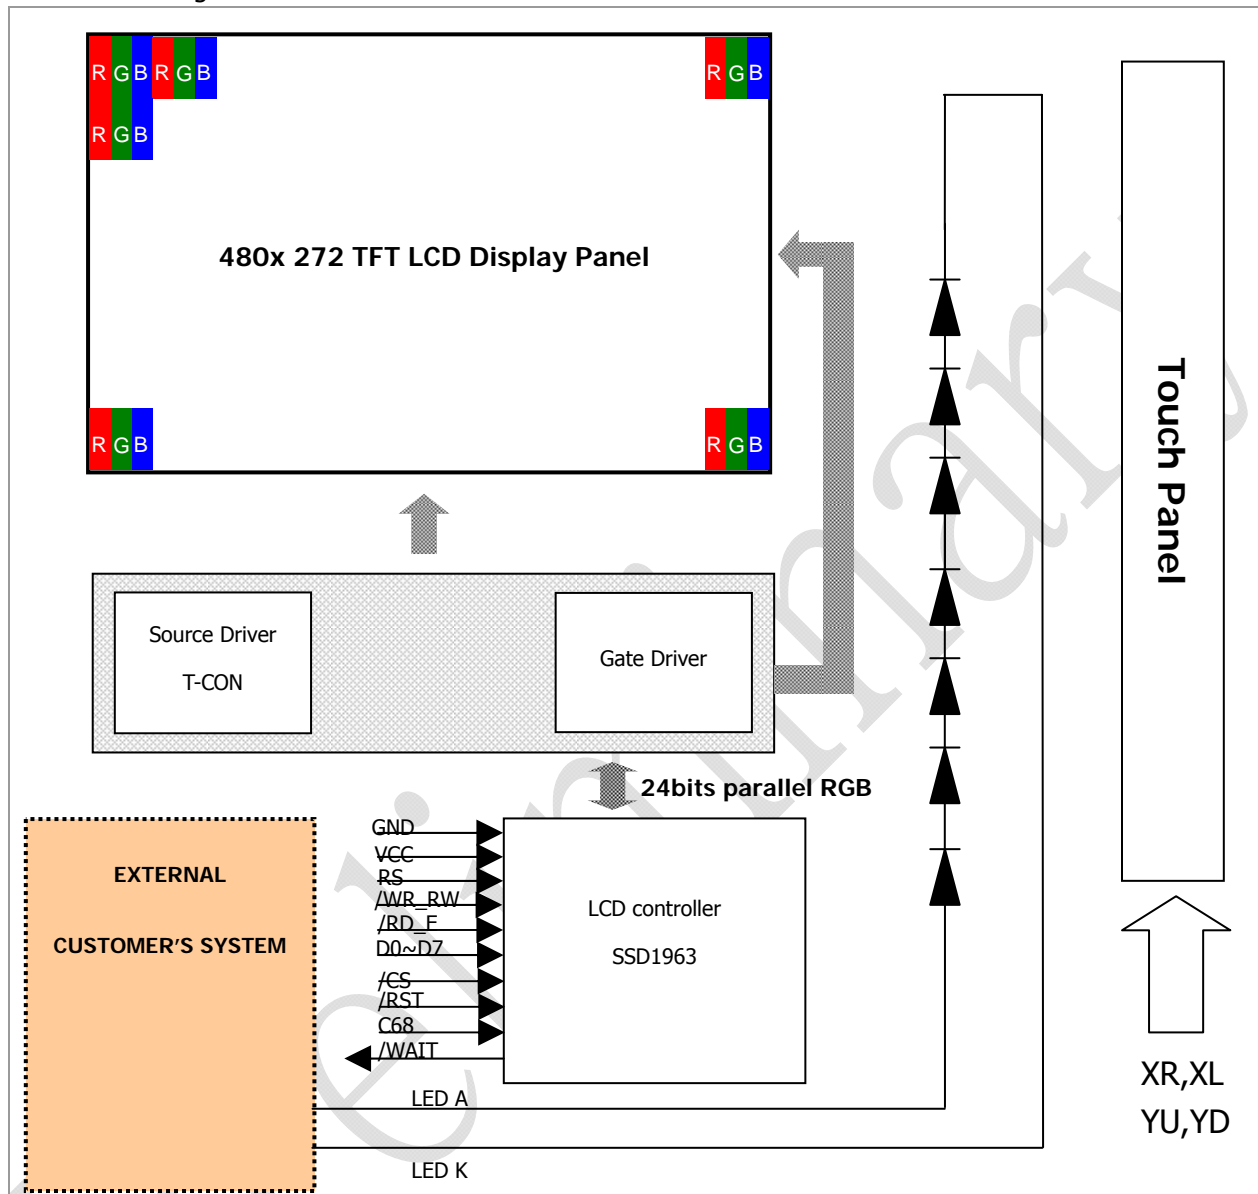

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	16 / 24
------	---------

5.3 Basic Display Color and Gray Scale

	Color & Gray Scale	Data Signal																							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(0)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(0)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Red(31)	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Red(62)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red(63)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Green(31)	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Green(62)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
	Green(63)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	
Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Blue(31)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	

Each basic color can be displayed in 256 gray scales from 8 bit data signals. With the combination of total 24 bit data signals, the 16.7M-color display can be achieved on the screen.

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	17 / 24
------	---------

6. Touch Screen Panel Specifications

6.1 Electrical Characteristics

Item	Min.	Typ.	Max.	Unit	Note
Linearity	-1.5	-	1.5	%	Analog X and Y directions
Terminal resistance	(500)	-	(1300)	Ω	X (Glass side)
	(100)	-	(540)	Ω	Y (Film side)
Insulation resistance	20	-	-	MΩ	DC 25V
Voltage	-	5.0	7.0	V	DC
Chattering	-	-	10	ms	100kΩ pull-up

6.2 Mechanical & Reliability Characteristics

Item	Min.	Typ.	Max.	Unit	Note
Activation force	60		100	g	
Durability-surface scratching	Write 100,000	-	-	characters	
Durability-surface pitting	1,000,000	-	-	touches	
Surface hardness	3	-	-	H	JIS K5400,ASTM D3363

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	18 / 24
------	---------

7. Reliability Condition


No change on display and in operation under the following test condition.

Condition: Unless otherwise specified, tests will be conducted under the following condition.

Temperature: 20±5°C.

Humidity: 65±5%RH.


Tests will be not conducted under functioning state.

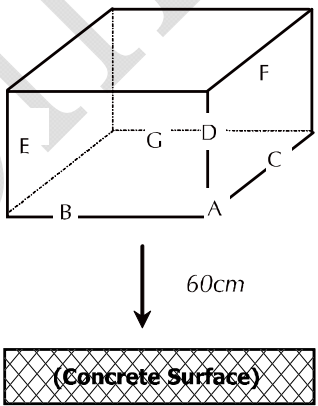No.	Parameter	Condition	Notes
1	High Temperature Operating	70°C±2°C, 240hrs (Operation state).	-
2	Low Temperature Operating	-20°C±2°C, 240hrs (Operation state).	-
3	High Temperature Storage	80°C±2°C, 240hrs.	-
4	Low Temperature Storage	-30°C±2°C, 240hrs.	-
5	High Temperature and High Humidity Operation Test	50°C±2°C, 90%, 240hrs.	-
6	Vibration Test	Total fixed amplitude: 1.5mm. Vibration Frequency: 10~55Hz. One cycle 60 seconds to 3 direction of X, Y, Z each 15 minutes.	-
7.	Drop Test	<p>To be measured after dropping from 60cm high on the concrete surface in packing state.</p>  <p><i>Dropping method corner dropping:</i></p> <p><i>A corner: Once edge dropping.</i></p> <p><i>B, C, D edge: Once face dropping.</i></p> <p><i>E, F, G face: Once.</i></p>	-

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	19 / 24
------	---------

8. Dimensional Outlines

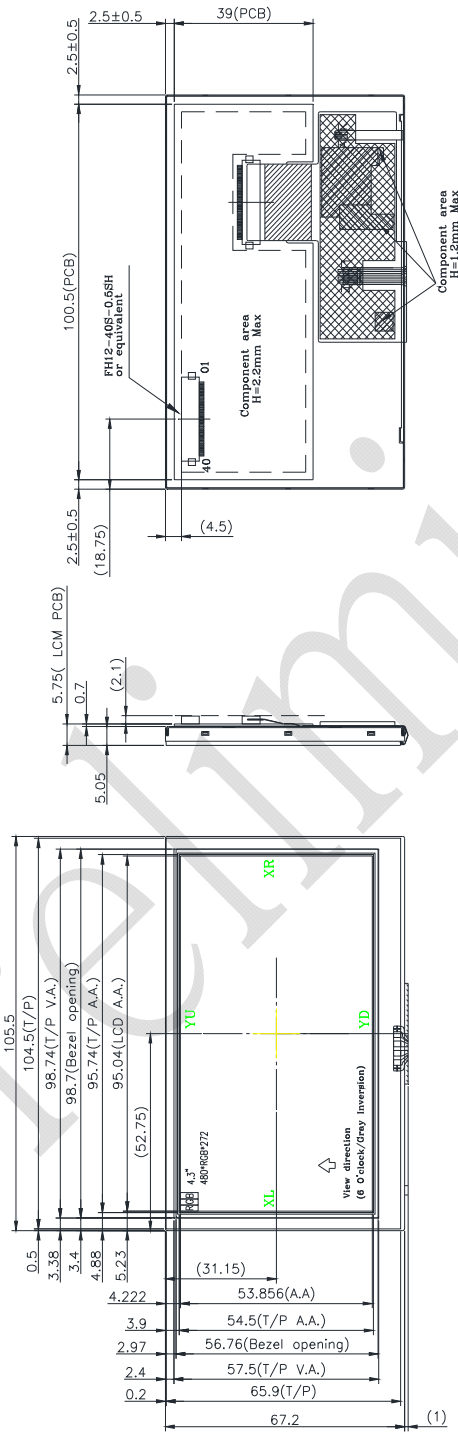

PIN	FUNCTION	SYMBOL
1	VCC	21
2	VCC	22
3	GND	23
4	GND	24
6	RS*	26
6	NC	26
7	VA*	27
8	CS*	28
9	CS*	28
10	RS	30
10	GND	30
11	RD*/E	31
11	NC / VLED3.3V	31
12	WR*/RW	32
12	NC / PWM	32
13	GND	33
14	DB0	34
15	DB1	35
16	DB2	36
17	DB3	37
18	DB4	38
19	DB5	39
19	LED A / NC	39
20	DB6	40
20	LED K / NC	40

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------


Page	20 / 24
------	---------

9. Incoming Inspection Standards

9.1 Inspection and Environment Conditions

9.1.1 Inspection Conditions:

- (1) Inspection Distance: 35 cm±5cm
- (2) View Angle : Light-on Inspection Angle : ±5°
Cosmetic Inspection Angle : ±45°

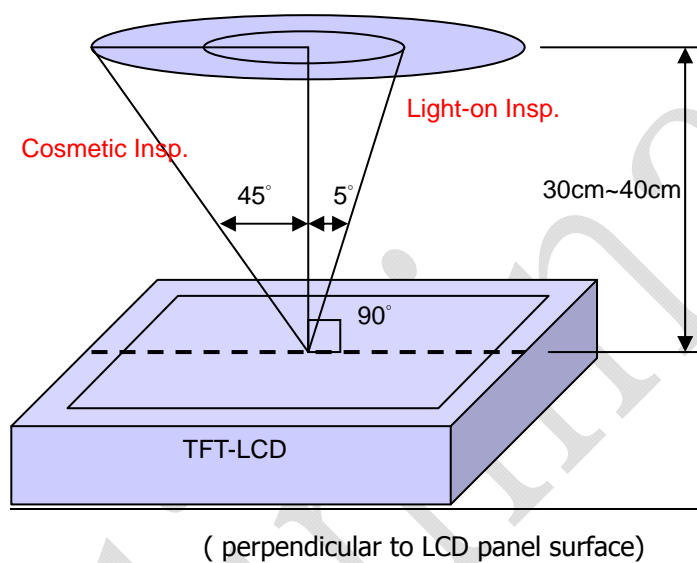

9.1.2 Environment Conditions:

Ambient Temperature		23°C ±5°C
Ambient Humidity		55±10%RH
Ambient Illumination	Cosmetic Inspection	more than 600 Lux
	Functional Inspection	300~500 Lux

9.1.3 Sampling Conditions:

- (1) Lot Size: Quantity of shipment lot per model
- (2) Sampling Method:

Sampling Plan		MIL-STD-105E
		Normal Inspection, Single Sampling
		Level II
AQL	Major Defect	1.0%
	Minor Defect	1.5%



(3) The classification of Major(MA) and Minor(MI) defects is shown as 3. Inspection Criteria.

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	21 / 24
------	---------

9.1.4 Inspection Criteria

9.1.4.1 Cosmetic Inspection(Panel):

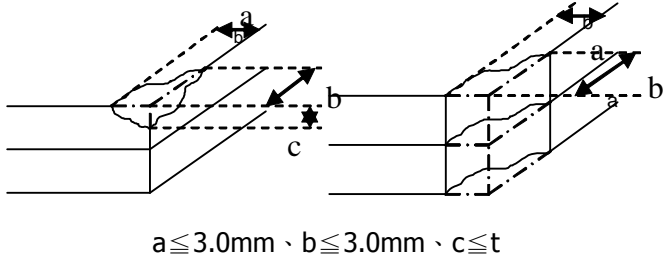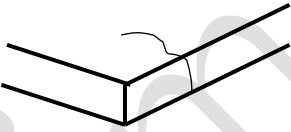Item	Judgment Criteria	Classification
Chipping on Panel	 <p style="text-align: center;">$a \leq 3.0\text{mm} \cdot b \leq 3.0\text{mm} \cdot c \leq t$ (Bottom glass thickness)</p>	MA
Scratch on Panel *Note-2	<p style="text-align: center;">$W \leq 0.05\text{mm}$ or $L < 5\text{mm}$: Ignored $0.05\text{mm} < W \leq 0.1\text{mm}$ and $L \leq 5\text{mm}$: $N \leq 5$ $W > 0.1\text{mm}$ or $L > 5\text{mm}$: Not allowed</p>	MI
Bubble or Dent on Panel *Note-3	<p style="text-align: center;">$D \leq 0.2\text{mm}$: Ignored $0.2\text{mm} < D \leq 0.3\text{mm}$: $N \leq 5$ $D > 0.3\text{mm}$: Not allowed</p>	MI
Panel Crack	 <p style="text-align: center;">Not Allowed crack</p>	MA
Bezel Deformation	Obvious deformation is not allowed.	MI
Bezel Oxidation	Not allowed if it rusts continuously over 1 cm (It is out of warranty with rusted tin plate)	MI
Bezel Scratch	$L \leq 20\text{mm}$, $W \leq 0.2$, $N \leq 3$	MI
Metal Squash Dent /Flange(Front Side)	$D(W) \leq 1, L \leq 3, N \leq 3;$	MI
B/L High Voltage Wire Denudation	Not allowed	MA
Polarizer flaw or leak out resin	Defect is defined as the active area.	MI
Outline Dimension	Must in Spec, refer to related product spec.	MI

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	22 / 24
------	---------


9.1.4.2 Functional Inspection:

Item	Judgment Criteria			Classification
	Area(Note1)	I	O	
Point Defect	Bright dot	Random	2	
		2 dots adjacent	0	0
		3 dots adjacent or more	0	0
	Dark dot	Random	3	
		2 dots adjacent	0	
		3 dots adjacent or more	0	0
	Total Dot Defect		5	
	Distance	Distance between Bright and Bright dot	$L \geq 5\text{mm}$	
		Distance between Bright and Dark dot	$L \geq 5\text{mm}$	
		Distance between Dark dot	$L \geq 5\text{mm}$	
(1) It is defined as Point Defect if defect area $> 0.5\text{dot}$ (2) It is ignored if defect area $\leq 0.5\text{dot}$ (3) Weak point defect will be defined as Bright Dot if it can be observed through ND filter 5% (Full Screen Black Inspection)				
Line Defect	Obvious vertical or horizontal line defect is not allowed.			MA
Mura	Not allowed if it can be observed through ND Filter 5 %			MI
Foreign Material in spot shape *Note-3	$D \leq 0.2\text{mm}$: Ignored $0.2\text{mm} < D \leq 0.5\text{mm}$: $N \leq 8$ $D > 0.5\text{mm}$: Not allowed			MI
Foreign Material in line or spiral shape *Note-4	$W \leq 0.05\text{mm}$ or $L \leq 5\text{mm}$: Ignored $0.05\text{mm} < W \leq 0.2\text{mm}$ and $L 1.0\text{mm} \leq 5\text{mm}$: $N \leq 8$ $W > 0.2\text{mm}$ or $L > 5\text{mm}$: Not allowed			MI
Display Function Abnormal	No Malfunction can be allowed			MA


Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	23 / 24
------	---------


Note-1 : I/O Area Definition

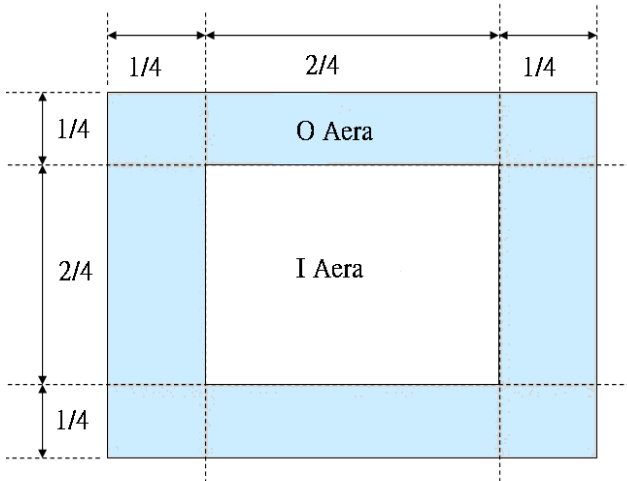


Note-2 : Polarizer Scratch

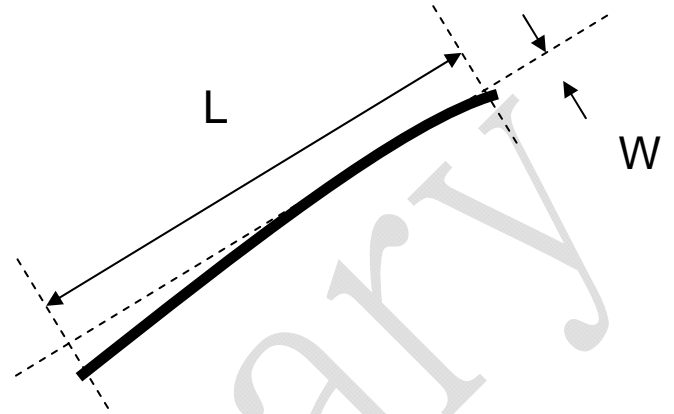

Note-3 : Spot Foreign Material
($W \geq L / 4$)

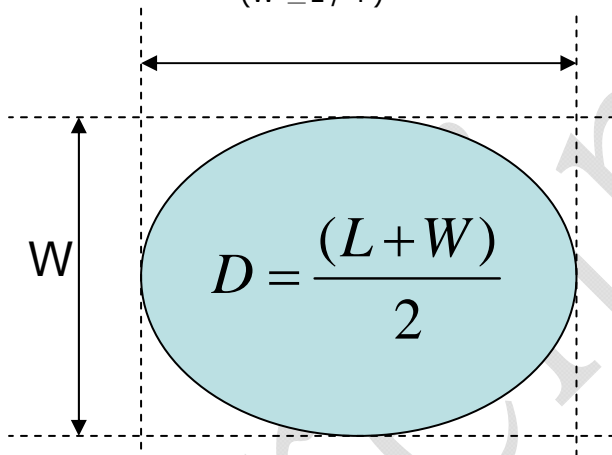

Note-4 : Line or Spiral Foreign Material
($W < L / 4$)

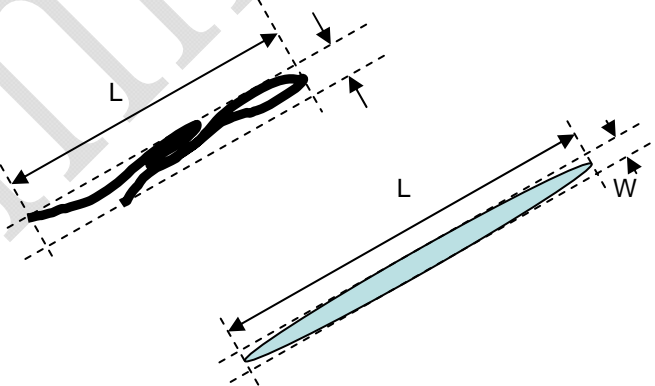

Product No.	DET043QQNCRSS-1A	REV. A
-------------	------------------	--------

Page	24 / 24
------	---------