


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, manufacturing and reproduction rights thereto.

REVOLUTIONS		DATE	APPROVED
REV.	DESCRIPTIONS		
-	Released on ECN #1091	11/15/00	M. A.

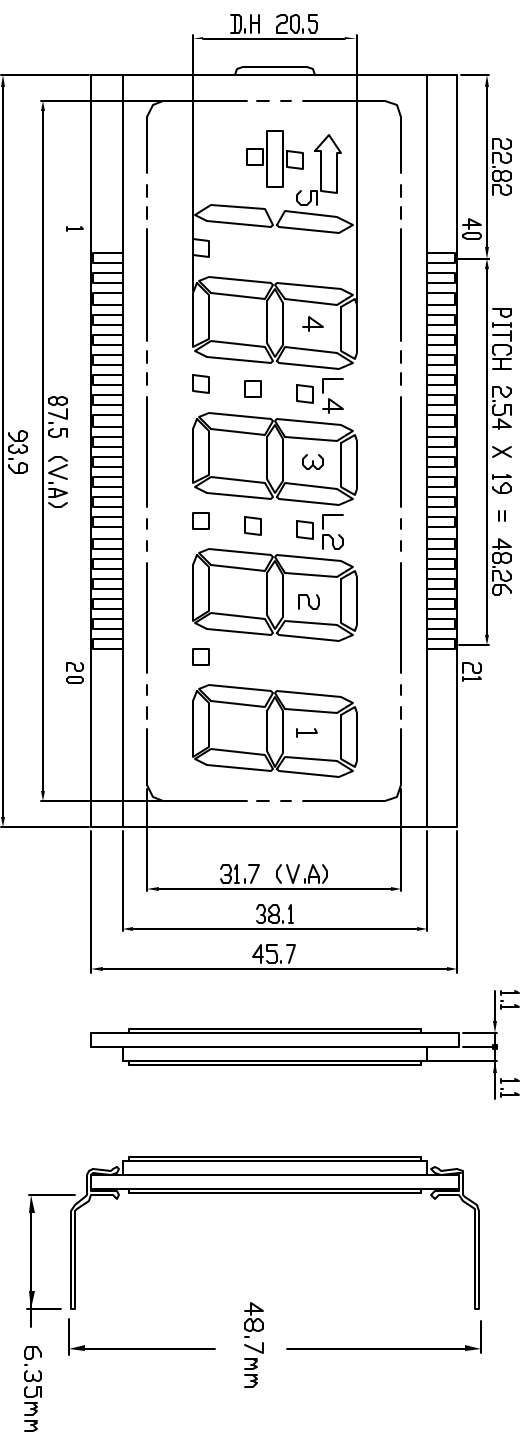

PINOUT:

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	CDM	11	3C	21	1a	31	3f
2	-	12	3DP	22	1f	32	3g
3	5bc	13	2e	23	1g	33	L4
4	5DP	14	2d	24	2b	34	4b
5	4e	15	2C	25	2a	35	4a
6	4d	16	2DP	26	2f	36	4f
7	4C	17	1e	27	2g	37	4g
8	4DP	18	1d	28	L2	38	4c
9	3e	19	1c	29	3b	39	1
10	3d	20	1B	30	3a	40	CDM


Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-1091-XZ-W	ZEBRA TYPE	PIN TYPE
	DG-1091-XP-W	

Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'f' for Transmissive Polarizer, added -W for Wide Temp.



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN mm TOLERANCES ARE:		APPROVALS	DATE	TITLE
X = ± 0.3		DRAWN		DENSITRON TECHNOLOGIES PLC.
.XX = ± 0.05		CHECKED		LCD SEGMENTED GLASS
CAGE CODE #DWSS2		ISSUED		DWG. NO. DG-1091
				SHEET 1 OF 1