


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, and manufacturing and reproduction rights thereto.


REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/15/00	M. A.

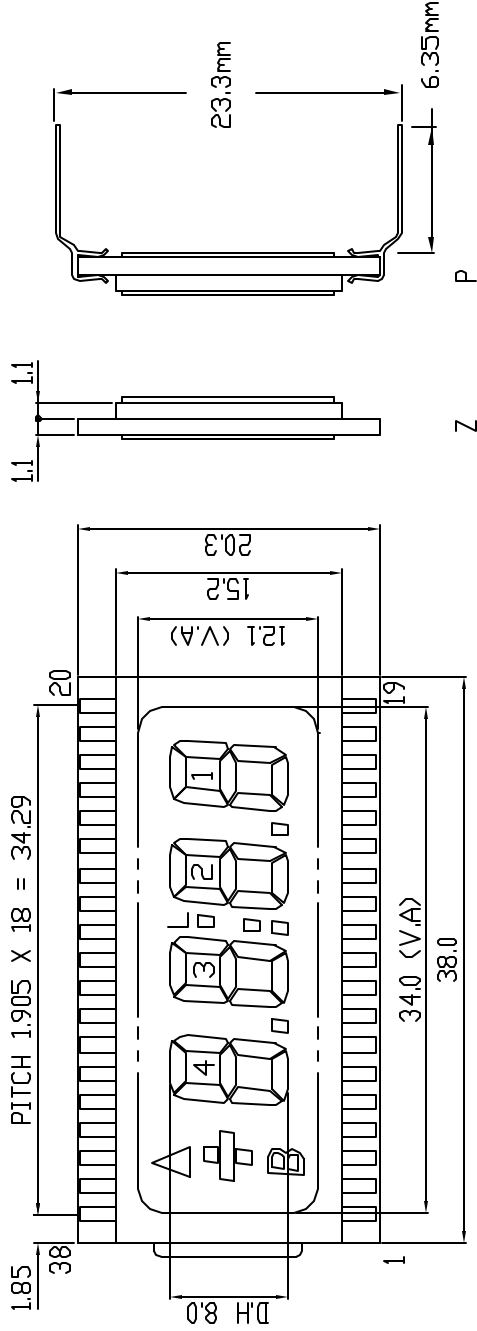

PINOUT:

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	COM	11	2e	21	1a	31	3f
2	B	12	2e	22	1f	32	4g
3	4e	13	2c	23	2g	33	4b
4	4d	14	2DP	24	2b	34	4a
5	4c	15	1e	25	2a	35	4f
6	4DP	16	1d	26	2f	36	-
7	3e	17	1c	27	L	37	!
8	3d	18	1g	28	3g	38	▲
9	3c	19	NC	29	3b		
10	3DP	20	1b	30	3a		



Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-815-XZ-W	ZEBRA TYPE	DG-815-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective Polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, added -W for Wide Temp.			

APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
DRAWN		TITLE LCD SEGMENTED GLASS	
CHECKED		DWG. NO. DG-815	
ISSUED		SHEET 1 OF 1	

Unless otherwise specified:
 Dimensions are mm
 Tolerances are:
 X = ± 0.5
 .XX = ± 0.05
 CAGE CODE #DVSSE